

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☐ other Dry hole

2. NAME OF OPERATOR  
SUPRON ENERGY CORPORATION

3. ADDRESS OF OPERATOR  
P.O. Box 808, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 800 ft./N ; 1080 ft./W line  
AT TOP PROD. INTERVAL: Same as above  
AT TOTAL DEPTH: Same as above


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

☐  
☐  
☐  
☐  
☐  
☐  
☐  
☒

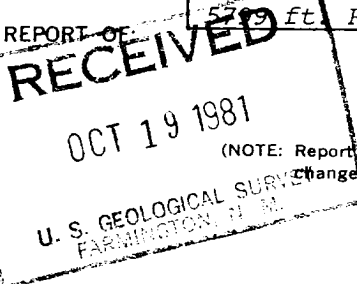

5. LEASE

SF 078464

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Federal "A"

9. WELL NO.

1-E

10. FIELD OR WILDCAT NAME

Undesignated Fruitland

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 25, T-31N, R-13W, N.M.P.M.

12. COUNTY OR PARISH

San Juan

13. STATE

New Mexico

14. API NO.


15. ELEVATIONS (SHOW DF, KDB, AND WD)

579 ft. R.K.B.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1. Set packer at 1735 ft. R.K.B.
2. Established pump rate into perforations (1992 ft. - 2013 ft.) of 4 B.P.M. at 300 P.S.I.
3. Pumped 150 sacks of class "B" cement with 2% calcium chloride. Final pump pressure 2000 P.S.I.
4. Drilled out cement to 2100 ft. R.K.B.
5. Pressure-tested casing to 1500 P.S.I. for 25 minutes. Held OK.
6. Job completed 10-7-81.



Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Kenneth E. Roddy TITLE Production Supt. DATE October 15, 1981

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_ ACCEPTED FOR RECORD

CONDITIONS OF APPROVAL, IF ANY:

NOV 12 1981

\*See Instructions on Reverse Side

FARMINGTON DISTRICT

BY RB

NM000