

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.
5. LEASE DESIGNATION AND SERIAL NO.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☒ Dry hole	6. 14-38-600-3532 LEASE NAME
2. NAME OF OPERATOR Miami Oil Producers, Inc.	7. UNIT AGREEMENT NAME Navajo-Ute
3. ADDRESS OF OPERATOR P. O. Drawer 2040 - Abilene, Texas	8. FARM OR LEASE NAME Navajo-Ute 3532-A
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 330' FSL x 690' FWL Sec. 16-32N-16W, NMPM	10. FIELD AND POOL, OR WILDCAT #1
14. PERMIT NO.	11. WILDCAT , OR BLK. AND SURVEY OR AREA
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 5698' KB; 5697' IF; 5691' GL	12. Sec. 15-32N-16W, NMPM
16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data	San Juan New Mexico

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☒	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACTURE TREAT ☐	MULTIPLE COMPLETE ☐	FRACTURE TREATMENT ☐	ALTERING CASING ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☒	SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☒
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) ☐	

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Well was spud 10/8/64. Drilled 136' of 12½" hole, ran 6 jts. of 8-5/8" J-55 24# surface casing, set at 172', cemented with 60 sx Neat cement, 2% cc. Well was drilled to TD of 2050, with no encounter of shows of oil or gas. Schlumberger Induction-Electrical and Formation Density logs were run on 10/12/64. Log tops as follows:

Mancos	525
Lower Gallup	1874
Sanastee	2023
TD	2050


Well was plugged in accordance with instructions from USGS, as follows:
Plug No. 1: 475 to 575' with 30 sx cement
Plug No. 2: 150 to 200' with 15 sx cement
Plug No. 3: 0 to 20' with 10 sx cement
Steel well marker was placed in top of surface casing.

There were no cores or tests.

18. I hereby certify that the foregoing is true and correct

SIGNED *Sam H. Long* TITLE **Representative** DATE **Oct. 29, 1964**

(This space for Federal or State office use)

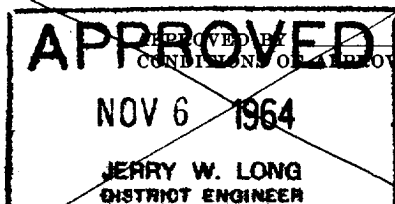


TITLE _____ DATE _____



*See Instructions on Reverse Side

U. S. GEOLOGICAL SURVEY
DURANGO, COLO.



OCT 30 1964

U. S. GEOLOGICAL SURVEY

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations; and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1963-O-685229
887-851

