

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87401
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

HOBBS OCD

SEP 12 2013

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30- 025-22731
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. B2516
7. Lease Name or Unit Agreement Name Aztec State
8. Well Number 10
9. OGRID Number 16696
10. Pool name or Wildcat Maljamar GBST
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4206'

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
OXY USA Inc.

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
Unit Letter A : 660 feet from the north line and 660 feet from the east line
Section 8 Township 17S Range 33E NMPM County Lea

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-4615' PBD-4510' Perfs-4302-4434'

8-5/8" 28# csg @ 359' w/ 250sx, 11" hole, TOC-Surf-Circ
5-1/2" 15.5# csg @ 4613 w/ 250sx, 7-7/8" hole, TOC-3575'-TS

1. RIH & set CIBP @ 4252', M&P 25sx cmt to 4100'
2. Perf @ 2570', sqz 35sx cmt to 2470' WOC-Tag
3. Perf @ 1550', sqz 50sx cmt to 1400' WOC-Tag
4. Perf @ 409' sqz 135sx cmt to surface
10# MLF between plugs
Above ground steel tanks will be utilized.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 9/2/13

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE DIST. MGR DATE 9-19-2013

Conditions of Approval (if any):

OIL CONSERVATION DIVISION - Hobbs office **Must Be Notified**
24 hours prior to the beginning of Plugging Operations.

SEP 23 2013

OXY USA Inc. - Current
Aztec State #10
API No. 30-025-22731


11" hole @ 359'
8-5/8" csg @ 359'
w/ 250sx-TOC-Surf-Circ

7-7/8" hole @ 4615'
5-1/2" csg @ 4613'
w/ 250sx-TOC-3575'-TS

Perfs @ 4302-4434'

PB-4510'

TD-4615'

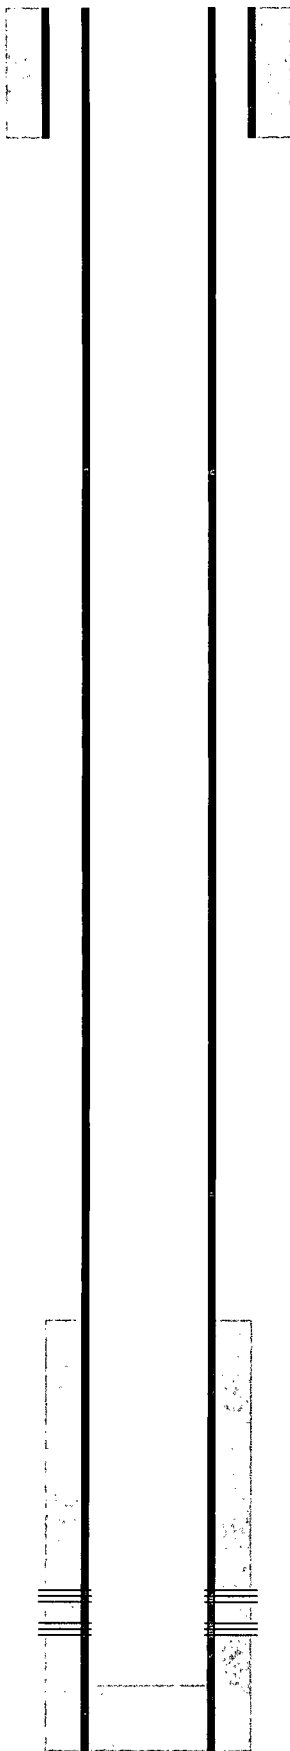

OXY USA Inc. - Proposed
Aztec State #10
API No. 30-025-22731

135sx @ 409'-Surface


11" hole @ 359'
8-5/8" csg @ 359'
w/ 250sx-TOC-Surf-Circ

50sx @ 1550-1400' WOC-Tag

35sx @ 2570-2470' WOC-Tag

CIBP @ 4252' w/ 25sx to 4100'

PB-4510'

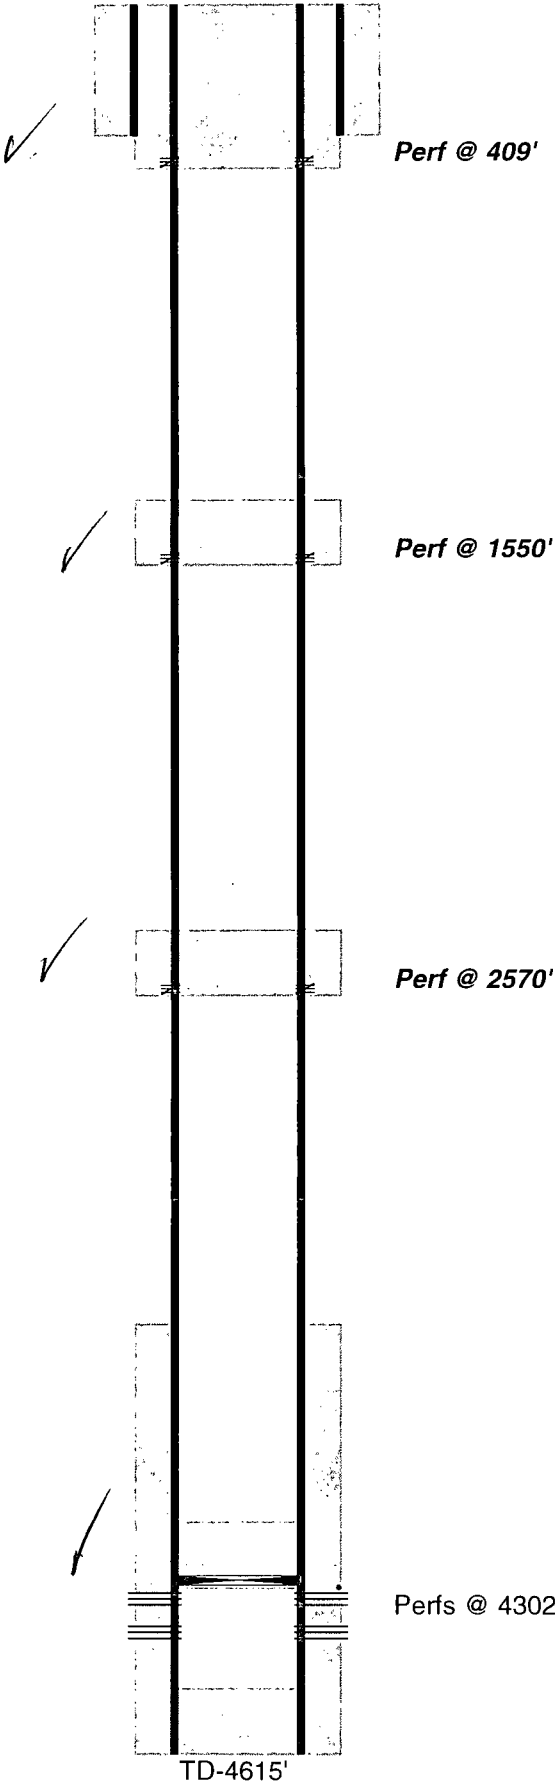

Perf @ 409'

Perf @ 1550'

Perf @ 2570'

7-7/8" hole @ 4615'
5-1/2" csg @ 4613'
w/ 250sx-TOC-3575'-TS

Perfs @ 4302-4434'

TD-4615'