

NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE OBLIGATION PLAT

HOBBS OFFICE O. C. C.

MAR 17 10 AM '66

PAN AMERICAN PETROLEUM CORP.

157 EAST CADIZ

SAN ANDRES


CHIVEROO SAN ANDRES

40

1. Each well is to be dedicated to the oil and gas contained in the well and the acreage immediately surrounding the well (interest and royalty).
2. If a well is dedicated to the oil and gas contained in the well and the acreage immediately surrounding the well, the interest in the well and the acreage immediately surrounding the well shall be held in trust for the benefit of the oil and gas contained in the well and the acreage immediately surrounding the well.
3. The interest in the well and the acreage immediately surrounding the well shall be held in trust for the benefit of the oil and gas contained in the well and the acreage immediately surrounding the well.
4. The interest in the well and the acreage immediately surrounding the well shall be held in trust for the benefit of the oil and gas contained in the well and the acreage immediately surrounding the well.

Area Superintendent
Pan American Petroleum Corp.
2-28-66

Handwritten notes in the bottom left corner, including "1-1-66" and "2-28-66".

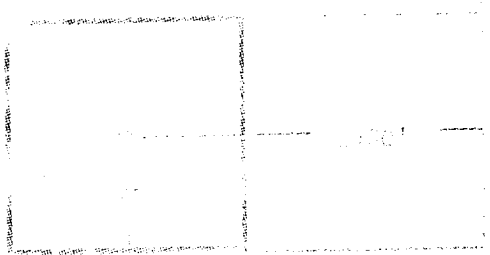

Handwritten signature in the bottom right corner.

COUNTY	ROOSEVELT	FIELD	Chaveros	STATE	NM
OPR	PAN AMERICAN PETROLEUM CORP.				MAP
	2 Bradley, Joy Ruth				
	Sec. 24, T-7-S, R-33-E				CO-ORD
	660' FSL, 1980' FEL of Sec.				MX 10463
	Spd 3-27-66				
	Cmp 4-16-66				
		CLASS		EL	
	FORMATION	DATUM	FORMATION	DATUM	
CSG & SX - TUBING					
8 5/8" 445' 250					
4 1/2" 4378' 800					
LOGS EL GR RA IND HC A					
	TD 4378', PBD 4340'				

IP San Andres Perfs 4141-4260' Flwd 141 BOPD. Pot. Based on 24 hr test thru 19/64" chk., TP 300#, CP 1000#, Gravity 25.5, GOR 827.

Distribution limited and publication prohibited by subscribers' agreement.
 Reproduction rights reserved by Williams & Lee Scouting Service, Inc.

CONT.	Cactus Drig. Co.	PROP DEPTH	4350'	TYPE
DATE				

F.R. 3-3-66; Opr's Elev. 4332' KB
 PD 4350' - SA
 Contractor - Cactus Drig. Co.
 3-28-66 TD 445', WOC.
 4-4-66 Drig. 4330'.
 4-11-66 TD 4378', PBD 4340', rec'g load.
 Perf @ 4141', 4187', 4204', 4212', 4221',
 4227', 4235', 4245', 4248', 4260' W/I SPI
 Ac (4141-4260') 2000 gals
 Frac (4141-4260') 30,000 gals oil +
 27,000# sd. + 3000# glass beads; IR
 27.3 BPM
 4-18-66 TD 4378', PBD 4340', COMPLETE,
 LOG TOP: San Andres 3456'.