

**District I**

1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**

811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**

1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form C-101

August 1, 2011

Permit 298731

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE**

1. Operator Name and Address MEWBOURNE OIL CO P.O. Box 5270 Hobbs, NM 88241		2. OGRID Number 14744
		3. API Number 30-025-49269
4. Property Code 331326	5. Property Name CABRA NINO 14 11 B2NC STATE COM	6. Well No. 001H

**7. Surface Location**

UL - Lot N	Section 14	Township 22S	Range 34E	Lot Idn N	Feet From 255	N/S Line S	Feet From 1330	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

**8. Proposed Bottom Hole Location**

UL - Lot C	Section 11	Township 22S	Range 34E	Lot Idn C	Feet From 100	N/S Line N	Feet From 2200	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

**9. Pool Information**

OJO CHISO;BONE SPRING	96553
-----------------------	-------

**Additional Well Information**

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3475
16. Multiple N	17. Proposed Depth 20592	18. Formation 2nd Bone Spring Sand	19. Contractor	20. Spud Date 8/26/2021
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

**21. Proposed Casing and Cement Program**

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	48	1496	1245	0
Surf	17.5	13.375	54.5	1780	1245	0
Int1	12.25	9.625	40	5800	1215	0
Int1	12.25	9.625	36	3453	1215	0
Int1	12.25	9.625	40	4393	1215	0
Int1	12.25	9.625	40	5282	1215	0
Prod	8.75	7	26	10701	635	5600
Liner1	6.125	4.5	13.5	20592	435	9818

**Casing/Cement Program: Additional Comments**

MOC proposed to drill & test the Bone Springs formation. H2S rule 118 does not apply because MOC has researched the area & no high concentrations were found. Will have on location & working all H2S safety equipment before Yates formation for safety & insurance purposes. Will stimulate as needed for production.

**22. Proposed Blowout Prevention Program**

Type	Working Pressure	Test Pressure	Manufacturer
Annular	2000	1500	Schaffer
Double Ram	3000	3000	Schaffer
Annular	3000	1500	Schaffer

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief.  
I further certify I have complied with 19.15.14.9 (A) NMAC ☒ and/or 19.15.14.9 (B) NMAC ☒ if applicable.

Signature:

**OIL CONSERVATION DIVISION**

Printed Name:	Electronically filed by Monty Whetstone	Approved By:	Paul F Kautz	
Title:	Vice President Operations	Title:	Geologist	
Email Address:	prodmgr@mewbourne.com	Approved Date:	7/30/2021	Expiration Date: 7/30/2023
Date:	7/28/2021	Phone:	903-561-2900	Conditions of Approval Attached

District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number	<sup>2</sup> Pool Code 96553	<sup>3</sup> Pool Name OJO CHISO; BONE SPRING
<sup>4</sup> Property Code	<sup>5</sup> Property Name CABRA NINO 14/11 B2NC STATE COM	<sup>6</sup> Well Number 1H
<sup>7</sup> OGRID NO. 14744	<sup>8</sup> Operator Name MEWBOURNE OIL COMPANY	<sup>9</sup> Elevation 3475'


<sup>10</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
N	14	22S	34E		255	SOUTH	1330	WEST	LEA

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	11	22S	34E		100	NORTH	2200	WEST	LEA
<sup>12</sup> Dedicated Acres 320	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.						

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

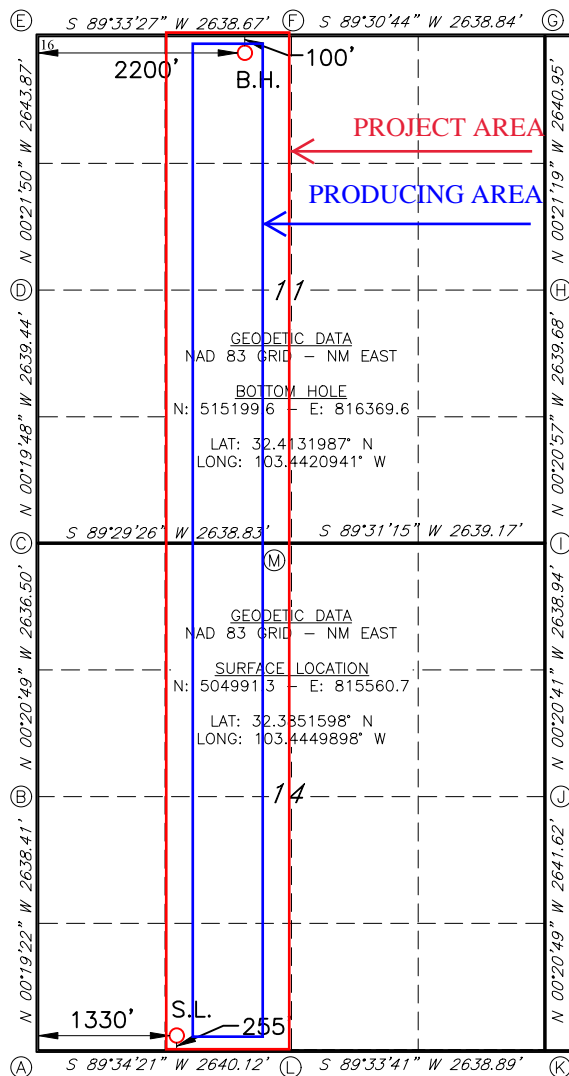

CORNER DATA  
NAD 83 GRID - NM EAST

A: FOUND BRASS CAP "1913"  
N: 504726.4 - E: 814232.2  
B: FOUND BRASS CAP "1913"  
N: 507364.3 - E: 814217.4  
C: FOUND BRASS CAP "1913"  
N: 510000.3 - E: 814201.4  
D: FOUND BRASS CAP "1913"  
N: 512639.2 - E: 814186.2  
E: FOUND BRASS CAP "1913"  
N: 515282.6 - E: 814169.4  
F: FOUND BRASS CAP "1913"  
N: 515303.0 - E: 816807.6  
G: FOUND BRASS CAP "1913"  
N: 515325.4 - E: 819445.8  
H: FOUND BRASS CAP "1913"  
N: 512685.0 - E: 819462.2  
I: FOUND BRASS CAP "1913"  
N: 510045.8 - E: 819478.3  
J: FOUND BRASS CAP "1913"  
N: 507407.4 - E: 819494.2  
K: FOUND BRASS CAP "1913"  
N: 504766.3 - E: 819510.2  
L: FOUND BRASS CAP "1913"  
N: 504746.1 - E: 816871.8  
M: FOUND BRASS CAP "1913"  
N: 510023.7 - E: 816839.7

<sup>17</sup> OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature Bradley Bishop Date 7-26-21  
BRADLEY BISHOP

Printed Name  
BBISHOP@MEWBOURNE.COM  
E-mail Address

<sup>18</sup> SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.


05-25-2021

Date of Survey

Signature and Seal of Professional Surveyor

19680

Certificate Number

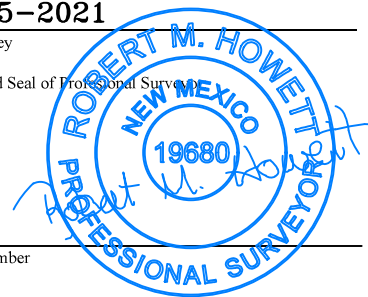

**District I**

1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**

811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**

1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form APD Conditions

Permit 298731

**PERMIT CONDITIONS OF APPROVAL**

Operator Name and Address: MEWBOURNE OIL CO [14744] P.O. Box 5270 Hobbs, NM 88241	API Number: 30-025-49269
	Well: CABRA NINO 14 11 B2NC STATE COM #001H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
pkautz	1) SURFACE & INTERMEDIATE CASING - Cement must circulate to surface -- 2) PRODUCTION CASING - Cement must tie back into intermediate casing -- 3) Liner - Cement must tie back into production casing
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water
pkautz	1)- The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud 2)- Drilling Sundries Form C-103 (Casing and Cement test are to be submitted within 10 days 3)- Completion Reports & Logs are to be submitted within 45 days 4)- Deviation / Directional Drill Survey are to be filed with or prior to C-104
pkautz	It is the operator's responsibility to monitor cancellation dates of approved APDs. APD's are good for 2 years and may be extended for one year. Only one 1 year extension will be granted if submitted by C-103 before expiration date. After expiration date or after a 1 year extension must submit new APD. If an APD expires and if site construction has occurred, site remediation is required.
pkautz	Stage Tool 1) Must notify OCD Hobbs Office prior to running Stage Tool 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.

Operator Name:	Property Name:	Well Number
----------------	----------------	-------------

## Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

## First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

## Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude				NAD

Is this well the defining well for the Horizontal Spacing Unit?

☐

Is this well an infill well?

☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

# **Mewbourne Oil Company**

**Lea County, New Mexico NAD 83**

**Cabra Nino 14/11 B2NC State Com #1H**

**Sec 14, T22S, R34E**

**SHL: 255' FSL & 1330' FWL**

**BHL: 100' FNL & 2200' FWL**

**Plan: Design #1**

## **Standard Planning Report**

**21 July, 2021**

## Planning Report

<b>Database:</b>	Hobbs	<b>Local Co-ordinate Reference:</b>	Site Cabra Nino 14/11 B2NC State Com #1H
<b>Company:</b>	Mewbourne Oil Company	<b>TVD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Project:</b>	Lea County, New Mexico NAD 83	<b>MD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Site:</b>	Cabra Nino 14/11 B2NC State Com #1H	<b>North Reference:</b>	Grid
<b>Well:</b>	Sec 14, T22S, R34E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	BHL: 100' FNL & 2200' FWL		
<b>Design:</b>	Design #1		

<b>Project</b>	Lea County, New Mexico NAD 83		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		

Site	Cabra Nino 14/11 B2NC State Com #1H				
Site Position:		Northing:	504,991.30 usft	Latitude:	32.3851598
From:	Map	Easting:	815,560.70 usft	Longitude:	-103.4449899
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	Sec 14, T22S, R34E					
Well Position	+N/-S	0.0 usft	Northing:	504,991.30 usft	Latitude:	32.3851598
	+E/-W	0.0 usft	Easting:	815,560.70 usft	Longitude:	-103.4449899
Position Uncertainty		0.0 usft	Wellhead Elevation:	3,503.0 usft	Ground Level:	3,475.0 usft
Grid Convergence:		0.48 °				

<b>Wellbore</b>	BHL: 100' FNL & 2200' FWL				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010	12/31/2014	7.10	60.27	48,371.76029437

<b>Design</b>	Design #1				
<b>Audit Notes:</b>					
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0	
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>	
	0.0	0.0	0.0	4.53	

<b>Plan Survey Tool Program</b>	<b>Date</b>	7/21/2021			
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>	
1	0.0	20,591.7	Design #1 (BHL: 100' FNL & 2200		

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,780.0	0.00	0.00	1,780.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,116.8	6.74	105.29	2,116.1	-5.2	19.1	2.00	2.00	0.00	105.29	
9,480.6	6.74	105.29	9,429.0	-233.1	852.3	0.00	0.00	0.00	0.00	
9,817.4	0.00	0.00	9,765.0	-238.3	871.4	2.00	-2.00	0.00	180.00	KOP: 10' FSL & 2200'
10,723.1	90.56	359.66	10,338.0	340.3	867.9	10.00	10.00	0.00	-0.34	
20,591.7	90.56	359.66	10,241.0	10,208.3	808.9	0.00	0.00	0.00	0.00	BHL: 100' FNL & 2200'

## Planning Report

<b>Database:</b>	Hobbs	<b>Local Co-ordinate Reference:</b>	Site Cabra Nino 14/11 B2NC State Com #1H
<b>Company:</b>	Mewbourne Oil Company	<b>TVD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Project:</b>	Lea County, New Mexico NAD 83	<b>MD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Site:</b>	Cabra Nino 14/11 B2NC State Com #1H	<b>North Reference:</b>	Grid
<b>Well:</b>	Sec 14, T22S, R34E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	BHL: 100' FNL & 2200' FWL		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 255' FSL & 1330' FWL									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,780.0	0.00	0.00	1,780.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.40	105.29	1,800.0	0.0	0.1	0.0	2.00	2.00	0.00
1,900.0	2.40	105.29	1,900.0	-0.7	2.4	-0.5	2.00	2.00	0.00
2,000.0	4.40	105.29	1,999.8	-2.2	8.1	-1.6	2.00	2.00	0.00
2,100.0	6.40	105.29	2,099.3	-4.7	17.2	-3.3	2.00	2.00	0.00
2,116.8	6.74	105.29	2,116.1	-5.2	19.1	-3.7	2.00	2.00	0.00
2,200.0	6.74	105.29	2,198.7	-7.8	28.5	-5.5	0.00	0.00	0.00
2,300.0	6.74	105.29	2,298.0	-10.9	39.8	-7.7	0.00	0.00	0.00
2,400.0	6.74	105.29	2,397.3	-14.0	51.1	-9.9	0.00	0.00	0.00
2,500.0	6.74	105.29	2,496.6	-17.1	62.4	-12.1	0.00	0.00	0.00
2,600.0	6.74	105.29	2,595.9	-20.2	73.7	-14.3	0.00	0.00	0.00
2,700.0	6.74	105.29	2,695.2	-23.3	85.1	-16.5	0.00	0.00	0.00
2,800.0	6.74	105.29	2,794.5	-26.4	96.4	-18.7	0.00	0.00	0.00
2,900.0	6.74	105.29	2,893.8	-29.4	107.7	-20.8	0.00	0.00	0.00
3,000.0	6.74	105.29	2,993.1	-32.5	119.0	-23.0	0.00	0.00	0.00
3,100.0	6.74	105.29	3,092.4	-35.6	130.3	-25.2	0.00	0.00	0.00
3,200.0	6.74	105.29	3,191.7	-38.7	141.6	-27.4	0.00	0.00	0.00
3,300.0	6.74	105.29	3,291.1	-41.8	153.0	-29.6	0.00	0.00	0.00
3,400.0	6.74	105.29	3,390.4	-44.9	164.3	-31.8	0.00	0.00	0.00
3,500.0	6.74	105.29	3,489.7	-48.0	175.6	-34.0	0.00	0.00	0.00
3,600.0	6.74	105.29	3,589.0	-51.1	186.9	-36.2	0.00	0.00	0.00
3,700.0	6.74	105.29	3,688.3	-54.2	198.2	-38.4	0.00	0.00	0.00
3,800.0	6.74	105.29	3,787.6	-57.3	209.5	-40.6	0.00	0.00	0.00
3,900.0	6.74	105.29	3,886.9	-60.4	220.8	-42.8	0.00	0.00	0.00
4,000.0	6.74	105.29	3,986.2	-63.5	232.2	-44.9	0.00	0.00	0.00
4,100.0	6.74	105.29	4,085.5	-66.6	243.5	-47.1	0.00	0.00	0.00
4,200.0	6.74	105.29	4,184.8	-69.7	254.8	-49.3	0.00	0.00	0.00
4,300.0	6.74	105.29	4,284.2	-72.8	266.1	-51.5	0.00	0.00	0.00
4,400.0	6.74	105.29	4,383.5	-75.9	277.4	-53.7	0.00	0.00	0.00
4,500.0	6.74	105.29	4,482.8	-79.0	288.7	-55.9	0.00	0.00	0.00
4,600.0	6.74	105.29	4,582.1	-82.0	300.1	-58.1	0.00	0.00	0.00
4,700.0	6.74	105.29	4,681.4	-85.1	311.4	-60.3	0.00	0.00	0.00
4,800.0	6.74	105.29	4,780.7	-88.2	322.7	-62.5	0.00	0.00	0.00
4,900.0	6.74	105.29	4,880.0	-91.3	334.0	-64.7	0.00	0.00	0.00
5,000.0	6.74	105.29	4,979.3	-94.4	345.3	-66.9	0.00	0.00	0.00

## Planning Report

<b>Database:</b>	Hobbs	<b>Local Co-ordinate Reference:</b>	Site Cabra Nino 14/11 B2NC State Com #1H
<b>Company:</b>	Mewbourne Oil Company	<b>TVD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Project:</b>	Lea County, New Mexico NAD 83	<b>MD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Site:</b>	Cabra Nino 14/11 B2NC State Com #1H	<b>North Reference:</b>	Grid
<b>Well:</b>	Sec 14, T22S, R34E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	BHL: 100' FNL & 2200' FWL		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,100.0	6.74	105.29	5,078.6	-97.5	356.6	-69.0	0.00	0.00	0.00
5,200.0	6.74	105.29	5,177.9	-100.6	367.9	-71.2	0.00	0.00	0.00
5,300.0	6.74	105.29	5,277.2	-103.7	379.3	-73.4	0.00	0.00	0.00
5,400.0	6.74	105.29	5,376.6	-106.8	390.6	-75.6	0.00	0.00	0.00
5,500.0	6.74	105.29	5,475.9	-109.9	401.9	-77.8	0.00	0.00	0.00
5,600.0	6.74	105.29	5,575.2	-113.0	413.2	-80.0	0.00	0.00	0.00
5,700.0	6.74	105.29	5,674.5	-116.1	424.5	-82.2	0.00	0.00	0.00
5,800.0	6.74	105.29	5,773.8	-119.2	435.8	-84.4	0.00	0.00	0.00
5,900.0	6.74	105.29	5,873.1	-122.3	447.2	-86.6	0.00	0.00	0.00
6,000.0	6.74	105.29	5,972.4	-125.4	458.5	-88.8	0.00	0.00	0.00
6,100.0	6.74	105.29	6,071.7	-128.5	469.8	-90.9	0.00	0.00	0.00
6,200.0	6.74	105.29	6,171.0	-131.6	481.1	-93.1	0.00	0.00	0.00
6,300.0	6.74	105.29	6,270.3	-134.6	492.4	-95.3	0.00	0.00	0.00
6,400.0	6.74	105.29	6,369.7	-137.7	503.7	-97.5	0.00	0.00	0.00
6,500.0	6.74	105.29	6,469.0	-140.8	515.0	-99.7	0.00	0.00	0.00
6,600.0	6.74	105.29	6,568.3	-143.9	526.4	-101.9	0.00	0.00	0.00
6,700.0	6.74	105.29	6,667.6	-147.0	537.7	-104.1	0.00	0.00	0.00
6,800.0	6.74	105.29	6,766.9	-150.1	549.0	-106.3	0.00	0.00	0.00
6,900.0	6.74	105.29	6,866.2	-153.2	560.3	-108.5	0.00	0.00	0.00
7,000.0	6.74	105.29	6,965.5	-156.3	571.6	-110.7	0.00	0.00	0.00
7,100.0	6.74	105.29	7,064.8	-159.4	582.9	-112.9	0.00	0.00	0.00
7,200.0	6.74	105.29	7,164.1	-162.5	594.2	-115.0	0.00	0.00	0.00
7,300.0	6.74	105.29	7,263.4	-165.6	605.6	-117.2	0.00	0.00	0.00
7,400.0	6.74	105.29	7,362.7	-168.7	616.9	-119.4	0.00	0.00	0.00
7,500.0	6.74	105.29	7,462.1	-171.8	628.2	-121.6	0.00	0.00	0.00
7,600.0	6.74	105.29	7,561.4	-174.9	639.5	-123.8	0.00	0.00	0.00
7,700.0	6.74	105.29	7,660.7	-178.0	650.8	-126.0	0.00	0.00	0.00
7,800.0	6.74	105.29	7,760.0	-181.1	662.1	-128.2	0.00	0.00	0.00
7,900.0	6.74	105.29	7,859.3	-184.1	673.5	-130.4	0.00	0.00	0.00
8,000.0	6.74	105.29	7,958.6	-187.2	684.8	-132.6	0.00	0.00	0.00
8,100.0	6.74	105.29	8,057.9	-190.3	696.1	-134.8	0.00	0.00	0.00
8,200.0	6.74	105.29	8,157.2	-193.4	707.4	-136.9	0.00	0.00	0.00
8,300.0	6.74	105.29	8,256.5	-196.5	718.7	-139.1	0.00	0.00	0.00
8,400.0	6.74	105.29	8,355.8	-199.6	730.0	-141.3	0.00	0.00	0.00
8,500.0	6.74	105.29	8,455.2	-202.7	741.3	-143.5	0.00	0.00	0.00
8,600.0	6.74	105.29	8,554.5	-205.8	752.7	-145.7	0.00	0.00	0.00
8,700.0	6.74	105.29	8,653.8	-208.9	764.0	-147.9	0.00	0.00	0.00
8,800.0	6.74	105.29	8,753.1	-212.0	775.3	-150.1	0.00	0.00	0.00
8,900.0	6.74	105.29	8,852.4	-215.1	786.6	-152.3	0.00	0.00	0.00
9,000.0	6.74	105.29	8,951.7	-218.2	797.9	-154.5	0.00	0.00	0.00
9,100.0	6.74	105.29	9,051.0	-221.3	809.2	-156.7	0.00	0.00	0.00
9,200.0	6.74	105.29	9,150.3	-224.4	820.6	-158.9	0.00	0.00	0.00
9,300.0	6.74	105.29	9,249.6	-227.5	831.9	-161.0	0.00	0.00	0.00
9,400.0	6.74	105.29	9,348.9	-230.6	843.2	-163.2	0.00	0.00	0.00
9,480.6	6.74	105.29	9,429.0	-233.1	852.3	-165.0	0.00	0.00	0.00
9,500.0	6.35	105.29	9,448.3	-233.6	854.4	-165.4	2.00	-2.00	0.00
9,600.0	4.35	105.29	9,547.8	-236.1	863.4	-167.2	2.00	-2.00	0.00
9,700.0	2.35	105.29	9,647.6	-237.6	869.1	-168.2	2.00	-2.00	0.00
9,800.0	0.35	105.29	9,747.6	-238.3	871.3	-168.7	2.00	-2.00	0.00
9,817.4	0.00	0.00	9,765.0	-238.3	871.4	-168.7	2.00	-2.00	0.00
<b>KOP: 10' FSL &amp; 2200' FWL</b>									
9,850.0	3.26	359.66	9,797.6	-237.3	871.4	-167.8	10.00	10.00	0.00
9,900.0	8.26	359.66	9,847.3	-232.3	871.3	-162.8	10.00	10.00	0.00



## Planning Report

<b>Database:</b>	Hobbs	<b>Local Co-ordinate Reference:</b>	Site Cabra Nino 14/11 B2NC State Com #1H
<b>Company:</b>	Mewbourne Oil Company	<b>TVD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Project:</b>	Lea County, New Mexico NAD 83	<b>MD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Site:</b>	Cabra Nino 14/11 B2NC State Com #1H	<b>North Reference:</b>	Grid
<b>Well:</b>	Sec 14, T22S, R34E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	BHL: 100' FNL & 2200' FWL		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,950.0	13.26	359.66	9,896.4	-223.0	871.3	-153.5	10.00	10.00	0.00
10,000.0	18.26	359.66	9,944.5	-209.4	871.2	-140.0	10.00	10.00	0.00
10,050.0	23.26	359.66	9,991.3	-191.7	871.1	-122.3	10.00	10.00	0.00
10,100.0	28.26	359.66	10,036.3	-170.0	871.0	-100.7	10.00	10.00	0.00
10,130.2	31.28	359.66	10,062.5	-155.0	870.9	-85.7	10.00	10.00	0.00
FTP: 100' FSL & 2200' FWL									
10,150.0	33.26	359.66	10,079.2	-144.4	870.8	-75.2	10.00	10.00	0.00
10,200.0	38.25	359.66	10,119.8	-115.2	870.6	-46.1	10.00	10.00	0.00
10,250.0	43.25	359.66	10,157.7	-82.6	870.5	-13.6	10.00	10.00	0.00
10,300.0	48.25	359.66	10,192.6	-46.8	870.2	22.1	10.00	10.00	0.00
10,350.0	53.25	359.66	10,224.2	-8.1	870.0	60.7	10.00	10.00	0.00
10,400.0	58.25	359.66	10,252.3	33.2	869.8	101.8	10.00	10.00	0.00
10,450.0	63.25	359.66	10,276.7	76.8	869.5	145.3	10.00	10.00	0.00
10,500.0	68.25	359.66	10,297.2	122.4	869.2	190.7	10.00	10.00	0.00
10,550.0	73.25	359.66	10,313.7	169.6	868.9	237.7	10.00	10.00	0.00
10,600.0	78.25	359.66	10,326.0	218.1	868.7	286.0	10.00	10.00	0.00
10,650.0	83.25	359.66	10,334.1	267.4	868.4	335.1	10.00	10.00	0.00
10,700.0	88.25	359.66	10,337.8	317.2	868.1	384.8	10.00	10.00	0.00
10,700.8	88.33	359.66	10,337.8	318.0	868.1	385.6	10.00	10.00	0.00
LP: 583' FSL & 2200' FWL									
10,723.1	90.56	359.66	10,338.0	340.3	867.9	407.8	10.00	10.00	0.00
10,800.0	90.56	359.66	10,337.2	417.2	867.5	484.4	0.00	0.00	0.00
10,900.0	90.56	359.66	10,336.3	517.2	866.9	584.1	0.00	0.00	0.00
11,000.0	90.56	359.66	10,335.3	617.2	866.3	683.7	0.00	0.00	0.00
11,100.0	90.56	359.66	10,334.3	717.2	865.7	783.3	0.00	0.00	0.00
11,200.0	90.56	359.66	10,333.3	817.2	865.1	883.0	0.00	0.00	0.00
11,300.0	90.56	359.66	10,332.3	917.2	864.5	982.6	0.00	0.00	0.00
11,400.0	90.56	359.66	10,331.3	1,017.2	863.9	1,082.2	0.00	0.00	0.00
11,500.0	90.56	359.66	10,330.4	1,117.2	863.3	1,181.9	0.00	0.00	0.00
11,600.0	90.56	359.66	10,329.4	1,217.2	862.7	1,281.5	0.00	0.00	0.00
11,700.0	90.56	359.66	10,328.4	1,317.2	862.1	1,381.1	0.00	0.00	0.00
11,800.0	90.56	359.66	10,327.4	1,417.2	861.5	1,480.8	0.00	0.00	0.00
11,900.0	90.56	359.66	10,326.4	1,517.2	860.9	1,580.4	0.00	0.00	0.00
12,000.0	90.56	359.66	10,325.4	1,617.1	860.3	1,680.0	0.00	0.00	0.00
12,100.0	90.56	359.66	10,324.5	1,717.1	859.7	1,779.7	0.00	0.00	0.00
12,200.0	90.56	359.66	10,323.5	1,817.1	859.1	1,879.3	0.00	0.00	0.00
12,300.0	90.56	359.66	10,322.5	1,917.1	858.5	1,978.9	0.00	0.00	0.00
12,400.0	90.56	359.66	10,321.5	2,017.1	857.9	2,078.6	0.00	0.00	0.00
12,500.0	90.56	359.66	10,320.5	2,117.1	857.3	2,178.2	0.00	0.00	0.00
12,600.0	90.56	359.66	10,319.6	2,217.1	856.7	2,277.8	0.00	0.00	0.00
12,700.0	90.56	359.66	10,318.6	2,317.1	856.1	2,377.5	0.00	0.00	0.00
12,800.0	90.56	359.66	10,317.6	2,417.1	855.5	2,477.1	0.00	0.00	0.00
12,900.0	90.56	359.66	10,316.6	2,517.1	854.9	2,576.8	0.00	0.00	0.00
13,000.0	90.56	359.66	10,315.6	2,617.1	854.3	2,676.4	0.00	0.00	0.00
13,100.0	90.56	359.66	10,314.6	2,717.1	853.7	2,776.0	0.00	0.00	0.00
13,200.0	90.56	359.66	10,313.7	2,817.1	853.1	2,875.7	0.00	0.00	0.00
13,300.0	90.56	359.66	10,312.7	2,917.1	852.5	2,975.3	0.00	0.00	0.00
13,400.0	90.56	359.66	10,311.7	3,017.1	851.9	3,074.9	0.00	0.00	0.00
13,500.0	90.56	359.66	10,310.7	3,117.0	851.3	3,174.6	0.00	0.00	0.00
13,600.0	90.56	359.66	10,309.7	3,217.0	850.7	3,274.2	0.00	0.00	0.00
13,700.0	90.56	359.66	10,308.7	3,317.0	850.1	3,373.8	0.00	0.00	0.00
13,800.0	90.56	359.66	10,307.8	3,417.0	849.5	3,473.5	0.00	0.00	0.00
13,900.0	90.56	359.66	10,306.8	3,517.0	848.9	3,573.1	0.00	0.00	0.00
14,000.0	90.56	359.66	10,305.8	3,617.0	848.3	3,672.7	0.00	0.00	0.00

## Planning Report

<b>Database:</b>	Hobbs	<b>Local Co-ordinate Reference:</b>	Site Cabra Nino 14/11 B2NC State Com #1H
<b>Company:</b>	Mewbourne Oil Company	<b>TVD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Project:</b>	Lea County, New Mexico NAD 83	<b>MD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Site:</b>	Cabra Nino 14/11 B2NC State Com #1H	<b>North Reference:</b>	Grid
<b>Well:</b>	Sec 14, T22S, R34E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	BHL: 100' FNL & 2200' FWL		
<b>Design:</b>	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,100.0	90.56	359.66	10,304.8	3,717.0	847.7	3,772.4	0.00	0.00	0.00
14,200.0	90.56	359.66	10,303.8	3,817.0	847.1	3,872.0	0.00	0.00	0.00
14,300.0	90.56	359.66	10,302.8	3,917.0	846.5	3,971.6	0.00	0.00	0.00
14,400.0	90.56	359.66	10,301.9	4,017.0	845.9	4,071.3	0.00	0.00	0.00
14,500.0	90.56	359.66	10,300.9	4,117.0	845.3	4,170.9	0.00	0.00	0.00
14,600.0	90.56	359.66	10,299.9	4,217.0	844.7	4,270.5	0.00	0.00	0.00
14,700.0	90.56	359.66	10,298.9	4,317.0	844.1	4,370.2	0.00	0.00	0.00
14,800.0	90.56	359.66	10,297.9	4,417.0	843.5	4,469.8	0.00	0.00	0.00
14,900.0	90.56	359.66	10,296.9	4,517.0	842.9	4,569.4	0.00	0.00	0.00
15,000.0	90.56	359.66	10,296.0	4,616.9	842.3	4,669.1	0.00	0.00	0.00
15,100.0	90.56	359.66	10,295.0	4,716.9	841.7	4,768.7	0.00	0.00	0.00
15,200.0	90.56	359.66	10,294.0	4,816.9	841.1	4,868.3	0.00	0.00	0.00
15,300.0	90.56	359.66	10,293.0	4,916.9	840.5	4,968.0	0.00	0.00	0.00
15,400.0	90.56	359.66	10,292.0	5,016.9	840.0	5,067.6	0.00	0.00	0.00
15,500.0	90.56	359.66	10,291.0	5,116.9	839.4	5,167.2	0.00	0.00	0.00
15,600.0	90.56	359.66	10,290.1	5,216.9	838.8	5,266.9	0.00	0.00	0.00
15,700.0	90.56	359.66	10,289.1	5,316.9	838.2	5,366.5	0.00	0.00	0.00
15,800.0	90.56	359.66	10,288.1	5,416.9	837.6	5,466.1	0.00	0.00	0.00
15,900.0	90.56	359.66	10,287.1	5,516.9	837.0	5,565.8	0.00	0.00	0.00
16,000.0	90.56	359.66	10,286.1	5,616.9	836.4	5,665.4	0.00	0.00	0.00
16,100.0	90.56	359.66	10,285.1	5,716.9	835.8	5,765.0	0.00	0.00	0.00
16,200.0	90.56	359.66	10,284.2	5,816.9	835.2	5,864.7	0.00	0.00	0.00
16,300.0	90.56	359.66	10,283.2	5,916.9	834.6	5,964.3	0.00	0.00	0.00
16,400.0	90.56	359.66	10,282.2	6,016.9	834.0	6,063.9	0.00	0.00	0.00
16,500.0	90.56	359.66	10,281.2	6,116.8	833.4	6,163.6	0.00	0.00	0.00
16,600.0	90.56	359.66	10,280.2	6,216.8	832.8	6,263.2	0.00	0.00	0.00
16,700.0	90.56	359.66	10,279.3	6,316.8	832.2	6,362.8	0.00	0.00	0.00
16,800.0	90.56	359.66	10,278.3	6,416.8	831.6	6,462.5	0.00	0.00	0.00
16,900.0	90.56	359.66	10,277.3	6,516.8	831.0	6,562.1	0.00	0.00	0.00
17,000.0	90.56	359.66	10,276.3	6,616.8	830.4	6,661.7	0.00	0.00	0.00
17,100.0	90.56	359.66	10,275.3	6,716.8	829.8	6,761.4	0.00	0.00	0.00
17,200.0	90.56	359.66	10,274.3	6,816.8	829.2	6,861.0	0.00	0.00	0.00
17,300.0	90.56	359.66	10,273.4	6,916.8	828.6	6,960.6	0.00	0.00	0.00
17,400.0	90.56	359.66	10,272.4	7,016.8	828.0	7,060.3	0.00	0.00	0.00
17,500.0	90.56	359.66	10,271.4	7,116.8	827.4	7,159.9	0.00	0.00	0.00
17,600.0	90.56	359.66	10,270.4	7,216.8	826.8	7,259.5	0.00	0.00	0.00
17,700.0	90.56	359.66	10,269.4	7,316.8	826.2	7,359.2	0.00	0.00	0.00
17,800.0	90.56	359.66	10,268.4	7,416.8	825.6	7,458.8	0.00	0.00	0.00
17,900.0	90.56	359.66	10,267.5	7,516.8	825.0	7,558.4	0.00	0.00	0.00
18,000.0	90.56	359.66	10,266.5	7,616.7	824.4	7,658.1	0.00	0.00	0.00
18,100.0	90.56	359.66	10,265.5	7,716.7	823.8	7,757.7	0.00	0.00	0.00
18,200.0	90.56	359.66	10,264.5	7,816.7	823.2	7,857.3	0.00	0.00	0.00
18,300.0	90.56	359.66	10,263.5	7,916.7	822.6	7,957.0	0.00	0.00	0.00
18,400.0	90.56	359.66	10,262.5	8,016.7	822.0	8,056.6	0.00	0.00	0.00
18,500.0	90.56	359.66	10,261.6	8,116.7	821.4	8,156.2	0.00	0.00	0.00
18,600.0	90.56	359.66	10,260.6	8,216.7	820.8	8,255.9	0.00	0.00	0.00
18,700.0	90.56	359.66	10,259.6	8,316.7	820.2	8,355.5	0.00	0.00	0.00
18,800.0	90.56	359.66	10,258.6	8,416.7	819.6	8,455.1	0.00	0.00	0.00
18,900.0	90.56	359.66	10,257.6	8,516.7	819.0	8,554.8	0.00	0.00	0.00
19,000.0	90.56	359.66	10,256.6	8,616.7	818.4	8,654.4	0.00	0.00	0.00
19,100.0	90.56	359.66	10,255.7	8,716.7	817.8	8,754.0	0.00	0.00	0.00
19,200.0	90.56	359.66	10,254.7	8,816.7	817.2	8,853.7	0.00	0.00	0.00
19,300.0	90.56	359.66	10,253.7	8,916.7	816.6	8,953.3	0.00	0.00	0.00
19,400.0	90.56	359.66	10,252.7	9,016.7	816.0	9,052.9	0.00	0.00	0.00

## Planning Report

<b>Database:</b>	Hobbs	<b>Local Co-ordinate Reference:</b>	Site Cabra Nino 14/11 B2NC State Com #1H
<b>Company:</b>	Mewbourne Oil Company	<b>TVD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Project:</b>	Lea County, New Mexico NAD 83	<b>MD Reference:</b>	WELL @ 3503.0usft (Original Well Elev)
<b>Site:</b>	Cabra Nino 14/11 B2NC State Com #1H	<b>North Reference:</b>	Grid
<b>Well:</b>	Sec 14, T22S, R34E	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	BHL: 100' FNL & 2200' FWL		
<b>Design:</b>	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
19,500.0	90.56	359.66	10,251.7	9,116.6	815.4	9,152.6	0.00	0.00	0.00	
19,600.0	90.56	359.66	10,250.7	9,216.6	814.8	9,252.2	0.00	0.00	0.00	
19,700.0	90.56	359.66	10,249.8	9,316.6	814.2	9,351.8	0.00	0.00	0.00	
19,800.0	90.56	359.66	10,248.8	9,416.6	813.6	9,451.5	0.00	0.00	0.00	
19,900.0	90.56	359.66	10,247.8	9,516.6	813.0	9,551.1	0.00	0.00	0.00	
20,000.0	90.56	359.66	10,246.8	9,616.6	812.4	9,650.7	0.00	0.00	0.00	
20,100.0	90.56	359.66	10,245.8	9,716.6	811.8	9,750.4	0.00	0.00	0.00	
20,200.0	90.56	359.66	10,244.9	9,816.6	811.2	9,850.0	0.00	0.00	0.00	
20,300.0	90.56	359.66	10,243.9	9,916.6	810.6	9,949.6	0.00	0.00	0.00	
20,400.0	90.56	359.66	10,242.9	10,016.6	810.0	10,049.3	0.00	0.00	0.00	
20,500.0	90.56	359.66	10,241.9	10,116.6	809.4	10,148.9	0.00	0.00	0.00	
20,591.7	90.56	359.66	10,241.0	10,208.3	808.9	10,240.3	0.00	0.00	0.00	
BHL: 100' FNL & 2200' FWL										

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SHL: 255' FSL & 1330' F - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	504,991.30	815,560.70	32.3851598	-103.4449899	
KOP: 10' FSL & 2200' F - plan hits target center - Point	0.00	0.00	9,765.0	-238.3	871.4	504,753.03	816,432.08	32.3844850	-103.4421738	
FTP: 100' FSL & 2200' F - plan hits target center - Point	0.00	0.00	10,062.5	-155.0	870.9	504,836.30	816,431.58	32.3847139	-103.4421732	
BHL: 100' FNL & 2200' F - plan hits target center - Point	0.00	0.00	10,241.0	10,208.3	808.9	515,199.60	816,369.60	32.4131988	-103.4420942	
LP: 583' FSL & 2200' FV - plan hits target center - Point	0.00	0.00	10,337.8	318.0	868.1	505,309.30	816,428.75	32.3860140	-103.4421696	

Page 5

State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description Effective May 25, 2021

**I. Operator:** Mewbourne Oil Co. **OGRID:** 14744 **Date:** 7/20/21

**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Cabra Nino 14/11 B2NC State Com #1H		N 14 22S 34E	255' FSL x 1330' FWL	1200	4100	3600

**IV. Central Delivery Point Name:** Cabra Nino 14/11 B2NC State Com #1H [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Cabra Nino 14/11 B2NC State Com #1H		9/20/21	10/20/21	11/20/21	11/5/21	11/5/21

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

**Section 2 – Enhanced Plan**  
**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☐ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

**IX. Anticipated Natural Gas Production:**

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

**X. Natural Gas Gathering System (NGGS):**

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

**XI. Map.** ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII. Line Pressure.** Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:** ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

### **Section 3 - Certifications**

**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

### **Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	<i>Bradley Bishop</i>
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	7/20/21
Phone:	575-393-5905
<b>OIL CONSERVATION DIVISION</b> <b>(Only applicable when submitted as a standalone form)</b>	
Approved By:	
Title:	
Approval Date:	
Conditions of Approval:	



## Mewbourne Oil Company

## Natural Gas Management Plan – Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8 :
- A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
  - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
  - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
  - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
  - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
  - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure



the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

- VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.

Well Name                      Cabra Nino 14-11 B2NC State Com #1H

Csg Type	Fluid Type	Hole Size	Csg Size	Csg Grade	Csg Weight	Top MD	Setting Depth	SKS Cmt
Surf	Spud Mud	17 1/2"	13 3/8"	H40	48	0	1496	1245
Surf	Spud Mud	17 1/2"	13 3/8"	J55	54.5	1496	1780	
Inter	Brine	12 1/4"	9 5/8"	J55	36	0	3453	1215
Inter	Brine	12 1/4"	9 5/8"	J55	40	3453	4393	
Inter	Brine	12 1/4"	9 5/8"	N80	40	4393	5282	
Inter	Brine	12 1/4"	9 5/8"	HCL80	40	5282	5800	
Prod	Cut Brine	8 3/4"	7"	HCP110	26	0	10701	635
Liner	OBM	6 1/8"	4 1/2"	P110	13.5	9818	20592	435

Top Cmt
0
0
5600
9818