

Well Name: CARSON UNIT 11	Well Location: T25N / R12W / SEC 11 / SWNE / 36.418046 / 108.078087	County or Parish/State: SAN JUAN / NM
Well Number: 332R	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMSF078067	Unit or CA Name:	Unit or CA Number:
US Well Number: 300453101900S1	Well Status: Gas Well Shut In	Operator: DJR OPERATING LLC

Subsequent Report

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 04/28/2021

Time Sundry Submitted: 09:39

Date Operation Actually Began: 04/19/2021

Actual Procedure: The subject well was Plugged & Abandoned on 04/19/2021 per the attached detailed As Plugged Wellbore Diagram and Marker.

SR Attachments

Actual Procedure

Carson_Unit_11_332R_PXA_Marker_20210428093859.pdf

Carson_11_332R_EOWR___AsPlugged_WBD_20210428093859.pdf

Well Name: CARSON UNIT 11

Well Location: T25N / R12W / SEC 11 / SWNE / 36.418046 / 108.078087

County or Parish/State: SAN JUAN / NM

Well Number: 332R

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMSF078067

Unit or CA Name:

Unit or CA Number:

US Well Number: 300453101900S1

Well Status: Gas Well Shut In

Operator: DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: DACYE SHULL

Signed on: APR 28, 2021 09:39 AM

Name: DJR OPERATING LLC

Title: Regulatory Technician

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Phone: (505) 632-3476

Email address: DSHULL@DJRLLC.COM

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: WILLIAM F TAMBEKOU

BLM POC Title: PETROLEUM ENGINEER

BLM POC Phone: 7192698500

BLM POC Email Address: wtambekou@blm.gov

Disposition: Accepted

Disposition Date: 05/04/2021

Signature: William Max Tambekou

DJR Operating, LLC
Carson Unit 11 332R
API # 30-045-31019
SW/NE, Unit G, Sec. 11, T25N, R12W
San Juan County, NM



P&A End of Well Report
DJR Operating, LLC
Carson Unit 11 #332R
API: 30-045-31019
SWNE G-11-25N-12W
San Juan County, NM

Spud Date: 03/02/2004

Plugged Date: 04/19/2021

04/15/21: Set CR at 1040'. PT casing, did not test. Plug 1: Fruitland perms: Mix and pump 12 sx class G cement through CR. Plug 2: From top of CR at 1040', mix and place 35 sx class G + 2% CaCl₂ on CR. Ran out of cement, TOOH. Tagged plug at 550'. Plug 3: From top of plug 2 at 550', mix and place 45 sx class G + 2% CaCl₂. Topped cement to surface.

04/19/21: Tag TOC inside casing at surface. Cut off WH, TOC in annulus was 16'. Install P&A marker. Mix and pump 24 sx class G to top off cellar.

All cement used: Class G cement mixed at 15.8 ppg, 1.15 yield.
BLM Representative onsite to witness: Dustin Porch

**DJR Operating, LLC
P&A End of Well Report**

Carson 11 332R

API # 30-045-31019

SWNE Unit G Sec 11, 25N, R12W
San Juan County, NM

GL 6355'

KB

Spud Date 3/2/2004

SURF CSG

Hole size 8.75"
Csg Size: 7"
Wt: 23#
Grade: J-55
ID: 6.366"
Depth 133'
casing cap ft³/ft: 0.221
TOC: Circ to surf

FORMATION TOPS


Nacimiento	surface
Ojo Alamo	300'
Kirtland	418'
Fruitland	998'
Pictured Cliffs	1196'

PROD CSG

Hole size 6.25"
Csg Size: 4.5"
Wt: 11.6#
Grade: J-55
ID: 4.000"
Depth 1429'
casing cap ft³/ft: 0.0872
Csg/Csg cap ft³/ft 0.1106
TOC: Circ to surf

Fruitland Coal perms
1094-1192'

PBTD 1391'
TD 1450'

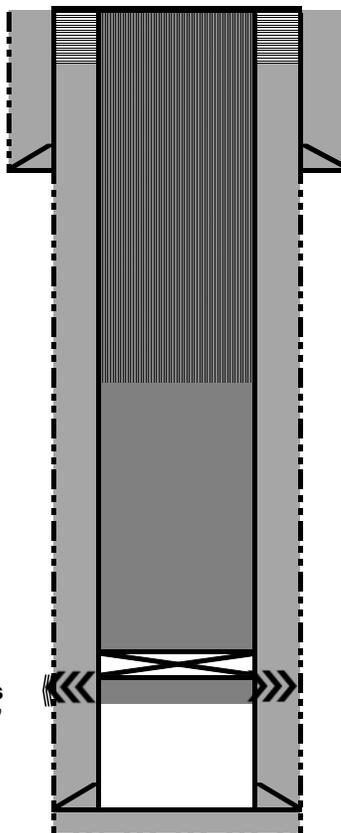

4-19-2021: Tag TOC inside casing at surface. Cut off WH, TOC in annulus was 16'. Install P&A marker. Mix and pump 24 sx class G to top off cellar

4-15-2021: Plug 3: From top of plug 2 at 550', mix and place 45 sx class G + 2% CaCl₂. Topped cement to surface.

4-15-2021: Plug 2: From top of CR at 1040', mix and place 35 sx class G + 2% CaCl₂ on CR, Ran out of cement, TOOH. Tagged plug at 550'

4-15-2021: Plug 1: Fruitland perms: Mix and pump 12 sx class G cement through CR.

4-15-2021: Set CR at 1040'. PT casing, did not test.

All cement used was class G mixed at 15.8 ppg, yield 1.15
Regulatory representative, Dustin Porch, BLM
GPS Coordinates: Lat: 36.418055752292275, Lng: -108.07798834517598

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 56494

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 56494
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/3/2021