

<b>Well Name:</b> BUENA SUERTE 33 L COM	<b>Well Location:</b> T26N / R11W / SEC 33 / NWSW / 36.44211 / 108.01511	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 1	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b> EASTERN NAVAJO
<b>Lease Number:</b> N00C14203621	<b>Unit or CA Name:</b> BUENA SUERTE 33L COM	<b>Unit or CA Number:</b> NMNM89332
<b>US Well Number:</b> 3004528879	<b>Well Status:</b> Abandoned	<b>Operator:</b> DJR OPERATING LLC

Subsequent Report

<b>Type of Submission:</b> Subsequent Report	<b>Type of Action:</b> Plug and Abandonment
<b>Date Sundry Submitted:</b> 02/10/2021	<b>Time Sundry Submitted:</b> 09:02
<b>Date Operation Actually Began:</b> 11/19/2020	

**Actual Procedure:** The subject well was Plugged & Abandoned on 11/19/20 per the attached detailed Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

- Buena\_Suerte\_33L\_COM\_1\_PA\_marker\_20210210090149.pdf
- EOWR\_AsPlugged\_WBD\_Buena\_Suerte\_33L\_Com\_1\_20210210090149.pdf

<b>Well Name:</b> BUENA SUERTE 33 L COM	<b>Well Location:</b> T26N / R11W / SEC 33 / NWSW / 36.44211 / 108.01511	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 1	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b> EASTERN NAVAJO
<b>Lease Number:</b> N00C14203621	<b>Unit or CA Name:</b> BUENA SUERTE 33L COM	<b>Unit or CA Number:</b> NMNM89332
<b>US Well Number:</b> 3004528879	<b>Well Status:</b> Abandoned	<b>Operator:</b> DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

<b>Operator Electronic Signature:</b> FORD	<b>Signed on:</b> FEB 10, 2021 09:01 AM
<b>Name:</b> DJR OPERATING LLC	
<b>Title:</b> Regulatory Specialist	
<b>Street Address:</b> 1 Road 3263	
<b>City:</b> Aztec	<b>State:</b> NM
<b>Phone:</b> (505) 632-3476	
<b>Email address:</b> sford@djrlc.com	

Field Representative

<b>Representative Name:</b>		
<b>Street Address:</b>		
<b>City:</b>	<b>State:</b>	<b>Zip:</b>
<b>Phone:</b>		
<b>Email address:</b>		

BLM Point of Contact

<b>BLM POC Name:</b> WILLIAM F TAMBEKOU	<b>BLM POC Title:</b> PETROLEUM ENGINEER
<b>BLM POC Phone:</b> 7192698500	<b>BLM POC Email Address:</b> wtambekou@blm.gov
<b>Disposition:</b> Accepted	<b>Disposition Date:</b> 04/01/2021
<b>Signature:</b> William Max Tambekou	

P&A End of Well Report  
DJR Operating, LLC  
Buena Suerte 33L COM #001  
API: 30-045-28879  
NWSW L-33-26N-11W

Spud Date: 12/15/1992

Plugged Date: 11/19/2020

11/18/20: Plug 1: Mix and pump 10 sx class G cement through retainer into Fruitland perfs. Run CBL, TOC = 300'.

Plug 2: 1204' to 313'. Pump balanced plug of 72 sx class G cement from 1204'. 11-19-2020, tagged plug at 313'. Perf 3 holes at 130'.

11/19/21: Plugs 3 & 4: 313' to 130' inside 4 1/2" casing, pump 33 sx class G cement down casing and out BH. Top off plug: TOC in 4 1/2" casing = 31', in 7" x 4 1/2" = 8'. Mix and pump 22 sx class G top off plug.

All cement used: Class G cement mixed at 15.8 ppg. 1.15 yield.

BLM Representative onsite to witness: Jimmy Dobbins

**DJR Operating, LLC****P&A End of Well Report****Buena Suerte 33L Com 1**

API # 30-045-28879

NW/SW, Unit L, Sec 33, T26N, R11W

San Juan County, NM

GL 6233'

KB N/A

Spud Date 12/15/1992

**SURF CSG**

Hole size 8.75"  
 Csg Size: 7"  
 Wt: 20#  
 Grade: J-55  
 ID: 6.456"  
 Depth 127'  
 casing cap ft<sup>3</sup>/ft: 0.2273  
 TOC: Circ cmt  
 to surface

**FORMATION TOPS**


FORMATION TOPS	Surface
Nacimiento	N/A
Ojo Alamo	497'
Kirtland	1120'
Fruitland	1276'
Pictured Cliffs	1276'

**PROD CSG**

Hole size 6.25"  
 Csg Size: 4.5"  
 Wt: 9.5#  
 Grade: J-55  
 ID: 4.09"  
 Depth 1374'  
 casing cap ft<sup>3</sup>/ft: 0.0912  
 7x4.5 capacity ft<sup>3</sup>/ft 0.1169  
 TOC: Circ cmt  
 to surface

Cement Ret. 1204'  
 Fruitland Coal perfs  
 1240-62'

PBTD 1330'  
 TD 1385'

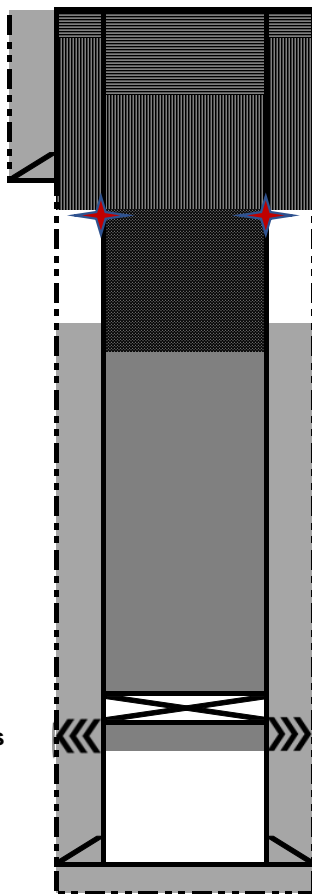

11-19-2020: Top off plug: TOC in 4 1/2" casing = 31', in 7" x 4 1/2" = 8'. Mix and pump 22 sx class G top off plug.

11-19-2020: Plugs 3 & 4: 313' to 130' inside 4 1/2" casing, pump 33 sx class G cement down casing and out BH.

Perf 3 holes at 130'

11-18-2020: Plug 2: 1204' to 313'. Pump balanced plug of 72 sx class G cement from 1204'. 11-19-2020, tagged plug at 313'.

11-18-2020: Run CBL, TOC = 300'

11-18-2020: Plug 1: Mix and pump 10 sx class G cement through retainer into Fruitland perfs.

All cement used was class G cement mixed at 15.8 ppg, yield 1.15

Regulatory Agency witness on site Jimmy Dobbins, BLM

GPS coordinates; Lat: 36.44222685601562, Lng: -108.01597215235233

**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
  
Action 57844

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 57844
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/4/2021