

Well Name: BUENA SUERTE COM	Well Location: T26N / R11W / SEC 33 / SWNW /	County or Parish/State: SAN JUAN / NM
Well Number: 1T	Type of Well: OTHER	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: I149IND7971	Unit or CA Name: 1 BUENA SUERTE 33 G COM - N/2	Unit or CA Number: NMNM92436
US Well Number: 3004532345	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2644252

Type of Submission: Subsequent Report

Date Sundry Submitted: 11/15/2021

Date Operation Actually Began: 10/20/2021

Type of Action: Plug and Abandonment

Time Sundry Submitted: 10:23

Actual Procedure: The subject well was Plugged & Abandoned on 10/20/2021 per the attached End of Well Report, Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

- PA_Marker_BS_Com_1T_20211115102334.pdf
- EOWR_Buena_Suerte_Com_1T_20211115102334.pdf
- AsPlugged_WBD_Buena_Suerte_Com_1T_20211115102334.pdf

Well Name: BUENA SUERTE COM	Well Location: T26N / R11W / SEC 33 / SWNW /	County or Parish/State: SAN JUAN / NM
Well Number: 1T	Type of Well: OTHER	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: I149IND7971	Unit or CA Name: 1 BUENA SUERTE 33 G COM - N/2	Unit or CA Number: NMNM92436
US Well Number: 3004532345	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD	Signed on: NOV 15, 2021 10:23 AM
Name: DJR OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 1 Road 3263	
City: Aztec	State: NM
Phone: (505) 632-3476	
Email address: sford@djrlc.com	

Field Representative

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Accepted	Disposition Date: 11/24/2021
Signature: Kenneth Rennick	

DJR Operating, LLC
P&A End of Well Report
Buena Suerte Com 1T
API # 30-045-32345
SW/NW, Unit E, Sec 33, T26N, R11W
San Juan County, NM
Plug Date: 10/20/2021

10/19/2021: MOLRU. LD tubing. PU CR on workstring and set at 1200'. Load and roll hole. PT casing to 800 psi for 30 minutes. PT good. Plug 1: Mixed and pumped 152 sx cement (12 sx below CR, 140 sx above CR. Circulated cement to surface. Topped off casing with 10 sx cement.

10/20/2021: Plug 2: Installed DHM. Topped off cellar with 25 sx cement. RDMOL. RELEASED RIG.

All cement used: Class G cement mixed at 15.8 ppg, yield 1.15 ft³/sx

Regulatory Representative: Darrell Priddy, BLM

GPS Coordinates: Lat: 36.44777780, Long: -108.01527777777778

/sl

DJR Operating, LLC
P&A Marker
Buena Suerte Com 1T
API # 30-045-32345
SWNW Unit E, Sec 33, T26N, R11W
San Juan County, NM



DJR Operating, LLC
AsPlugged Wellbore Diagram

Buena Suerte Com 1T

API # 30-045-32345

SW/NW, Unit E, Sec 33, T26N, R11W
 San Juan County, NM

GL 6178'

KB N/A

Spud Date 3/20/2006

SURF CSG

Hole size 12.25"
 Csg Size: 8.625"
 Wt: 24#
 Grade: K-55
 ID: 6.336"
 Depth 135'
 casing cap ft3/ft: 0.3575
 TOC: Cmt 3'
 from surface

FORMATION TOPS


Nacimiento	Surface
Ojo Alamo	265'
Kirtland	382'
Fruitland Coal	1120'
Pictured Cliffs	1272'

PROD CSG

Hole size 7.875"
 Csg Size: 5.5"
 Wt: 15.5#
 Grade: J-55
 ID: 4.95"
 Depth 1445'
 casing cap ft3/ft: 0.1336
 8.625x5.5 cap ft3/ft 0.1926
 TOC: Circ cmt
 to surface

Cement Ret. 1200'
 Fruitland Coal perms
 1237-56'

PBTD 1445'
 TD 1500'

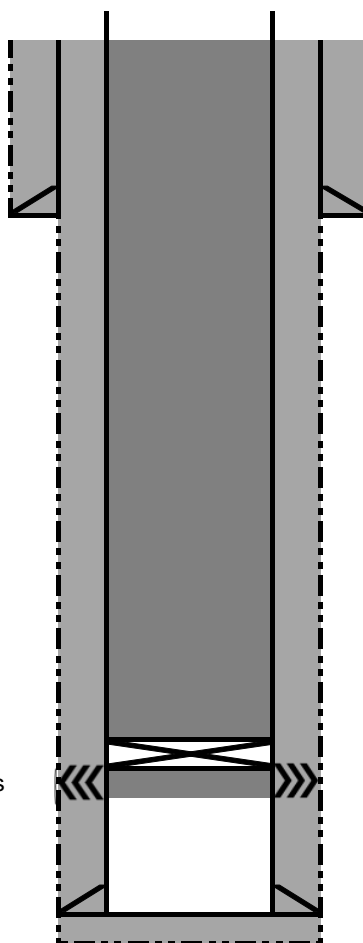

10/20/2021: Installed DHM. Plug 2:
 Topped off cellar with 25 sx cement.
 RELEASED RIG.

10/19/2021: Plug 1: Set CR at 1200'.
 Mixed and pumped 152 sx cement (12 sx
 below CR, 140 sx above CR. Circulated
 cement to surface. Topped off casing with
 10 sx cement.

All cement used was Class G cement mixed at 15.8 ppq, yield 1.15 ft³
 Regulatory Representative: Darrell Priddy, BLM
 GPS Coordinates: Lat: 36.44777780, Lng: -108.01527777777778

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 63601

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 63601
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	12/28/2021