

Well Name: SOUTH BISTI 21C	Well Location: T25N / R12W / SEC 21 / NENW / 36.391068 / -108.118362	County or Parish/State: SAN JUAN / NM
Well Number: 1	Type of Well: OIL WELL	Allottee or Tribe Name:
Lease Number: NMSF078065	Unit or CA Name:	Unit or CA Number:
US Well Number: 3004527783	Well Status: Abandoned	Operator: DJR OPERATING LLC

Subsequent Report

Sundry ID: 2654408
Type of Submission: Subsequent Report **Type of Action:** Plug and Abandonment
Date Sundry Submitted: 01/27/2022 **Time Sundry Submitted:** 10:38
Date Operation Actually Began: 01/18/2022

Actual Procedure: The subject well was Plugged & Abandoned on 01/18/2022 per the attached End of Well Report, Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

- PA_Marker_South_Bisti_21_C_1_20220127103829.pdf
- EOWR_South_Bisti_21_C_1_20220127103829.pdf
- As_Plugged_WBD_South_Bisti_21_C_1_20220127103829.pdf

Well Name: SOUTH BISTI 21C

Well Location: T25N / R12W / SEC 21 / NENW / 36.391068 / -108.118362

County or Parish/State: SAN JUAN / NM

Well Number: 1

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMSF078065

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004527783

Well Status: Abandoned

Operator: DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: JAN 27, 2022 10:38 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 Road 3263

City: Aztec

State: NM

Phone: (505) 632-3476

Email address: sford@djrlc.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647742

BLM POC Email Address: krennick@blm.gov

Disposition: Accepted

Disposition Date: 02/01/2022

Signature: Kenneth Rennick

DJR Operating, LLC
P&A End of Well Report
South Bisti 21 C 1
API # 30-045-27783
NE/NW, Unit C, Sec 21, T25N, R12W
San Juan County, NM
Spud Date: 5/12/1990
Plug Date: 1-18-2022

12-04 to 07-2020:

MIRU rig and equipment. SITP = 0, SICP = 0, BH = 0.

Pull rods. TOOH with 2 3/8" production string.

Release rig.

1-12-2022:

MIRU rig and equipment.

1-13-2022:

TIH with bit and string mill to 4737'. TOOH.

TIH with CR, set CR at 4708'. PT casing, casing did not test.

Plugs 1 & 2: Gallup perms and Gallup formation top: Mix and pump 10 sx cement under CR into Gallup perms. Sting out of CR, place 20 sx cement above CR. WOC.

11-14-2022:

TIH, tagged Plug 2 at 4510'.

Plug 3: Mancos: Pull up to 3746'. Mix and pump a balanced plug of 20 sx cement from 3746'. WOC. Tagged Plug 3 at 3585'.

Plug 4: Mesa Verde: Pull up to 2200'. Mix and pump balanced plug of 20 sx cement from 2200'. WOC.

11-18-2022:

TIH, tagged Plug 4 at 2060'. PT casing, good test.

Plug 5: Chacra & Pictured Cliffs. Mix and pump a balanced plug of 55 sx cement from 1511' to 1030'.

Plug 6: Fruitland, Kirtland, and Ojo Alamo: Pull up to 785'. Mix and pump 88 sx cement from 785' to surface.

Cut off WH. Check TOC; annulus = 77', inside 5 1/2" casing = 65'.

Install P&A marker.

Mix and top off casings and cellar with 45 sx cement.

RD, Release rig.

All cement used: Class G cement mixed at 15.8 ppg, yield 1.15 ft³/sx

Regulatory Representative(s): Clayton Yazzie / Ken Christenson, BLM

GPS Coordinates: Lat; 36.39119N, Long; 108.11910W

**End of Well Report
DJR Operating, LLC
South Bisti 21 C 1**

API # 30-045-27783
NE/NW, Unit C, Sec 21, T25N, R12W
San Juan County, NM


GL 6283'
KB 6296'
Spud Date 5/12/1990

SURF CSG

Hole size 12.25"
Csg Size: 8.625"
Wt: 24#
Grade: J-55
ID: 8.097"
Depth 364
Csg cap ft³: 0.3576
TOC: Surface
Circulated cement to surface

FORMATION TOPS

Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	540'
Fruitland	718'
Pictured Cliffs	1130'
Chacra	1455'
Mesa Verde	2150'
Mancos	3690'
Gallup	4628'

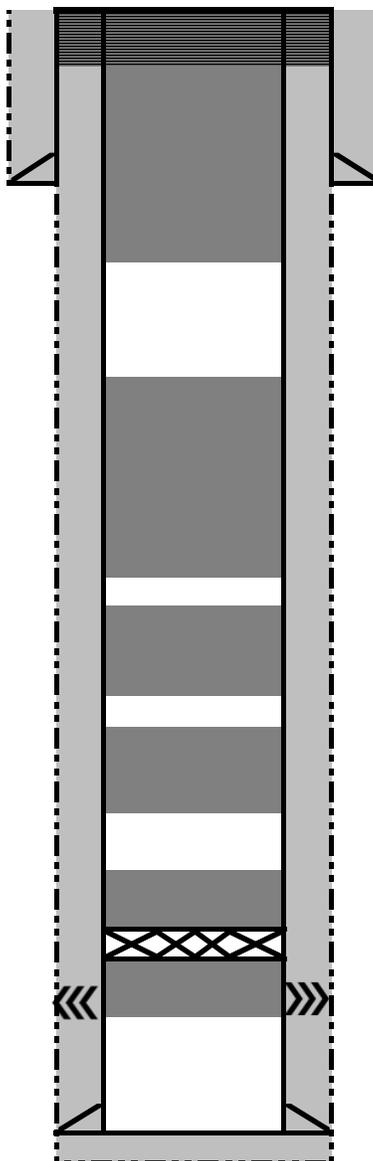

1-18-2022: Top off plug. Cut off WH. TOC in annulus = 77', in 5 1/2" casing = 65'. Install P&A marker, top off with 45 sx.

1-18-2022: Plug 6: Fruitland, Kirtland, Ojo Alamo, surface casing shoe. Mix and pump plug of 88 sx from 785' to surface.

1-18-2022: Plug 5: Chacra & Pictured Cliffs: Spot balanced plug of 55 sx from 1511' to 1030'.

1-18-2022: PT casing, good test.

1-14-2022: Plug 4: Mesa Verde: Spot balanced plug of 20 sx from 2200'. WOC. 1-18-2022: Tagged Plug 4 at 2060'.

1-14-2022: Plug 3: Mancos: Spot balanced plug of 20 sx from 3746'. WOC. Tagged Plug 3 at 3585'.

1-13-2022: Plug 2: Gallup: Place 20 sx on top of retainer from 4708', WOC, tagged Plug 2 at 4510'.

1-13-2022: Plug 1: Gallup perfs: Set CR at 4708'. PT casing, casing did not test. Mix and pump 10 sx through CR.

Perfs 4740-49'

PBTD 4920'
TD 4975'

All cement used was Class G mixed at 15.8 ppq, yield 1.15 ft³
Regulatory representatives: Clayton Yazzie & Ken Christenson, BLM
GPS Coordinates: 39.39119N, 108.11910W

DJR Operating, LLC
P&A Marker
South Bisti 21 C 1
API # 30-045-27783
NE/NW, Unit C, Sec 21, T25N, R12W
San Juan County, NM
Spud Date: 5/12/1990
Plug Date: 1-18-2022



District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 77230

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 77230
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	3/1/2022