

| | | |
|-----------------------------------|---|--|
| Well Name: SUNDANCE 10 FED | Well Location: T24S / R31E / SEC 10 / NWNW / | County or Parish/State: EDDY / NM |
| Well Number: 1 | Type of Well: OIL WELL | Allottee or Tribe Name: |
| Lease Number: NMNM70895 | Unit or CA Name: | Unit or CA Number: |
| US Well Number: 3001528122 | Well Status: Oil Well Shut In | Operator: OXY USA INCORPORATED |

Accepted for record – NMOCD gc 8/11/2022

Notice of Intent

Sundry ID: 2684603

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 07/28/2022

Time Sundry Submitted: 03:39

Date proposed operation will begin: 08/28/2022

Procedure Description: SEE ATTACHED CURRENT WELLBORE, PROPOSED WELLBORE, AND PLUGGING PROCEDURE.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Sundance_10_1_P_A_Intent_SUBMISSION_PACKET_20220728153831.pdf

Well Name: SUNDANCE 10 FED

Well Location: T24S / R31E / SEC 10 / NWNW /

County or Parish/State: EDDY / NM

Well Number: 1

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMNM70895

Unit or CA Name:

Unit or CA Number:

US Well Number: 3001528122

Well Status: Oil Well Shut In

Operator: OXY USA INCORPORATED

Conditions of Approval

Specialist Review

Sundance_10_Fed_1_Sundry_ID_2684603_P_A_20220803132553.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: STEPHEN JANACEK

Signed on: JUL 28, 2022 03:38 PM

Name: OXY USA INCORPORATED

Title: Regulatory Engineer

Street Address: 5 Greenway Plaza, Suite 110

City: Houston

State: TX

Phone: (713) 497-2417

Email address: stephen_janacek@oxy.com

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: LONG VO

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752345972

BLM POC Email Address: LVO@BLM.GOV

Disposition: Approved

Disposition Date: 08/03/2022

Signature: Long Vo

Notice of Intent to PA
 Sundance 10 Federal 001
 30-015-28122
 OXY USA Inc.

- 10# MLF between plugs. Utilize above ground steel tanks
1. POOH with production equipment
 2. Tag casing shoe at 8345' and spot cement from 8345' to 8075' to isolate the Brushy Canyon (Delaware) and the Bone Springs Formation. 35 sx class H. WOC and Tag.
 3. Set CIBP @ 7096' Spot 30 Sx of Class C to 6805'. WOC - tag (Tag above top of perforation at 6919')
 4. Set CIBP @ 6340' Spot 50 sx of class C to 5880'. WOC - Tag
 5. Set CIBP @ 4310' Spot 145 sx of class C to 2874'. Woc Tag, Leak Test CIBP.
 6. Spot 145 sx of class C from 2874 to 1440'. Woc Tag
 7. Spot 135 sx of class C from 1440' to 100'. WOC & Tag
 8. Perf @ 100ft, circulate 25 sx of Class C to surface. Verify cement at surface

| ETC. | NAME | TOP | |
|------|-----------------|-------------|------------------|
| | | MEAS. DEPTH | TRUE VERT. DEPTH |
| | Basal Anhydrite | 4086 | log |
| | Bell Canyon | 4253 | log |
| | Delaware Lime | 4317 | log |
| | Brushy Canyon | 6499 | log |
| | Bone Spring | 8208 | log |

Fredua Appou

Current Wellbore


7/16/2022

Sundance 10 Federal 001

30-015-28122-0000

Eddy

String 1
OD 13.375 in 54.5#
TD 585 ft
TOC 0 ft
17.5" Drilled Hole

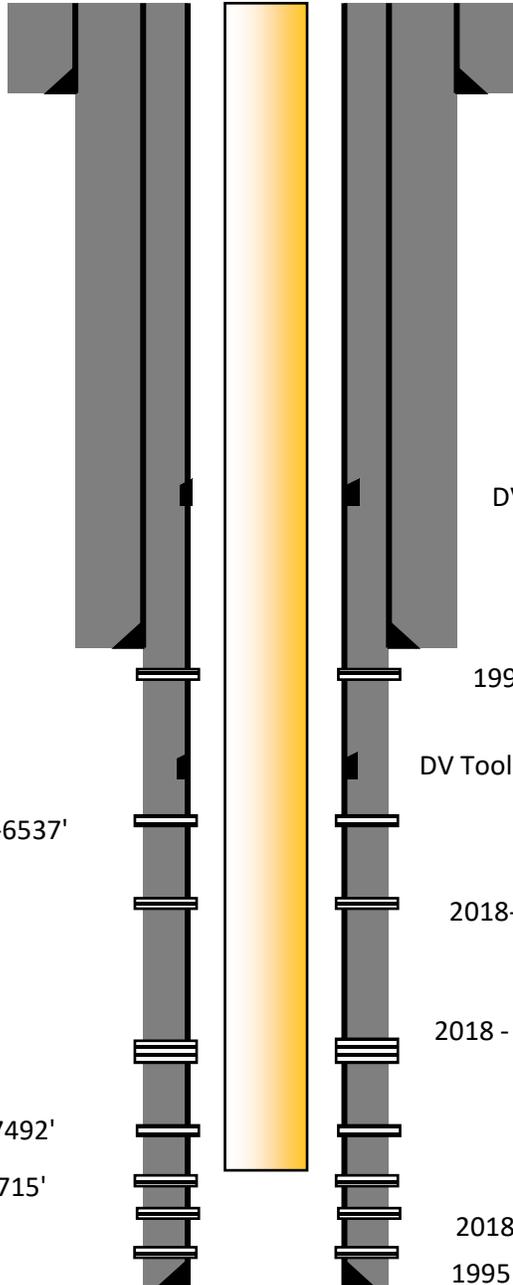

String 2
OD 8.625 in 32#
TD 4190 ft
TOC 0 ft
11" Drilled Hole

2018-Perf 6530'-6537'

2018 - Perf 7486'-7492'

2018 - Perf 7704'-7715'

String 3
OD 5.5 in 17#
TD 8345 ft
TOC 0 ft
PBTD 8345 ft

7.875" Drilled Hole

DV tool 3012'

1995-Perf 4360'-4386'

DV Tool @5990"

2018- Perf 6919'-6925'

2018 - Perf 7146'-7262'

Tubing Assembly
OD 2.875 in
Top 0 ft
Bot 7590 ft

2018 - Perf 7925'-7932'

1995 - Perf 8090'-8159'

PROPOSED WELLBORE

See COA for requirements.

Fredua Appou

7/16/2022

Sundance 10 Federal 001


30-015-28122-0000

Eddy

String 1
OD 13.375 in 54.5#
TD 585 ft
TOC 0 ft
17.5" Drilled Hole

String 2
OD 8.625 in 32#
TD 4190 ft
TOC 0 ft
11" Drilled Hole

String 3
OD 5.5 in 17#
TD 8345 ft
TOC 0 ft
PBSD 8345 ft
7.875" Drilled Hole

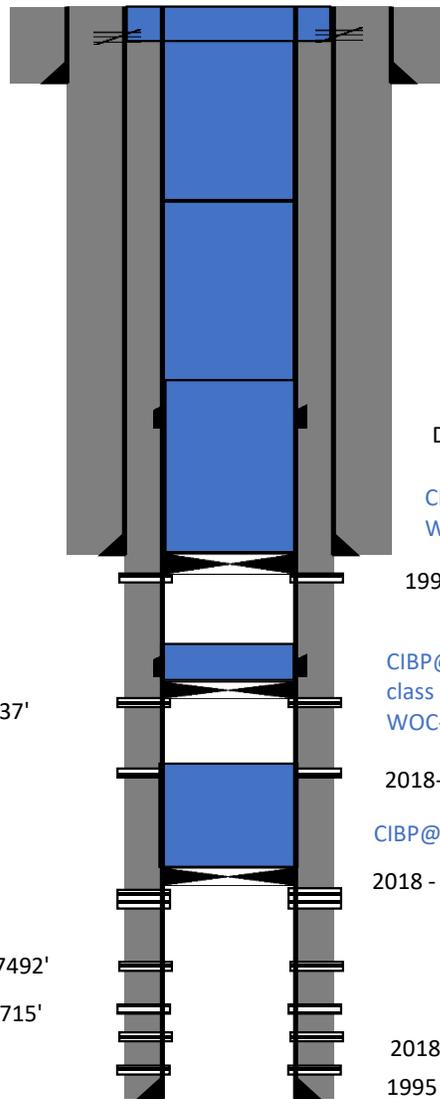

Perf @60' and squeeze to surface. Verify CMT at surface

Spot 150 sxs 1440' to 60' sxs class C
WOC-TAG

2874'-1440 Spot 160 sxs class C
WOC-TAG

DV tool 3012'

CIBP@ 4310' Spot 160 sx to 2874' class C
WOC-TAG

1995-Perf 4360'-4386'

CIBP@ 6340' Spot 45 sx to 5940'
class C (Brushy & DV tool @ 5990)
WOC-TAG

2018- Perf 6919'-6925'

CIBP@ 7096' 30 sx to 6850' Class C - WOC-TAG

2018 - Perf 7146'-7262'

2018-Perf 6390'-6537'

2018 - Perf 7486'-7492'

2018 - Perf 7704'-7715'

2018 - Perf 7925'-7932'

1995 - Perf 8090'-8159'

| Sundry ID | | 2684603 | | | | |
|---------------------|---------|---------|--------|---|--------|--|
| Plug Type | Top | Bottom | Length | Tag | Sacks | Notes |
| Surface Plug | 0.00 | 100.00 | 100.00 | Tag/Verify | 25.00 | Perf and attempt squeeze at 100' to surface. |
| Shoe Plug | 529.15 | 635.00 | 105.85 | Tag/Verify | | |
| Top of Salt @ 850 | 791.50 | 900.00 | 108.50 | Tag/Verify | 135.00 | Spot from 1440' to 100'. WOC and Tag. |
| | | | | If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open | | |
| Fresh Water @ 868 | 809.32 | 918.00 | 108.68 | Perforatio | 145.00 | Spot from 2874' to 1440'. WOC and Tag. |
| DV tool plug | 2931.88 | 3062.00 | 130.12 | Tag/Verify | | |
| Base of Salt @ 4086 | 3995.14 | 4136.00 | 140.86 | Tag/Verify | | |
| Shoe Plug | 4098.10 | 4240.00 | 141.90 | Tag/Verify | | |
| | | | | If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open | | |
| Delaware @ 4253 | 4160.47 | 4303.00 | 142.53 | Perforatio | | |

| | | | | | | |
|---------------------------------------|---------|---------|--------|---|--------|---|
| | | | | If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open | | |
| CIBP Plug | 4275.00 | 4310.00 | 35.00 | Perforatio | 145.00 | Set CIBP at 4310'. Spot from 4310' to 2874'. WOC and Tag. Leak test CIBP. |
| Perforations Plug (If No CIBP) | 4292.14 | 4436.00 | 143.86 | Tag/Verify | | |
| DV tool plug | 5880.10 | 6040.00 | 159.90 | Tag/Verify | | |
| | | | | If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open | | |
| CIBP Plug | 6305.00 | 6340.00 | 35.00 | Perforatio | 50.00 | Set CIBP at 6340'. Spot from 6340' to 5880'. WOC and Tag. |
| Perforations Plug (If No CIBP) | 6340.00 | 6587.00 | 247.00 | Tag/Verify | | |
| Brushy Canyon @ 6499 | 6384.01 | 6549.00 | 164.99 | If solid | | |
| Perforations Plug (If No CIBP) | 6805.75 | 6975.00 | 169.25 | Tag/Verify | | |

| | | | | | | |
|---------------------------------------|---------|---------|--------|---|-------|--|
| | | | | If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open | | |
| CIBP Plug | 7061.00 | 7096.00 | 35.00 | Perforatio | 30.00 | Set CIBP at 7096'. Spot from 7096' to 6805'. WOC and Tag. |
| Perforations Plug (If No CIBP) | 7096.00 | 7312.00 | 216.00 | Tag/Verify | | |
| Perforations Plug (If No CIBP) | 7367.08 | 7542.00 | 174.92 | Tag/Verify | | |
| Perforations Plug (If No CIBP) | 7587.85 | 7765.00 | 177.15 | Tag/Verify | | |
| Perforations Plug (If No CIBP) | 7802.68 | 7982.00 | 179.32 | Tag/Verify | | |
| Perforations Plug (If No CIBP) | 8017.51 | 8199.00 | 181.49 | Tag/Verify | | |
| | | | | If solid base no need to Tag (CIBP present and/or Mechanical Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open | | |
| Bonesprings @ 8208 | 8075.92 | 8258.00 | 182.08 | Perforatio | | |
| | | | | | | |
| Shoe Plug | 8211.55 | 8395.00 | 183.45 | Tag/Verify | 35.00 | Tag casing shoe at 8345' and spot cement from 8345' to 8075' to isolate the Brushy Canyon and the Bone Springs Formation. WOC and Tag. |

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole.

Class H >7500'

Class C <7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater

R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft³/sx

Class H: 1.06 ft³/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement R111-P 50 Feet from Base of Salt to surface

| | | | |
|-------------------|---------|-----------------------|---------|
| Shoe @ | 585.00 | | |
| Shoe @ | 4190.00 | | |
| | | | |
| Shoe @ | 8345.00 | | |
| | | | |
| Perforatons Top @ | 8090.00 | Perforations Bottom @ | 8149.00 |
| Perforatons Top @ | 7925.00 | Perforations Bottom @ | 7932.00 |
| Perforatons Top @ | 7704.00 | Perforations Bottom @ | 7715.00 |
| Perforatons Top @ | 7486.00 | Perforations Bottom @ | 7492.00 |
| Perforatons Top @ | 7146.00 | Perforations Bottom @ | 7262.00 |
| Perforatons Top @ | 6919.00 | Perforations Bottom @ | 6925.00 |
| DV Tool @ | 3012.00 | CIBP @ | 7096.00 |
| DV Tool @ | 5990.00 | CIBP @ | 6340.00 |
| | | CIBP @ | 4310.00 |

**BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972**

**Permanent Abandonment of Federal Wells
Conditions of Approval (LPC Habitat)**

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **ninety (90)** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Below Ground Level Cap (Lesser Prairie-Chicken Habitat): All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.** Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least ¼ inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**

8. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1st through June 15th annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office
620 E. Greene St.
Carlsbad, New Mexico 88220-6292
www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo “interim” reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo “final” reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines **(Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure)**. Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. **This will apply to well pads, facilities, and access roads.** Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you

have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos
Supervisory Petroleum Engineering Tech/Environmental Protection Specialist
575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias
Environmental Protection Specialist
575-234-6230

Crisha Morgan
Environmental Protection Specialist
575-234-5987

Jose Martinez-Colon
Environmental Protection Specialist
575-234-5951

Mark Mattozzi
Environmental Protection Specialist
575-234-5713

Robert Duenas
Environmental Protection Specialist
575-234-2229

Trishia Bad Bear, Hobbs Field Station
Natural Resource Specialist
575-393-3612

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 131784

CONDITIONS

| | |
|--|---|
| Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294 | OGRID: 16696 |
| | Action Number: 131784 |
| | Action Type: [C-103] NOI Plug & Abandon (C-103F) |

CONDITIONS

| Created By | Condition | Condition Date |
|------------|-----------|----------------|
| gcordero | None | 8/11/2022 |