<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III 1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170 **District IV** 

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

## **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form C-101 August 1, 2011

Permit 323290

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZO
--

Operator Name and Address		2. OGRID Number
MEWBOURNE OIL CO		14744
P.O. Box 5270		3. API Number
Hobbs, NM 88241		30-015-49893
4. Property Code	5. Property Name	6. Well No.
333206	Rio Grande 2/1 B3DA State Com	001H

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
E	2	19S	28E	E	2040	N	210	W	Eddy

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
Α	1	19S	28E	Α	660	N	100	E	Eddv

#### 9. Pool Information

PALMILLO;BONE SPRING, EAST	49553

#### Additional Well Information

11. Work Type	12. Well Type	13. Cable/Rotary	14. Lease Type	15. Ground Level Elevation
New Well	OIL		State	3475
16. Multiple	17. Proposed Depth	18. Formation	19. Contractor	20. Spud Date
N	18667	3rd Bone Spring Sand		9/15/2022
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

#### ☑ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Туре	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	48	325	290	0
Int1	12.25	9.625	36	900	285	0
Prod	8.75	7	26	8088	835	700
Liner1	6.125	4.5	13.5	18667	430	7888

#### Casing/Cement Program: Additional Comments

MOC proposed to drill & test the Bone Springs formation. H2S rule 118 does not apply because MOC has researched the area & no high concentrations were found. Will have on location & working all H2S safety equiptment before Yates formation for safety & insurance purposes. Will stimulate as needed for production.

22. Proposed Blowout Prevention Program

Туре	Working Pressure	Test Pressure	Manufacturer	
Annular	5000	2500	Schaffer	
Double Ram	5000	5000	Schaffer	
Annular	5000	2500	Schaffer	

knowledge and be	elief.	true and complete to the best of my NMAC ⊠ and/or 19.15.14.9 (B) NMAC		OIL CONSERVATIO	N DIVISION	
Printed Name:	Electronically filed by Monty Whe	Approved By:	Katherine Pickford			
Title:	Vice President Operations		Title:	Geoscientist		
Email Address:	fking@mewbourne.com		Approved Date:	8/25/2022	Expiration Date: 8/25/2024	
Date:	8/18/2022	Phone: 903-561-2900	Conditions of Approval Attached			

District I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462 State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

■ AMENDED REPORT


#### WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number		<sup>2</sup> Pool Code		
30-015-49893		96413	OUTHWEST	
<sup>4</sup> Property Code <b>333206</b>			pperty Name  1 B3DA STATE COM	<sup>6</sup> Well Number <b>1 H</b>
7 OGRID NO. 14744		MEWBOURNE	<sup>9</sup> Elevation <b>3475</b>	

<sup>10</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West line	County
E	2	19S	28E		2040	NORTH	210	WEST	EDDY
11 Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	1	19S	28E		660	NORTH	100	EAST	EDDY
12 Dedicated Acres	s 13 Joint	or Infill 14	Consolidation	Code 15 (	Order No.				•
320									

No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

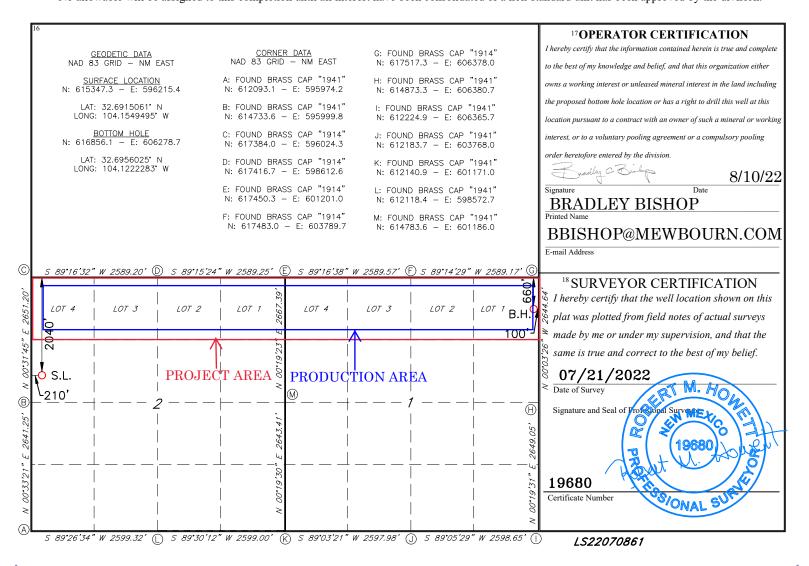

Form APD Conditions

Permit 323290

District I

1625 N. French Dr., Hobbs, NM 88240

Phono(F7F) 202 6161 Fow(F7F) 203 6

Phone: (575) 393-6161 Fax: (575) 393-0720 <u>District II</u>
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

<u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

<u>District IV</u> 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462 State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

#### PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:			
MEWBOURNE OIL CO [14744]	30-015-49893			
P.O. Box 5270	Well:			
Hobbs, NM 88241	Rio Grande 2/1 B3DA State Com #001H			
OCD Condition				
Reviewer				
kpickford Notify OCD 24 hours prior to casing & cement				
Imiglified Will require a File As Drilled C 400 and a Directional Company with the C 404				

kpickford Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh

kpickford Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud,

kpickford The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

water zone or zones and shall immediately set in cement the water protection string kpickford Cement is required to circulate on both surface and intermediate1 strings of casing

drilling fluids and solids must be contained in a steel closed loop system

## State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

### NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.											
This Natural Gas Manag	ement ran m				<i>y</i>	D) 101 u 1	1011 01	recompleted wen.			
Section 1 – Plan Description  Effective May 25, 2021											
I. Operator:Mew	/bourne (	Oil Co.	OGRID:	14744		_ Date: _	5/2	/22			
II. Type: X Original □	Amendment	due to □ 19.15.27	.9.D(6)(a) NMA	C □ 19.15.27.9.D(	6)(b) NN	иас □ (	Other.				
If Other, please describe											
III. Well(s): Provide the be recompleted from a si	following infingle well pad	formation for each or connected to a	new or recomple central delivery p	ted well or set of voint.	wells pro	posed to	be dril	led or proposed to			
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Antici Gas M	ipated ICF/D	-				
Rio Grande 2/1 B3DA State Com 1H		E 2 19S 28E	2040' FNL x 210' F	wL 1500	3500	0		2500			
IV. Central Delivery Po V. Anticipated Schedul proposed to be recomple	e: Provide the	following informa	ande 2/1 B3DA S ation for each new	v or recompleted w	rell or set			7.9(D)(1) NMAC] sed to be drilled or			
Well Name	API	Spud Date	TD Reached Date	Completion Commencement		Initial F Back D		First Production Date			
Rio Grande 2/1 B3DA State Com 1H		7/2/22	8/2/22	9/2/22		9/17/22	2	9/17/22			
VI. Separation Equipment:  ☐ Attach a complete description of how Operator will size separation equipment to optimize gas capture.  VII. Operational Practices:  ☐ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.  VIII. Best Management Practices:  ☐ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.											

## Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

M Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

## IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

#### X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map.   Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

III. Line Capacity. The natural	as gathering system $\square$ will $\square$ will not have capacity to gather 100% of the anticipated nat	tural gas
production volume from the well	rior to the date of first production.	

XIII. Line Pressure. Operator $\square$ does $\square$ does not anticipate that its existing well(s) connected to the same segment,	or portion,	of the
natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by	the new we	ell(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: 

Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

# Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🛮 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan. 

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) power generation for grid; (b) compression on lease: (c) (d) liquids removal on lease;

- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

#### Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:	Bradley Bishop
Printed Name:	BRADLEY BISHOP
Title:	REGULATORY MANAGER
E-mail Address:	BBISHOP@MEWBOURNE.COM
Date:	5/2/22
Phone:	575-393-5905
	OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:	
Title:	
Approval Date:	
Conditions of Ap	proval:

#### Mewbourne Oil Company

#### Natural Gas Management Plan - Attachment

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Mewbourne Oil Company (MOC) will take following actions to comply with the regulations listed in 19.15.27.8:
  - A. MOC will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. MOC will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas. If there is no adequate takeaway for the gas, well(s) will be shut in until the natural gas gathering system is available.
  - B. All drilling operations will be equipped with a rig flare located at least 100 ft from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
  - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flow will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, MOC will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications, whichever is sooner. MOC will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
  - D. Natural gas will not be flared with the exceptions and provisions listed in the 19.15.27.8 D.(1) through (4). If there is no adequate takeaway for the separator gas, well(s) will be shut in until the natural gas gathering system is available with exception of emergency or malfunction situations. Venting and/or flaring volumes will be estimated and reported appropriately.
  - E. MOC will comply with the performance standards requirements and provisions listed in 19.15.27.8 E.(1) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs in order to minimize the waste. Production storage tanks constructed after May 25, 2021 will be equipped with automatic gauging system. Flares constructed after May 25, 2021 will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. MOC will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
  - F. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared or beneficially used during production operations, will be measured or estimated. MOC will install equipment to measure

the volume of natural gas flared from existing process piping or a flowline piped from equipment such as high pressure separators, heater treaters, or vapor recovery units associated with a well or facility associated with a well authorized by an APD issued after May 25, 2021 that has an average daily production greater than 60 Mcf/day. If metering is not practicable due to circumstances such as low flow rate or low pressure venting and flaring, MOC will estimate the volume of vented or flared natural gas. Measuring equipment will conform to industry standards and will not be designed or equipped with a manifold that allows the diversion of natural gas around the metering element except for the sole purpose of inspecting and servicing the measurement equipment.

VIII. For maintenance activities involving production equipment and compression, venting will be limited to the depressurization of the subject equipment to ensure safe working conditions. For maintenance of production and compression equipment the associated producing wells will be shut in to eliminate venting. For maintenance of VRUs all gas normally routed to the VRU will be routed to flare to eliminate venting.

Inten	t	As Dril	led										
API #	:												
Ope	rator Nai	me:				Property N	ame	:					Well Number
Kick (	Off Point	(KOB)											
UL	Section	Township	Range	Lot	Feet	From N	I/S	Feet		From	E/W	County	
Latitu	ude				Longitu	ıde						NAD	
First <sup>-</sup>	Take Poir	t (FTP)	Range	Lot	Feet	From N	I/S	Feet		From	F/W	County	
Latitu		1 SWIISIII P	nange		Longitu		TIN/3 Feet					NAD	
Last 1	ake Poin	t (LTP)											
UL	Section	Township	Range	Lot	Feet	From N/S	Feet	:	From E	/W	Count	У	
Latitu	ıde				Longitu	Longitude NAD							
Is this	s well the	defining v	vell for th	ne Hori	zontal S <sub>l</sub>	pacing Unit?			]				
Is this	s well an	infill well?											
	ll is yes p ng Unit.	lease provi	ide API if	availal	ole, Ope	rator Name	and v	vell ni	umber	for D	efinir	ng well fo	r Horizontal
API #	:												
Ope	rator Nai	ne:	1			Property N	ame	:					Well Number
													V7.06/20/2011

KZ 06/29/2018

## **Mewbourne Oil Company**

Eddy County, New Mexico NAD 83 Rio Grande 2/1 B3DA State Com #1H

Sec 2, T19S, R28E

SHL: 2040' FNL & 210' FWL, Sec 2 BHL: 660' FNL & 100' FEL, Sec 1

Plan: Design #1

## **Standard Planning Report**

11 August, 2022

Database: Company:

Hobbs

Mewbourne Oil Company

Project: Site:

Eddy County, New Mexico NAD 83 Rio Grande 2/1 B3DA State Com #1H

Well:

Sec 2, T19S, R28E

Wellbore:

BHL: 660' FNL & 100' FEL, Sec 1

Design #1 Design:

**Local Co-ordinate Reference:** 

**TVD Reference:** MD Reference: North Reference:

**Survey Calculation Method:** 

Site Rio Grande 2/1 B3DA State Com #1H WELL @ 3503.0usft (Original Well Elev)

WELL @ 3503.0usft (Original Well Elev)

Minimum Curvature

Project

Eddy County, New Mexico NAD 83

Map System: Geo Datum:

US State Plane 1983 North American Datum 1983 System Datum:

Ground Level

Map Zone:

New Mexico Eastern Zone

Site

Rio Grande 2/1 B3DA State Com #1H

Site Position: From:

Northing: Мар Easting:

615,347.30 usft 596,215.40 usft Latitude: Longitude:

32.6915061 -104.1549494

**Position Uncertainty:** 

0.0 usft

Sec 2, T19S, R28E

Slot Radius:

13-3/16 "

+N/-S 0.0 usft +E/-W 0.0 usft

Northing: Easting:

615,347.30 usft 596,215.40 usft Latitude: Longitude:

32.6915061 -104.1549494

**Position Uncertainty Grid Convergence:** 

**Well Position** 

0.0 usft 0.10°

Wellhead Elevation:

3,503.0 usft

**Ground Level:** 

3,475.0 usft

Wellbore

Well

BHL: 660' FNL & 100' FEL, Sec 1

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	12/31/2014	7.45	60.43	48,453.61970553

Design #1 Design Audit Notes: **PROTOTYPE** Tie On Depth: 0.0 Version: Phase: Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 81.47 0.0

0.0

**Plan Survey Tool Program** 

Date 8/11/2022

0.0

**Depth From** (usft)

Depth To (usft)

Survey (Wellbore)

**Tool Name** 

Remarks

0.0

18,666.8 Design #1 (BHL: 660' FNL & 100'

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
950.0	0.00	0.00	950.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,564.7	12.29	352.25	1,560.0	65.1	-8.9	2.00	2.00	0.00	352.25	
7,473.3	12.29	352.25	7,333.1	1,311.6	-178.5	0.00	0.00	0.00	0.00	
8,087.9	0.00	0.00	7,943.0	1,376.7	-187.4	2.00	-2.00	0.00	180.00 H	(OP: 660' FNL & 10'
8,983.8	89.58	89.26	8,516.0	1,384.0	381.3	10.00	10.00	0.00	89.26	
18,666.8	89.58	89.26	8,587.0	1,508.8	10,063.3	0.00	0.00	0.00	0.00 E	BHL: 660' FNL & 100

Database: Hobbs

Company: Mewbourne Oil Company

Project: Eddy County, New Mexico NAD 83
Site: Eddy County, New Mexico NAD 83
Rio Grande 2/1 B3DA State Com #1H

BHL: 660' FNL & 100' FEL, Sec 1

Well: Sec 2, T19S, R28E

Design: Design #1

Wellbore:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

**Survey Calculation Method:** 

Site Rio Grande 2/1 B3DA State Com #1H WELL @ 3503.0usft (Original Well Elev) WELL @ 3503.0usft (Original Well Elev)

Grid

ed Survey									
Measured			Vertical			Vertical	Dogleg	Build	Turn
Depth (usft)	Inclination (°)	Azimuth (°)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Section (usft)	Rate (°/100usft)	Rate (°/100usft)	Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SHL: 2040' F	NL & 210' FWL (	(2)							
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
950.0	0.00	0.00	950.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	1.00	352.25	1,000.0	0.4	-0.1	0.0	2.00	2.00	0.00
1,100.0	3.00	352.25	1,099.9	3.9	-0.5	0.1	2.00	2.00	0.00
1,200.0	5.00	352.25	1,199.7	10.8	-1.5	0.1	2.00	2.00	0.00
1,300.0	7.00	352.25	1,299.1	21.2	-2.9	0.3	2.00	2.00	0.00
1,400.0	9.00	352.25	1,398.2	34.9	-4.8	0.5	2.00	2.00	0.00
1,500.0	11.00	352.25	1,496.6	52.2	-7.1	0.7	2.00	2.00	0.00
1,564.7	12.29	352.25	1,560.0	65.1	-8.9	0.9	2.00	2.00	0.00
1,600.0	12.29	352.25	1,594.5	72.5	-9.9	1.0	0.00	0.00	0.00
1,700.0	12.29	352.25	1,692.2	93.6	-12.7	1.3	0.00	0.00	0.00
1,800.0	12.29	352.25	1,789.9	114.7	-15.6	1.6	0.00	0.00	0.00
1,900.0	12.29	352.25	1,887.6	135.8	-18.5	1.9	0.00	0.00	0.00
2,000.0	12.29	352.25	1,985.3	156.9	-21.4	2.1	0.00	0.00	0.00
2,100.0	12.29	352.25	2,083.0	178.0	-24.2	2.4	0.00	0.00	0.00
2,200.0	12.29	352.25	2,180.7	199.1	-27.1	2.7	0.00	0.00	0.00
2,300.0	12.29	352.25	2,278.4	220.2	-30.0	3.0	0.00	0.00	0.00
2,400.0	12.29	352.25	2,376.1	241.3	-32.8	3.3	0.00	0.00	0.00
2,500.0	12.29	352.25	2,473.8	262.4	-35.7	3.6	0.00	0.00	0.00
2,600.0	12.29	352.25	2,571.6	283.5	-38.6	3.9	0.00	0.00	0.00
2,700.0	12.29	352.25	2,669.3	304.6	-41.5	4.2	0.00	0.00	0.00
2,800.0	12.29	352.25	2,767.0	325.7	-44.3	4.4	0.00	0.00	0.00
2,900.0	12.29	352.25	2,864.7	346.8	-47.2	4.7	0.00	0.00	0.00
3,000.0	12.29	352.25	2,962.4	367.9	-50.1	5.0	0.00	0.00	0.00
3,100.0	12.29	352.25	3,060.1	389.0	-53.0	5.3	0.00	0.00	0.00
3,200.0	12.29	352.25	3,157.8	410.1	-55.8	5.6	0.00	0.00	0.00
3,300.0	12.29	352.25	3,255.5	431.2	-58.7	5.9	0.00	0.00	0.00
3,400.0	12.29	352.25	3,353.2	452.3	-61.6	6.2	0.00	0.00	0.00
3,500.0	12.29	352.25	3,450.9	473.4	-64.4	6.5	0.00	0.00	0.00
3,600.0	12.29	352.25	3,548.6	494.5	-67.3	6.8	0.00	0.00	0.00
3,700.0	12.29	352.25	3,646.3	515.6	-70.2	7.0	0.00	0.00	0.00
3,800.0	12.29	352.25	3,744.0	536.7	-73.1	7.3	0.00	0.00	0.00
3,900.0	12.29	352.25	3,841.7	557.8	-75.9	7.6	0.00	0.00	0.00
4,000.0	12.29	352.25	3,939.5	578.9	-78.8	7.9	0.00	0.00	0.00
4,100.0	12.29	352.25	4,037.2	600.0	-81.7	8.2	0.00	0.00	0.00
4,200.0	12.29	352.25	4,134.9	621.1	-84.5	8.5	0.00	0.00	0.00
4,300.0	12.29	352.25	4,232.6	642.2	-87.4	8.8	0.00	0.00	0.00
4,400.0	12.29	352.25	4,330.3	663.3	-90.3	9.1	0.00	0.00	0.00
4,500.0	12.29	352.25	4,428.0	684.3	-93.2	9.3	0.00	0.00	0.00
4,600.0	12.29	352.25	4,426.0	705.4	-93.2 -96.0	9.6	0.00	0.00	0.00
4,700.0	12.29	352.25	4,623.4	705.4 726.5	-98.9	9.9	0.00	0.00	0.00
4,800.0 4,900.0	12.29 12.29	352.25 352.25	4,721.1 4,818.8	747.6 768.7	-101.8 -104.6	10.2 10.5	0.00 0.00	0.00 0.00	0.00 0.00
5,000.0	12.29	352.25 352.25	4,616.6 4,916.5	789.8	-104.6 -107.5	10.5	0.00	0.00	0.00

Database: Company: Hobbs

Mewbourne Oil Company

Project: Eddy County, New Mexico NAD 83
Site: Eddy County, New Mexico NAD 83
Rio Grande 2/1 B3DA State Com #1H

Well: Sec 2, T19S, R28E

Wellbore: BHL: 660

Design: Design #1

BHL: 660' FNL & 100' FEL, Sec 1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

**Survey Calculation Method:** 

Site Rio Grande 2/1 B3DA State Com #1H WELL @ 3503.0usft (Original Well Elev) WELL @ 3503.0usft (Original Well Elev)

Grid

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,100.0 5,200.0	12.29 12.29	352.25 352.25	5,014.2 5,111.9	810.9 832.0	-110.4 -113.3	11.1 11.4	0.00 0.00	0.00 0.00	0.00 0.00
5,300.0	12.29	352.25	5,209.6	853.1	-116.1	11.6	0.00	0.00	0.00
5,400.0 5,500.0	12.29 12.29	352.25 352.25	5,307.4 5,405.1	874.2 895.3	-119.0 -121.9	11.9 12.2	0.00 0.00	0.00 0.00	0.00 0.00
5,600.0	12.29	352.25	5,502.8	916.4	-124.7	12.5	0.00	0.00	0.00
5,700.0	12.29	352.25	5,600.5	937.5	-127.6	12.8	0.00	0.00	0.00
5,800.0	12.29	352.25	5,698.2	958.6	-130.5	13.1	0.00	0.00	0.00
5,900.0	12.29	352.25	5,795.9	979.7	-133.4	13.4	0.00	0.00	0.00
6,000.0	12.29	352.25	5,893.6	1,000.8	-136.2	13.7	0.00	0.00	0.00
6,100.0	12.29	352.25	5,991.3	1,021.9	-139.1	14.0	0.00	0.00	0.00
6,200.0	12.29	352.25	6,089.0	1,043.0	-142.0	14.2	0.00	0.00	0.00
6,300.0	12.29	352.25	6,186.7	1,064.1	-144.8	14.5	0.00	0.00	0.00
6,400.0 6,500.0	12.29 12.29	352.25 352.25	6,284.4 6,382.1	1,085.2	-147.7	14.8	0.00 0.00	0.00 0.00	0.00 0.00
6,600.0	12.29	352.25 352.25	6,382.1	1,106.3 1,127.4	-150.6 -153.5	15.1			
6,700.0	12.29	352.25 352.25	6,479.8 6,577.5	1,127.4	-153.5 -156.3	15.4 15.7	0.00 0.00	0.00 0.00	0.00 0.00
6,800.0	12.29	352.25	6,675.3	1,169.6	-159.2	16.0	0.00	0.00	0.00
6,900.0	12.29	352.25	6,773.0	1,190.7	-162.1	16.3	0.00	0.00	0.00
7,000.0	12.29	352.25	6,870.7	1,211.8	-164.9	16.5	0.00	0.00	0.00
7,100.0	12.29	352.25	6,968.4 7,066.1	1,232.9	-167.8	16.8	0.00	0.00	0.00
7,200.0	12.29	352.25	7,000.1	1,254.0	-170.7	17.1	0.00	0.00	0.00
7,300.0	12.29	352.25	7,163.8	1,275.1	-173.6	17.4	0.00	0.00	0.00
7,400.0	12.29	352.25	7,261.5	1,296.2	-176.4	17.7	0.00	0.00	0.00
7,473.3	12.29	352.25	7,333.1	1,311.6	-178.5	17.9	0.00	0.00	0.00
7,500.0	11.76	352.25	7,359.2	1,317.1	-179.3	18.0	2.00	-2.00	0.00
7,600.0	9.76	352.25	7,457.5	1,335.6	-181.8	18.2	2.00	-2.00	0.00
7,700.0	7.76	352.25	7,556.3	1,350.7	-183.9	18.4	2.00	-2.00	0.00
7,800.0	5.76	352.25	7,655.6	1,362.4	-185.5	18.6	2.00	-2.00	0.00
7,900.0	3.76	352.25	7,755.2	1,370.6	-186.6	18.7	2.00	-2.00	0.00
8,000.0	1.76	352.25	7,855.1	1,375.4	-187.2	18.8	2.00	-2.00	0.00
8,087.9	0.00	0.00	7,943.0	1,376.7	-187.4	18.8	2.00	-2.00	0.00
KOP: 660' F	NL & 10' FWL (2	)							
8,100.0	1.21	89.26	7,955.1	1,376.7	-187.3	18.9	10.00	10.00	0.00
8,150.0	6.21	89.26	8,005.0	1,376.7	-184.0	22.1	10.00	10.00	0.00
8,200.0	11.21	89.26	8,054.4	1,376.8	-176.5	29.6	10.00	10.00	0.00
8,250.0	16.21	89.26	8,103.0	1,377.0	-164.6	41.4 57.2	10.00	10.00	0.00
8,300.0	21.21	89.26	8,150.3	1,377.2	-148.6	57.2	10.00	10.00	0.00
8,350.0	26.21	89.26	8,196.1	1,377.5	-128.5	77.2	10.00	10.00	0.00
8,400.0	31.21	89.26	8,239.9	1,377.8	-104.5	100.9	10.00	10.00	0.00
8,413.8	32.59 NL & 100' FWL (2	89.26	8,251.6	1,377.9	-97.2	108.2	10.00	10.00	0.00
8,450.0	36.21	89.26	8,281.5	1,378.1	-76.8	128.4	10.00	10.00	0.00
8,500.0	41.21	89.26	8,320.5	1,378.5	-45.5	159.4	10.00	10.00	0.00
8,550.0	46.21	89.26	8,356.6	1,379.0	-11.0	193.6	10.00	10.00	0.00
8,600.0	51.21	89.26	8,389.6	1,379.5	26.6	230.8	10.00	10.00	0.00
8,650.0	56.21	89.26	8,419.2	1,380.0	66.9	270.7	10.00	10.00	0.00
8,700.0	61.21	89.26	8,445.2	1,380.5	109.6	313.0	10.00	10.00	0.00
8,750.0	66.21	89.26	8,467.3	1,381.1	154.4	357.4	10.00	10.00	0.00
8,800.0	71.20	89.26	8,485.5	1,381.7	200.9	403.6	10.00	10.00	0.00
8,850.0	76.20	89.26	8,499.5	1,382.3	248.9	451.1	10.00	10.00	0.00
8,900.0	81.20	89.26	8,509.3	1,383.0	297.9	499.7	10.00	10.00	0.00
8,950.0	86.20	89.26	8,514.8	1,383.6	347.6	548.9	10.00	10.00	0.00
8,983.7	89.58	89.26	8,516.0	1,384.0	381.3	582.3	10.00	10.00	0.00

Hobbs Database: Company:

Project:

Site:

Mewbourne Oil Company

Eddy County, New Mexico NAD 83 Rio Grande 2/1 B3DA State Com #1H

Well: Sec 2, T19S, R28E

BHL: 660' FNL & 100' FEL, Sec 1 Wellbore: Design: Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

**Survey Calculation Method:** 

Site Rio Grande 2/1 B3DA State Com #1H WELL @ 3503.0usft (Original Well Elev) WELL @ 3503.0usft (Original Well Elev)

ed Survey												
Managed			Vantiaal			Vantinal	Dawlass	Dild	T			
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)			
LP: 660' FNL & 579' FWL (2)												
	. ,											
9,000.0	89.58	89.26	8,516.1	1,384.2	397.6	598.4	0.02	0.02	0.00			
9,100.0	89.58	89.26	8,516.9	1,385.5	497.6	697.5	0.00	0.00	0.00			
9,200.0	89.58	89.26	8,517.6	1,386.8	597.5	796.6	0.00	0.00	0.00			
9,300.0	89.58	89.26	8,518.3	1,388.1	697.5 797.5	895.6 994.7	0.00	0.00	0.00			
9,400.0	89.58	89.26	8,519.1	1,389.4	191.5	994.7	0.00	0.00	0.00			
9,500.0	89.58	89.26	8,519.8	1,390.7	897.5	1,093.8	0.00	0.00	0.00			
9,600.0	89.58	89.26	8,520.5	1,392.0	997.5	1,192.9	0.00	0.00	0.00			
9,700.0	89.58	89.26	8,521.3	1,393.3	1,097.5	1,291.9	0.00	0.00	0.00			
9,800.0	89.58	89.26	8,522.0	1,394.5	1,197.5	1,391.0	0.00	0.00	0.00			
9,900.0	89.58	89.26	8,522.7	1,395.8	1,297.5	1,490.1	0.00	0.00	0.00			
10,000.0	89.58	89.26	8,523.5	1,397.1	1,397.5	1,589.2	0.00	0.00	0.00			
10,100.0	89.58	89.26	8,524.2	1,398.4	1,497.4	1,688.2	0.00	0.00	0.00			
10,200.0	89.58	89.26	8,524.9	1,399.7	1,597.4	1,787.3	0.00	0.00	0.00			
10,300.0	89.58	89.26	8,525.7	1,401.0	1,697.4	1,886.4	0.00	0.00	0.00			
10,400.0	89.58	89.26	8,526.4	1,402.3	1,797.4	1,985.5	0.00	0.00	0.00			
10,500.0	89.58	89.26	8,527.1	1,403.6	1,897.4	2,084.5	0.00	0.00	0.00			
10,600.0	89.58	89.26	8,527.9	1,404.9	1,997.4	2,183.6	0.00	0.00	0.00			
10,700.0	89.58	89.26	8,528.6	1,406.1	2,097.4	2,282.7	0.00	0.00	0.00			
10,800.0	89.58	89.26	8,529.3	1,407.4	2,197.4	2,381.8	0.00	0.00	0.00			
10,900.0	89.58	89.26	8,530.1	1,408.7	2,297.4	2,480.8	0.00	0.00	0.00			
11,000.0	89.58	89.26	8,530.8	1,410.0	2,397.4	2,579.9	0.00	0.00	0.00			
11,100.0	89.58	89.26	8,531.5	1,411.3	2,497.3	2,679.0	0.00	0.00	0.00			
11,200.0	89.58	89.26	8,532.3	1,412.6	2,597.3	2,778.1	0.00	0.00	0.00			
11,300.0	89.58	89.26	8,533.0	1,413.9	2,697.3	2,877.1	0.00	0.00	0.00			
11,400.0	89.58	89.26	8,533.7	1,415.2	2,797.3	2,976.2	0.00	0.00	0.00			
11,500.0	89.58	89.26	8,534.5	1,416.5	2,897.3	3,075.3	0.00	0.00	0.00			
11,600.0	89.58	89.26	8,535.2	1,417.7	2,997.3	3,174.4	0.00	0.00	0.00			
11,700.0	89.58	89.26	8,535.9	1,419.0	3,097.3	3,273.4	0.00	0.00	0.00			
11,800.0	89.58	89.26	8,536.6	1,420.3	3,197.3	3,372.5	0.00	0.00	0.00			
11,900.0	89.58	89.26	8,537.4	1,421.6	3,297.3	3,471.6	0.00	0.00	0.00			
12,000.0	89.58	89.26	8,538.1	1,422.9	3,397.2	3,570.7	0.00	0.00	0.00			
12,100.0	89.58	89.26	8,538.8	1,424.2	3,497.2	3,669.7	0.00	0.00	0.00			
12,200.0	89.58	89.26	8,539.6	1,425.5	3,597.2	3,768.8	0.00	0.00	0.00			
12,300.0	89.58	89.26	8,540.3	1,426.8	3,697.2	3,867.9	0.00	0.00	0.00			
12,400.0	89.58	89.26	8,541.0	1,428.0	3,797.2	3,967.0	0.00	0.00	0.00			
12,500.0	89.58	89.26	8,541.8	1,429.3	3,897.2	4,066.0	0.00	0.00	0.00			
12,600.0	89.58	89.26	8,542.5	1,430.6	3,997.2	4.165.1	0.00	0.00	0.00			
12,700.0	89.58	89.26	8,543.2	1,431.9	4,097.2	4,264.2	0.00	0.00	0.00			
12,800.0	89.58	89.26	8,544.0	1,433.2	4,197.2	4,363.3	0.00	0.00	0.00			
12,900.0	89.58	89.26	8,544.7	1,434.5	4,297.1	4,462.3	0.00	0.00	0.00			
13,000.0	89.58	89.26	8,545.4	1,435.8	4,397.1	4,561.4	0.00	0.00	0.00			
13,100.0	89.58	89.26	8,546.2	1,437.1	4,497.1	4,660.5	0.00	0.00	0.00			
13,200.0	89.58	89.26	8,546.9	1,438.4	4,597.1	4,759.6	0.00	0.00	0.00			
13,300.0	89.58	89.26	8,547.6	1,439.6	4,697.1	4,858.6	0.00	0.00	0.00			
13,400.0	89.58	89.26	8,548.4	1,440.9	4,797.1	4,957.7	0.00	0.00	0.00			
13,500.0	89.58	89.26	8,549.1	1,442.2	4,897.1	5,056.8	0.00	0.00	0.00			
13,600.0	89.58	89.26	8,549.8	1,442.2	4,097.1	5,056.6	0.00	0.00	0.00			
13,700.0	89.58	89.26	8,550.6	1,444.8	5,097.1	5,254.9	0.00	0.00	0.00			
13,800.0	89.58	89.26	8,551.3	1,446.1	5,197.0	5,354.0	0.00	0.00	0.00			
13,900.0	89.58	89.26	8,552.0	1,447.4	5,297.0	5,453.1	0.00	0.00	0.00			
		89.26			,		0.00	0.00	0.00			
14,000.0	89.58 89.58	89.26 89.26	8,552.8 8,553.5	1,448.7 1,450.0	5,397.0 5,497.0	5,552.2 5,651.2	0.00	0.00	0.00			

Database: Company: Hobbs

Mewbourne Oil Company

Project: Eddy County, New Mexico NAD 83
Site: Eddy County, New Mexico NAD 83
Rio Grande 2/1 B3DA State Com #1H

Well: Sec 2, T19S, R28E

Wellbore: BHL: 660' FNL & 100' FEL, Sec 1

Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

**Survey Calculation Method:** 

Site Rio Grande 2/1 B3DA State Com #1H WELL @ 3503.0usft (Original Well Elev) WELL @ 3503.0usft (Original Well Elev)

Grid

nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
` '			` '	, ,		, ,	, ,	, ,	,
14,200.0	89.58	89.26	8,554.2	1,451.2	5,597.0	5,750.3	0.00	0.00	0.00
14,300.0	89.58	89.26	8,555.0	1,452.5	5,697.0	5,849.4	0.00	0.00	0.00
14,400.0	89.58	89.26	8,555.7	1,453.8	5,797.0	5,948.5	0.00	0.00	0.00
14,500.0	89.58	89.26	8,556.4	1,455.1	5,897.0	6,047.5	0.00	0.00	0.00
14,600.0	89.58	89.26	8,557.2	1,456.4	5,997.0	6,146.6	0.00	0.00	0.00
14,700.0	89.58	89.26	8,557.9	1,457.7	6,096.9	6,245.7	0.00	0.00	0.00
14,800.0	89.58	89.26	8,558.6	1,459.0	6,196.9	6,344.8	0.00	0.00	0.00
14,900.0	89.58	89.26	8,559.4	1,460.3	6,296.9	6,443.8	0.00	0.00	0.00
15,000.0	89.58	89.26	8,560.1	1,461.6	6,396.9	6,542.9	0.00	0.00	0.00
15,100.0	89.58	89.26	8,560.8	1,462.8	6,496.9	6,642.0	0.00	0.00	0.00
15,200.0	89.58	89.26	8,561.6	1,464.1	6,596.9	6,741.1	0.00	0.00	0.00
15,300.0	89.58	89.26	8,562.3	1,465.4	6,696.9	6,840.1	0.00	0.00	0.00
15,400.0	89.58	89.26	8,563.0	1,466.7	6,796.9	6,939.2	0.00	0.00	0.00
15,500.0	89.58	89.26	8,563.8	1,468.0	6,896.9	7,038.3	0.00	0.00	0.00
15,600.0	89.58	89.26	8,564.5	1,469.3	6,996.8	7,137.4	0.00	0.00	0.00
15,700.0	89.58	89.26	8,565.2	1,470.6	7,096.8	7,236.4	0.00	0.00	0.00
15,800.0	89.58	89.26	8,566.0	1,471.9	7,196.8	7,335.5	0.00	0.00	0.00
15,900.0	89.58	89.26	8,566.7	1,473.1	7,296.8	7,434.6	0.00	0.00	0.00
16,000.0	89.58	89.26	8,567.4	1,474.4	7,396.8	7,533.7	0.00	0.00	0.00
16,100.0	89.58	89.26	8,568.2	1,475.7	7,390.8	7,632.7	0.00	0.00	0.00
		89.26				7,731.8			
16,200.0	89.58		8,568.9	1,477.0	7,596.8		0.00	0.00	0.00
16,300.0 16,400.0	89.58 89.58	89.26 89.26	8,569.6 8,570.4	1,478.3 1,479.6	7,696.8 7,796.8	7,830.9 7,930.0	0.00 0.00	0.00 0.00	0.00 0.00
10,400.0		69.20	0,570.4	1,479.0	7,790.0	7,930.0		0.00	
16,500.0	89.58	89.26	8,571.1	1,480.9	7,896.7	8,029.0	0.00	0.00	0.00
16,600.0	89.58	89.26	8,571.8	1,482.2	7,996.7	8,128.1	0.00	0.00	0.00
16,700.0	89.58	89.26	8,572.6	1,483.5	8,096.7	8,227.2	0.00	0.00	0.00
16,800.0	89.58	89.26	8,573.3	1,484.7	8,196.7	8,326.3	0.00	0.00	0.00
16,900.0	89.58	89.26	8,574.0	1,486.0	8,296.7	8,425.3	0.00	0.00	0.00
17,000.0	89.58	89.26	8,574.8	1,487.3	8,396.7	8,524.4	0.00	0.00	0.00
17,100.0	89.58	89.26	8,575.5	1,488.6	8,496.7	8,623.5	0.00	0.00	0.00
17,100.0	89.58	89.26	8,576.2	1,489.9	8,596.7	8,722.6	0.00	0.00	0.00
17,300.0	89.58	89.26	8,577.0	1,491.2	8,696.7	8,821.6	0.00	0.00	0.00
17,400.0	89.58	89.26	8,577.7	1,492.5	8,796.6	8,920.7	0.00	0.00	0.00
17,500.0	89.58	89.26	8,578.4	1,493.8	8,896.6	9,019.8	0.00	0.00	0.00
17,600.0	89.58	89.26	8,579.2	1,495.1	8,996.6	9,118.9	0.00	0.00	0.00
17,700.0	89.58	89.26	8,579.9	1,496.3	9,096.6	9,217.9	0.00	0.00	0.00
17,800.0	89.58	89.26	8,580.6	1,497.6	9,196.6	9,317.0	0.00	0.00	0.00
17,900.0	89.58	89.26	8,581.4	1,498.9	9,296.6	9,416.1	0.00	0.00	0.00
18,000.0	89.58	89.26	8,582.1	1,500.2	9,396.6	9,515.2	0.00	0.00	0.00
18,100.0	89.58	89.26	8,582.8	1,501.5	9,496.6	9,614.2	0.00	0.00	0.00
18,200.0	89.58	89.26	8,583.6	1,502.8	9,596.6	9,713.3	0.00	0.00	0.00
18,300.0	89.58	89.26	8,584.3	1,504.1	9,696.5	9,812.4	0.00	0.00	0.00
18,400.0	89.58	89.26	8,585.0	1,505.4	9,796.5	9,911.5	0.00	0.00	0.00
18,500.0	89.58	89.26	8,585.8	1,506.7	9,896.5	10,010.5	0.00	0.00	0.00
18,600.0	89.58	89.26	8,586.5	1,507.9	9,996.5	10,109.6	0.00	0.00	0.00
18,666.8	89.58	89.26	8,587.0	1,508.8	10,063.3	10,175.8	0.00	0.00	0.00

Hobbs Database: Company:

Mewbourne Oil Company

Eddy County, New Mexico NAD 83 Rio Grande 2/1 B3DA State Com #1H

Well:

Project:

Site:

Wellbore: Design:

Sec 2, T19S, R28E

BHL: 660' FNL & 100' FEL, Sec 1 Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

**Survey Calculation Method:** 

Site Rio Grande 2/1 B3DA State Com #1H WELL @ 3503.0usft (Original Well Elev) WELL @ 3503.0usft (Original Well Elev)

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL: 2040' FNL & 210' - plan hits target co - Point		0.00	0.0	0.0	0.0	615,347.30	596,215.40	32.6915061	-104.1549494
KOP: 660' FNL & 10' F - plan hits target co - Point		0.00	7,943.0	1,376.7	-187.4	616,724.00	596,028.00	32.6952911	-104.1555510
FTP: 660' FNL & 100' - plan hits target ce - Point		0.00	8,251.6	1,377.9	-97.2	616,725.17	596,118.20	32.6952939	-104.1552578
LP: 660' FNL & 579' FV - plan hits target co - Point		0.00	8,516.0	1,384.0	381.3	616,731.33	596,596.70	32.6953086	-104.1537023
BHL: 660' FNL & 100' - plan hits target co - Point		0.00	8,587.0	1,508.8	10,063.3	616,856.10	606,278.70	32.6956026	-104.1222284