

Submit a Copy To Appropriate District
Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-12358
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name WEST DOLLARHIDE DEVONIAN UNIT
8. Well Number 113
9. OGRID Number 16696
10. Pool name or Wildcat DOLLARHIDE; DEVONIAN

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	
2. Name of Operator OXY USA INC. (16696)	
3. Address of Operator PO BOX 4294, HOUSTON, TX 77210	
4. Well Location Unit Letter <u>C</u> : <u>667</u> feet from the <u>NORTH</u> line and <u>1859</u> feet from the <u>WEST</u> line Section _____ Township _____ Range _____ NMPM _____ County _____	
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please find attached the PxA procedure performed and final wellbore diagram.

APPROVED

Reclamation Due
4/14/24

Spud Date:

3/9/23

Rig Release Date:

3/22/23

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Roni Mathew TITLE REGULATORY ADVISOR DATE 4/5/2023

Type or print name RONI MATHEW E-mail address: RONI_MATHEW@OXY.COM PHONE: 713-215-7827
For State Use Only

APPROVED BY: [Signature] TITLE Petroleum Specialist DATE 04/14/2023
Conditions of Approval (if any): [Signature]

Date	Sundry Requirements	Actual	Bottom	Top	Tag	Daily Report
3/9 - 3/14/23	1) CIBP/ EXISTING	CIBP	7690'		7646'	TEST PKR 7680' TEST GOOD AND TESTED ABOVE PKR TO SURFACE 500 PSI GOOD.
3/15 - 3/20/23	ADD 2) SPOT 7360'-7260'	EOT @ 7360' (TOP OF WOLFCAMP)	7360'	7260'	N/T	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 41.2 BBLS OF GEL-BRINE.
3/21/2023	ADD 3) SPOT 6667'-6567'	EOT @ 6672' (ABO)	6672'	6567'	N/T	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 37.2 BBLS OF GEL-BRINE.
3/21/2023	4) SPOT 6100'-5950'	EOT @ 6117' (TUBB)	6117'	5950'	5852'	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 34 BBLS OF GEL-BRINE.
3/21/2023	5) SPOT 5272'-5100'	EOT @ 5272' (GLORIETA)	5272'	5100'	5019'	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 29 BBLS OF GEL-BRINE.
3/21/2023	6) SPOT 4139'-3950'	EOT @ 4140 (SAN ANDRES)	4140'	3950"	3880'	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 22.5 BBLS OF GEL-BRINE.
3/22/2023	7) SPOT 2950'-2800'	EOT @ 2962' (CSG SHOE)	2962'	2800'	2695'	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 15.7 BBLS OF GEL-BRINE.
3/22/2023	8) SPOT 1100'-1000'	EOT @ 1111' (FRESH WATER ZONE)	1111'	1000'	880'	SPOT 40 SX CLASS C CMT, 9.4 BBLS, 14.8#, 1.32 YIELD, 2% CALCIUM, COVERING 246', DISPLACE WITH 5 BBLS OF GEL-BRINE.
3/22/2023	9) PERF @ 300'	PKR @ 78' SURFACE	350'	SURFACE		RIG UP WIRELINE RAN IN SHOT HOLES @ 300', PRESSURE UP TO 500 PSI, HELD GOOD
						THEN SPOT HOLES @ 150', PRESSURE UP TO 500 PSI, HELD GOOD. PICK UP 8 JTS
						PUTTING EOT @ 352', CIRCULATED 60 SX CLASS C CMT, 14.1 BBLS, 1.32 YIELD.



West Dollarhide Unit 113

API#: 30-025-12358

667 FNL x 781 FEL x Section 4 x Township 25S x Range 38E x LEA NM

LAT: +32.16468157, LONG: -103.0667261

DRILLED & COMPLETED: 1952

CURRENT WELLBORE

Sqz and circ plug from 350' to surface
Pump 60 sxs CL C cement
Circulate to surface

Set plug 1111'-1000'
Spot 40 sxs CL C cement
Tag TOC at 880'

Set plug 2962'-2800'
Spot 40 sxs CL C cement
Tag TOC at 2695'


Set Plug from 4140'-3950'
Spot 40 sxs CL C cement
Tag TOC at 3880'

Set Plug 5272'-5100'
Spot 40 sxs CL C cement
Tag TOC at 5019'

Set Plug 6117'-5950'
Spot 40 sxs CL C cement
Tag TOC at 5852'

Set Plug 6672'-6567'
Spot 40 sxs CL C cement

Set Plug 7360'-7260'
Spot 40 sxs CL C cement

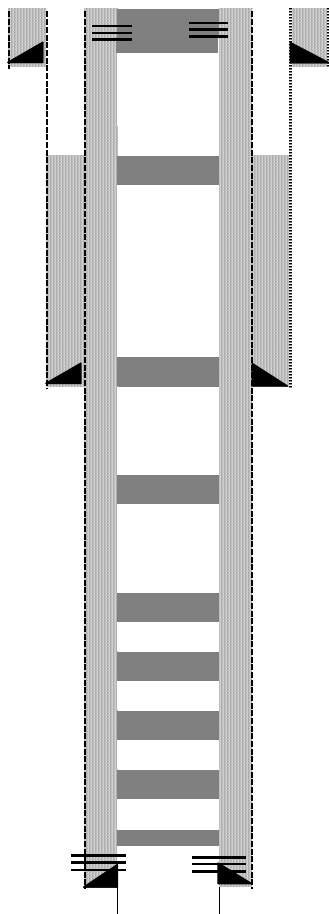

Surface Casing

276' 13.375" H-40 48#
Cemented with 325 sxs
TOC at surface (circulated)

Intermediate Casing

2,899' 9.625" H-40 and J-55 32 & 36#
Cemented with 1850 sxs
TOC at 1185' (temp survey)

Production Casing

7,756' 7.000" N-80 and J-55 23 & 26#
Cemented with 650 sxs
TOC at 5478' (temp survey)
Perforated at 5375', squeezed 800 sxs
TOC at surface (circulated)

Perforations / Open Hole

7739' to 7754' perforations
7751' to 7965' open hole

7,690' CIBP with 10 sxs of cement

7,942' PBTD

7,965' TD

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 204605

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 204605
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
john.harrison	None	4/14/2023