

**District I**

1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**

811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**

1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form C-101

August 1, 2011

Permit 353371

**APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE**

1. Operator Name and Address Avant Operating, LLC 1515 Wynkoop Street Denver, CO 80202		2. OGRID Number 330396
		3. API Number 30-025-52201
4. Property Code 334829	5. Property Name EXPLORER 15 STATE COM	6. Well No. 303H

**7. Surface Location**

UL - Lot B	Section 15	Township 18S	Range 34E	Lot Idn B	Feet From 431	N/S Line N	Feet From 1319	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	-------------------	---------------	---------------

**8. Proposed Bottom Hole Location**

UL - Lot P	Section 22	Township 18S	Range 34E	Lot Idn P	Feet From 100	N/S Line S	Feet From 330	E/W Line E	County Lea
---------------	---------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

**9. Pool Information**

AIRSTIP:BONE SPRING	960
AIRSTIP:BONE SPRING, NORTH	962

**Additional Well Information**

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 4018
16. Multiple Y	17. Proposed Depth 18762	18. Formation 1st Bone Spring Sand	19. Contractor	20. Spud Date 5/30/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☒ We will be using a closed-loop system in lieu of lined pits

**21. Proposed Casing and Cement Program**

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1805	1045	1440
Int1	12.25	9.625	40	3400	890	2720
Prod	8.75	5.5	20	18762	3475	8075

**Casing/Cement Program: Additional Comments**

--

**22. Proposed Blowout Prevention Program**

Type	Working Pressure	Test Pressure	Manufacturer
Pipe	10000	5000	Cameron

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC <input checked="" type="checkbox"/> and/or 19.15.14.9 (B) NMAC <input checked="" type="checkbox"/> if applicable.	<b>OIL CONSERVATION DIVISION</b>	
Signature:		
Printed Name: Electronically filed by Sarah Ferreyros	Approved By: Paul F Kautz	
Title: Director of Regulatory	Title: Geologist	
Email Address: sarah@avantnr.com	Approved Date: 11/14/2023	Expiration Date: 11/14/2025
Date: 11/10/2023	Phone: 720-854-9020	Conditions of Approval Attached

District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office  
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number		Pool Code	Pool Name
		960	Airstrip; Bone Spring
Property Code	Property Name		Well Number
	EXPLORER 15 STATE COM		#303H
OGRID No.	Operator Name		Elevation
330396	AVANT OPERATING, LLC		4018'

Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	15	18 S	34 E		431	NORTH	1319	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	22	18 S	34 E		100	SOUTH	330	EAST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
320.00			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

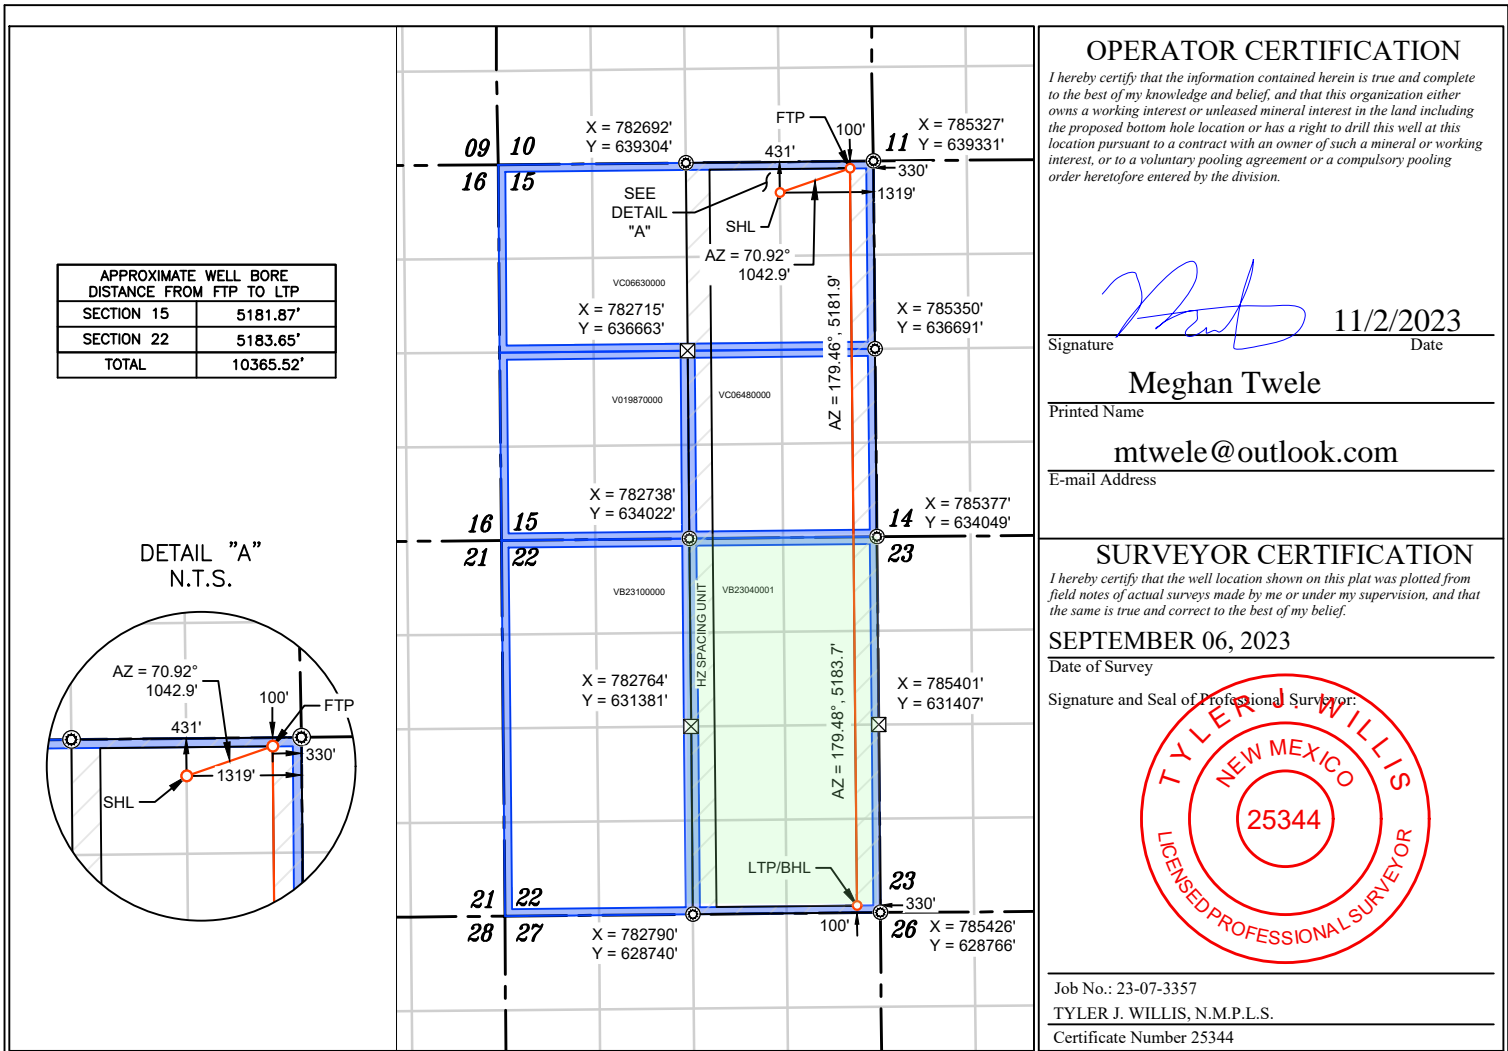

NAD 83 (SHL) 431' FNL & 1319' FEL
LATITUDE = 32.753849°
LONGITUDE = -103.543964°
NAD 27 (SURFACE HOLE LOCATION)
LATITUDE = 32.753725°
LONGITUDE = -103.543467°
STATE PLANE NAD 83 (N.M. EAST)
N: 638886.56' E: 784012.51'
STATE PLANE NAD 27 (N.M. EAST)
N: 638821.88' E: 742833.35'


NAD 83 (FTP) 100' FNL & 330' FEL
LATITUDE = 32.754766°
LONGITUDE = -103.540750°
NAD 27 (FTP)
LATITUDE = 32.754642°
LONGITUDE = -103.540253°
STATE PLANE NAD 83 (N.M. EAST)
N: 639227.53' E: 784998.09'
STATE PLANE NAD 27 (N.M. EAST)
N: 639162.83' E: 743818.93'

NAD 83 (LTP/BHL) 100' FSL & 330' FEL
LATITUDE = 32.726276°
LONGITUDE = -103.540689°
NAD 27 (LTP/BHL)
LATITUDE = 32.726152°
LONGITUDE = -103.540193°
STATE PLANE NAD 83 (N.M. EAST)
N: 628862.46' E: 785094.66'
STATE PLANE NAD 27 (N.M. EAST)
N: 628798.07' E: 743915.22'

- © FND. U.S.G.L.O. MON. UNLESS OTHERWISE NOTED
- ☒ CALC. CORNER
- SHL/ KOP/ FTP/ PPP/ LTP / BHL
- OIL & GAS LEASE
- HORIZONTAL SPACING UNIT

NOTES

- ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001), NAVD 88.
- THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING SEPTEMBER, 2023. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS EASEMENT IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.



District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office  
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number		Pool Code	Pool Name
		962	Airstrip; Bone Spring, North
Property Code	Property Name		Well Number
	EXPLORER 15 STATE COM		#303H
OGRID No.	Operator Name		Elevation
330396	AVANT OPERATING, LLC		4018'

Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	15	18 S	34 E		431	NORTH	1319	EAST	LEA

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	22	18 S	34 E		100	SOUTH	330	EAST	LEA

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
320.00			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

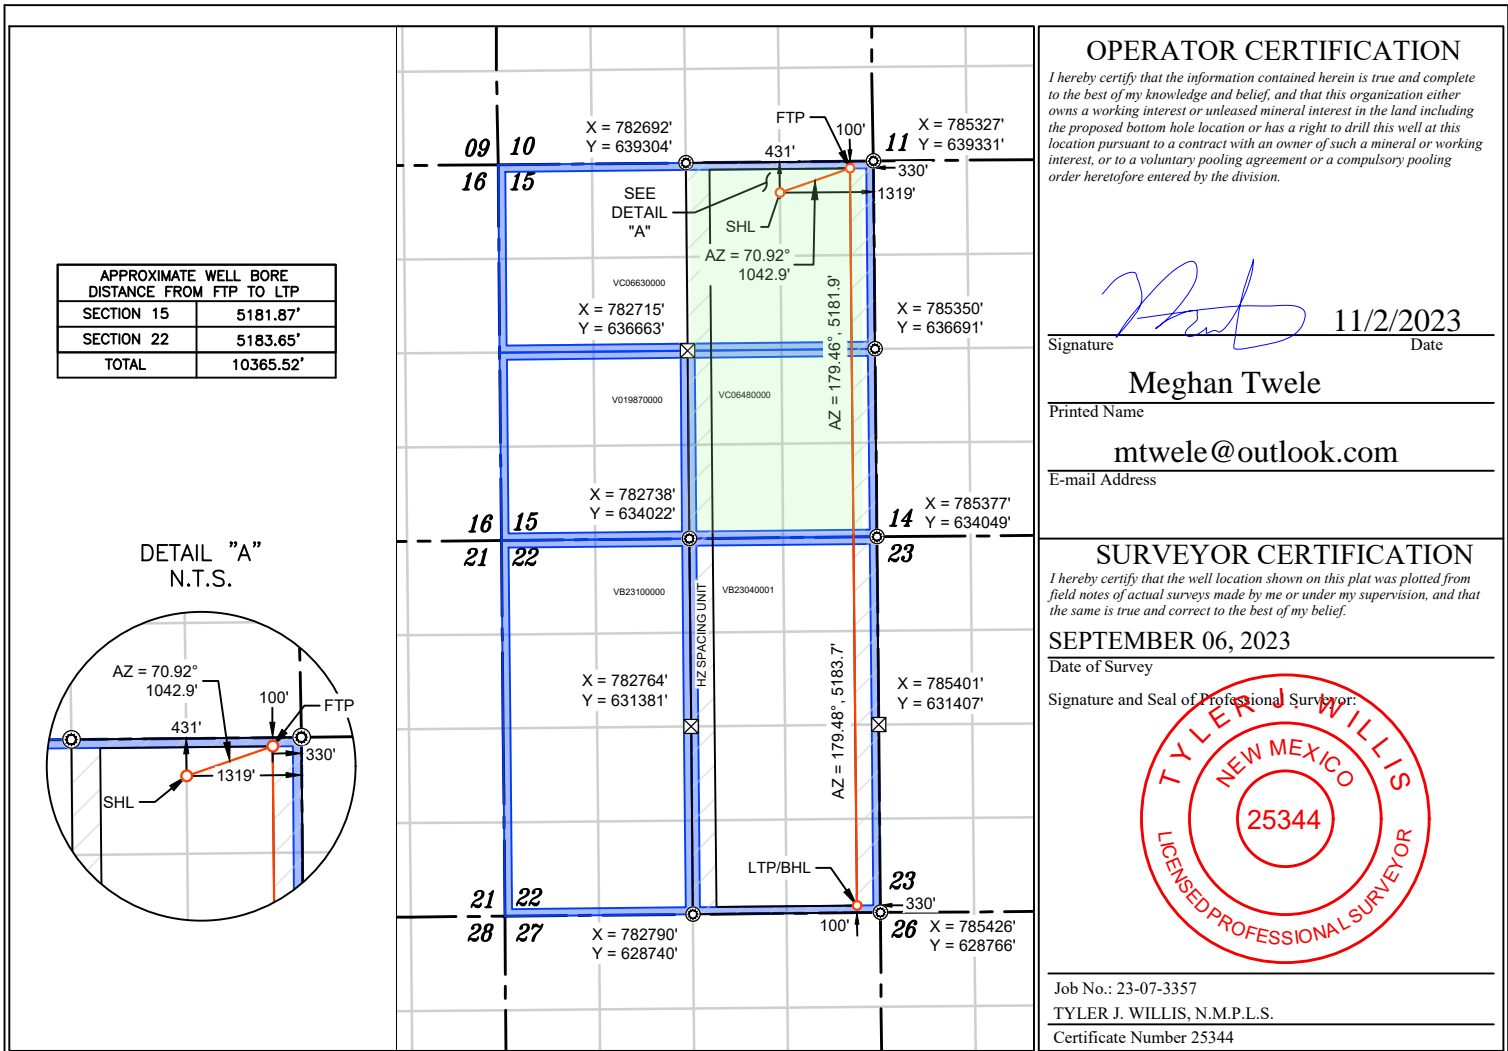

NAD 83 (SHL) 431' FNL & 1319' FEL
LATITUDE = 32.753849°
LONGITUDE = -103.543964°
NAD 27 (SURFACE HOLE LOCATION)
LATITUDE = 32.753725°
LONGITUDE = -103.543467°
STATE PLANE NAD 83 (N.M. EAST)
N: 638886.56' E: 784012.51'
STATE PLANE NAD 27 (N.M. EAST)
N: 638821.88' E: 742833.35'


NAD 83 (FTP) 100' FNL & 330' FEL
LATITUDE = 32.754766°
LONGITUDE = -103.540750°
NAD 27 (FTP)
LATITUDE = 32.754642°
LONGITUDE = -103.540253°
STATE PLANE NAD 83 (N.M. EAST)
N: 639227.53' E: 784998.09'
STATE PLANE NAD 27 (N.M. EAST)
N: 639162.83' E: 743818.93'

NAD 83 (LTP/BHL) 100' FSL & 330' FEL
LATITUDE = 32.726276°
LONGITUDE = -103.540689°
NAD 27 (LTP/BHL)
LATITUDE = 32.726152°
LONGITUDE = -103.540193°
STATE PLANE NAD 83 (N.M. EAST)
N: 628862.46' E: 785094.66'
STATE PLANE NAD 27 (N.M. EAST)
N: 628798.07' E: 743915.22'

- © FND. U.S.G.L.O. MON. UNLESS OTHERWISE NOTED
- ☒ CALC. CORNER
- SHL/ KOP/ FTP/ PPP/ LTP / BHL
- OIL & GAS LEASE
- HORIZONTAL SPACING UNIT

NOTES

- ALL COORDINATES, BEARINGS, AND DISTANCES CONTAINED HEREIN ARE GRID, BASED UPON THE NEW MEXICO STATE PLANE COORDINATES SYSTEM, NORTH AMERICAN DATUM 83, NEW MEXICO EAST (3001), NAVD 88.
- THIS DOCUMENT IS BASED UPON AN ON THE GROUND SURVEY PERFORMED DURING SEPTEMBER, 2023. CERTIFICATION OF THIS DOCUMENT IS ONLY TO THE LOCATION OF THIS EASEMENT IN RELATION TO RECORDED MONUMENT OF DEEDS PROVIDED BY THE CLIENT.
- ELEVATIONS MSL, DERIVED FROM G.N.S.S. OBSERVATION AND DERIVED FROM SAID ON-THE-GROUND SURVEY.



SCALE: 1" = 2500'

**District I**

1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**

811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**

1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

Form APD Conditions

Permit 353371

**PERMIT CONDITIONS OF APPROVAL**

Operator Name and Address: Avant Operating, LLC [330396] 1515 Wynkoop Street Denver, CO 80202	API Number: 30-025-52201
	Well: EXPLORER 15 STATE COM #303H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string , a CBL is required for that string of casing.
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud



State of New Mexico  
Energy, Minerals and Natural Resources Department

Submit Electronically  
Via E-permitting

Oil Conservation Division  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

## NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

### Section 1 – Plan Description

Effective May 25, 2021

**I. Operator:** Avant Operating, LLC    **OGRID:** 330396    **Date:** 11/08/2023

**II. Type:** ☒ Original   ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: \_\_\_\_\_

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Explorer 15 State Com 006H		B-15-T18S-R34E	271FNL/1357FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 007H		B-15-T18S-R34E	271FNL/1337FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 008H		A-15-T18S-R34E	271FNL/1317FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 301H		B-15-T18S-R34E	431FNL/1359FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 302H		B-15-T18S-R34E	431FNL/1339FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D
Explorer 15 State Com 303H		B-15-T18S-R34E	431FNL/1319FEL	1000 BBL/D	1800 MCF/D	8000 BBL/D

**IV. Central Delivery Point Name:** Explorer CTB 1 [See 19.15.27.9(D)(1) NMAC]

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Explorer 15 State Com 006H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 007H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 008H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 301H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 302H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025
Explorer 15 State Com 303H		05/01/2025	08/15/2025	08/22/2025	09/30/2025	09/30/2025

**VI. Separation Equipment:** ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

**Section 3 - Certifications****Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

***If Operator checks this box, Operator will select one of the following:***

**Well Shut-In.** ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.** ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

**Section 4 - Notices**

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:



Printed Name: John Harper

Title: VP of Geosciences

E-mail Address: John@avantnr.com

Date: 11/08/23

Phone: 678-988-6644

**OIL CONSERVATION DIVISION****(Only applicable when submitted as a standalone form)**

Approved By:

Title:

Approval Date:

Conditions of Approval:

**Avant Operating, LLC Natural Gas Management Plan**

- VI. Separation equipment will be sized by construction engineering staff based on stated manufacturer daily throughput capacities and anticipated daily production rates to ensure adequate capacity. Closed vent system piping, compression needs, and VRUs will be sized utilizing ProMax modelling software to ensure adequate capacity for anticipated production volumes and conditions.
- VII. Avant Operating, LLC (Avant) will take the following actions to comply with the regulations listed in 19.15.27.8:
- A. Avant will maximize the recovery of natural gas by minimizing the waste, as defined by 19.15.2 NMAC, of natural gas through venting and flaring. Avant will ensure that well(s) will be connected to a natural gas gathering system with sufficient capacity to transport natural gas.
  - B. All drilling operations will be equipped with a rig flare located at least 100' from the nearest surface hole. Rig flare will be utilized to combust any natural gas that is brought to surface during normal drilling operations. In the case of emergency venting or flaring the volumes will be estimated and reported appropriately.
  - C. During completion operations any natural gas brought to surface will be flared. Immediately following the finish of completion operations, all well flowback will be directed to permanent separation equipment. Produced natural gas from separation equipment will be sent to sales. It is not anticipated that gas will not meet pipeline standards. However, if natural gas does not meet gathering pipeline quality specifications, Avant will flare the natural gas for 60 days or until the natural gas meets the pipeline quality specifications. Avant will ensure that the flare is sized properly and is equipped with automatic igniter or continuous pilot. The gas sample will be analyzed twice per week and the gas will be routed into a gathering system as soon as pipeline specifications are met.
  - D. Avant will comply with the performance standards requirements and provisions listed in 19.15.27.8 (l) through (8). All equipment will be designed and sized to handle maximum anticipated pressures and throughputs to minimize the waste. Production storage tanks constructed after May 25, 2021, will be equipped with automatic gauging system. Flares constructed after May 25, 2021, will be equipped with automatic igniter or continuous pilot. Flares will be located at least 100' from the well and storage tanks unless otherwise approved by the division. Avant will conduct AVO inspections as described in 19.15.27.8 E (5) (a) with frequencies specified in 19.15.27.8 E (5) (b) and (c). All emergencies will be resolved as quickly and safely as feasible to minimize waste.
  - E. The volume of natural gas that is vented or flared as the result of malfunction or emergency during drilling and completions operations will be estimated. The volume of natural gas that is vented, flared, or beneficially used during production operations, will be measured, or estimated. Avant will install equipment to measure



## **Avant Operating, LLC**

**Lea Co., NM (NAD 83)**

**Explorer 15 State Com Pad 2**

**Explorer 15 State Com 303H**

**OH**

**Plan: Plan 0.1**

## **Standard Planning Report**

**30 October, 2023**







## Planning Report



<b>Database:</b>	EDM 5000.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Explorer 15 State Com 303H
<b>Company:</b>	Avant Operating, LLC	<b>TVD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Project:</b>	Lea Co., NM (NAD 83)	<b>MD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Site:</b>	Explorer 15 State Com Pad 2	<b>North Reference:</b>	Grid
<b>Well:</b>	Explorer 15 State Com 303H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan 0.1		

<b>Project</b>	Lea Co., NM (NAD 83)		
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	North American Datum 1983		
<b>Map Zone:</b>	New Mexico Eastern Zone		

Site		Explorer 15 State Com Pad 2			
Site Position:		Northing:	638,966.75 usft	Latitude:	32.7540850°N
From:	Lat/Long	Easting:	783,247.96 usft	Longitude:	103.5464490°W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	Explorer 15 State Com 303H					
Well Position	+N/-S	0.0 usft	Northing:	638,886.58 usft	Latitude:	32.7538490°N
	+E/-W	0.0 usft	Easting:	784,012.58 usft	Longitude:	103.5439640°W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	4,018.0 usft
Grid Convergence:	0.43 °					

<b>Wellbore</b>	OH				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2000	12/31/2004	8.59	60.94	49,744.97488556

<b>Design</b>	Plan 0.1				
<b>Audit Notes:</b>					
<b>Version:</b>		<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0
<b>Vertical Section:</b>	<b>Depth From (TVD) (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>	
	0.0	0.0	0.0	173.84	

<b>Plan Survey Tool Program</b>	<b>Date</b>	10/30/2023			
<b>Depth From (usft)</b>	<b>Depth To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Remarks</b>	
1	0.0	18,761.4 Plan 0.1 (OH)	B001Mb_MWD+HRGM		
			OWSG MWD + HRGM		

<b>Plan Sections</b>										
<b>Measured Depth (usft)</b>	<b>Inclination (°)</b>	<b>Azimuth (°)</b>	<b>Vertical Depth (usft)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Dogleg Rate (°/100usft)</b>	<b>Build Rate (°/100usft)</b>	<b>Turn Rate (°/100usft)</b>	<b>TFO (°)</b>	<b>Target</b>
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,573.1	11.46	68.40	2,569.3	21.0	53.1	2.00	2.00	0.00	68.40	
7,329.4	11.46	68.40	7,230.7	369.0	931.9	0.00	0.00	0.00	0.00	
7,902.5	0.00	0.00	7,800.0	390.0	985.0	2.00	-2.00	0.00	180.00	
8,075.0	0.00	0.00	7,972.5	390.0	985.0	0.00	0.00	0.00	0.00	
8,825.0	90.00	179.47	8,450.0	-87.4	989.4	12.00	12.00	0.00	179.47	
18,762.2	90.00	179.47	8,450.0	-10,024.2	1,081.9	0.00	0.00	0.00	0.00	Explorer 15 State Cor





## Planning Report



<b>Database:</b>	EDM 5000.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Explorer 15 State Com 303H
<b>Company:</b>	Avant Operating, LLC	<b>TVD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Project:</b>	Lea Co., NM (NAD 83)	<b>MD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Site:</b>	Explorer 15 State Com Pad 2	<b>North Reference:</b>	Grid
<b>Well:</b>	Explorer 15 State Com 303H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,780.0	0.00	0.00	1,780.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>RUSTLER</b>									
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,890.0	0.00	0.00	1,890.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>SALT</b>									
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>KOP - Start Build 2.00</b>									
2,100.0	2.00	68.40	2,100.0	0.6	1.6	-0.5	2.00	2.00	0.00
2,200.0	4.00	68.40	2,199.8	2.6	6.5	-1.9	2.00	2.00	0.00
2,300.0	6.00	68.40	2,299.5	5.8	14.6	-4.2	2.00	2.00	0.00
2,400.0	8.00	68.40	2,398.7	10.3	25.9	-7.4	2.00	2.00	0.00
2,500.0	10.00	68.40	2,497.5	16.0	40.5	-11.6	2.00	2.00	0.00
2,573.1	11.46	68.40	2,569.3	21.0	53.1	-15.2	2.00	2.00	0.00
<b>Start 4756.3 hold at 2573.1 MD</b>									
2,600.0	11.46	68.40	2,595.6	23.0	58.1	-16.6	0.00	0.00	0.00
2,700.0	11.46	68.40	2,693.7	30.3	76.6	-21.9	0.00	0.00	0.00
2,800.0	11.46	68.40	2,791.7	37.6	95.0	-27.2	0.00	0.00	0.00
2,900.0	11.46	68.40	2,889.7	44.9	113.5	-32.5	0.00	0.00	0.00
3,000.0	11.46	68.40	2,987.7	52.3	132.0	-37.8	0.00	0.00	0.00
3,100.0	11.46	68.40	3,085.7	59.6	150.5	-43.1	0.00	0.00	0.00
3,200.0	11.46	68.40	3,183.7	66.9	168.9	-48.4	0.00	0.00	0.00
3,300.0	11.46	68.40	3,281.7	74.2	187.4	-53.7	0.00	0.00	0.00
3,400.0	11.46	68.40	3,379.7	81.5	205.9	-59.0	0.00	0.00	0.00
3,500.0	11.46	68.40	3,477.7	88.8	224.4	-64.2	0.00	0.00	0.00
3,600.0	11.46	68.40	3,575.7	96.2	242.8	-69.5	0.00	0.00	0.00
3,680.9	11.46	68.40	3,655.0	102.1	257.8	-73.8	0.00	0.00	0.00
<b>SEVEN RIVERS</b>									
3,700.0	11.46	68.40	3,673.7	103.5	261.3	-74.8	0.00	0.00	0.00
3,800.0	11.46	68.40	3,771.7	110.8	279.8	-80.1	0.00	0.00	0.00
3,900.0	11.46	68.40	3,869.7	118.1	298.3	-85.4	0.00	0.00	0.00
4,000.0	11.46	68.40	3,967.7	125.4	316.8	-90.7	0.00	0.00	0.00
4,100.0	11.46	68.40	4,065.7	132.7	335.2	-96.0	0.00	0.00	0.00
4,200.0	11.46	68.40	4,163.7	140.0	353.7	-101.3	0.00	0.00	0.00
4,300.0	11.46	68.40	4,261.7	147.4	372.2	-106.6	0.00	0.00	0.00



## Planning Report



<b>Database:</b>	EDM 5000.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Explorer 15 State Com 303H
<b>Company:</b>	Avant Operating, LLC	<b>TVD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Project:</b>	Lea Co., NM (NAD 83)	<b>MD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Site:</b>	Explorer 15 State Com Pad 2	<b>North Reference:</b>	Grid
<b>Well:</b>	Explorer 15 State Com 303H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,400.0	11.46	68.40	4,359.8	154.7	390.7	-111.9	0.00	0.00	0.00
4,430.9	11.46	68.40	4,390.0	156.9	396.4	-113.5	0.00	0.00	0.00
<b>QUEEN</b>									
4,500.0	11.46	68.40	4,457.8	162.0	409.1	-117.2	0.00	0.00	0.00
4,600.0	11.46	68.40	4,555.8	169.3	427.6	-122.4	0.00	0.00	0.00
4,700.0	11.46	68.40	4,653.8	176.6	446.1	-127.7	0.00	0.00	0.00
4,800.0	11.46	68.40	4,751.8	183.9	464.6	-133.0	0.00	0.00	0.00
4,900.0	11.46	68.40	4,849.8	191.3	483.0	-138.3	0.00	0.00	0.00
5,000.0	11.46	68.40	4,947.8	198.6	501.5	-143.6	0.00	0.00	0.00
5,050.2	11.46	68.40	4,997.0	202.2	510.8	-146.3	0.00	0.00	0.00
<b>CAPTAN REEF</b>									
5,100.0	11.46	68.40	5,045.8	205.9	520.0	-148.9	0.00	0.00	0.00
5,200.0	11.46	68.40	5,143.8	213.2	538.5	-154.2	0.00	0.00	0.00
5,300.0	11.46	68.40	5,241.8	220.5	556.9	-159.5	0.00	0.00	0.00
5,400.0	11.46	68.40	5,339.8	227.8	575.4	-164.8	0.00	0.00	0.00
5,500.0	11.46	68.40	5,437.8	235.1	593.9	-170.1	0.00	0.00	0.00
5,600.0	11.46	68.40	5,535.8	242.5	612.4	-175.3	0.00	0.00	0.00
5,700.0	11.46	68.40	5,633.8	249.8	630.8	-180.6	0.00	0.00	0.00
5,718.5	11.46	68.40	5,652.0	251.1	634.3	-181.6	0.00	0.00	0.00
<b>CHERRY CANYON</b>									
5,800.0	11.46	68.40	5,731.8	257.1	649.3	-185.9	0.00	0.00	0.00
5,879.8	11.46	68.40	5,810.0	262.9	664.1	-190.1	0.00	0.00	0.00
<b>BRUSHY CANYON</b>									
5,900.0	11.46	68.40	5,829.8	264.4	667.8	-191.2	0.00	0.00	0.00
6,000.0	11.46	68.40	5,927.8	271.7	686.3	-196.5	0.00	0.00	0.00
6,100.0	11.46	68.40	6,025.9	279.0	704.7	-201.8	0.00	0.00	0.00
6,200.0	11.46	68.40	6,123.9	286.4	723.2	-207.1	0.00	0.00	0.00
6,300.0	11.46	68.40	6,221.9	293.7	741.7	-212.4	0.00	0.00	0.00
6,400.0	11.46	68.40	6,319.9	301.0	760.2	-217.7	0.00	0.00	0.00
6,500.0	11.46	68.40	6,417.9	308.3	778.6	-223.0	0.00	0.00	0.00
6,600.0	11.46	68.40	6,515.9	315.6	797.1	-228.3	0.00	0.00	0.00
6,675.6	11.46	68.40	6,590.0	321.1	811.1	-232.3	0.00	0.00	0.00
<b>Top of BSGI</b>									
6,700.0	11.46	68.40	6,613.9	322.9	815.6	-233.5	0.00	0.00	0.00
6,800.0	11.46	68.40	6,711.9	330.2	834.1	-238.8	0.00	0.00	0.00
6,900.0	11.46	68.40	6,809.9	337.6	852.5	-244.1	0.00	0.00	0.00
7,000.0	11.46	68.40	6,907.9	344.9	871.0	-249.4	0.00	0.00	0.00
7,100.0	11.46	68.40	7,005.9	352.2	889.5	-254.7	0.00	0.00	0.00
7,200.0	11.46	68.40	7,103.9	359.5	908.0	-260.0	0.00	0.00	0.00
7,300.0	11.46	68.40	7,201.9	366.8	926.5	-265.3	0.00	0.00	0.00
7,329.4	11.46	68.40	7,230.7	369.0	931.9	-266.8	0.00	0.00	0.00
<b>Start Drop -2.00</b>									
7,400.0	10.05	68.40	7,300.1	373.8	944.1	-270.3	2.00	-2.00	0.00
7,500.0	8.05	68.40	7,398.8	379.6	958.8	-274.5	2.00	-2.00	0.00
7,600.0	6.05	68.40	7,498.1	384.1	970.2	-277.8	2.00	-2.00	0.00
7,700.0	4.05	68.40	7,597.7	387.4	978.3	-280.1	2.00	-2.00	0.00
7,800.0	2.05	68.40	7,697.5	389.3	983.3	-281.6	2.00	-2.00	0.00
7,900.0	0.05	68.40	7,797.5	390.0	985.0	-282.1	2.00	-2.00	0.00
7,902.5	0.00	0.00	7,800.0	390.0	985.0	-282.1	2.00	-2.00	0.00
<b>Start 172.5 hold at 7902.5 MD</b>									
8,000.0	0.00	0.00	7,897.5	390.0	985.0	-282.1	0.00	0.00	0.00
8,075.0	0.00	0.00	7,972.5	390.0	985.0	-282.1	0.00	0.00	0.00
<b>KOP #2 - Start Build 12.00</b>									



## Planning Report



<b>Database:</b>	EDM 5000.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Explorer 15 State Com 303H
<b>Company:</b>	Avant Operating, LLC	<b>TVD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Project:</b>	Lea Co., NM (NAD 83)	<b>MD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Site:</b>	Explorer 15 State Com Pad 2	<b>North Reference:</b>	Grid
<b>Well:</b>	Explorer 15 State Com 303H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,100.0	3.00	179.47	7,997.5	389.3	985.0	-281.4	12.00	12.00	0.00
8,200.0	15.00	179.47	8,096.1	373.7	985.2	-265.9	12.00	12.00	0.00
8,300.0	27.00	179.47	8,189.3	338.0	985.5	-230.3	12.00	12.00	0.00
8,400.0	39.00	179.47	8,273.0	283.6	986.0	-176.2	12.00	12.00	0.00
8,484.7	49.17	179.47	8,333.8	224.7	986.5	-117.6	12.00	12.00	0.00
Explorer 15 State Com 303H FTP									
8,500.0	51.00	179.47	8,343.6	213.0	986.6	-105.9	12.00	12.00	0.00
8,600.0	63.00	179.47	8,398.0	129.3	987.4	-22.6	12.00	12.00	0.00
8,641.1	67.93	179.47	8,415.0	92.0	987.8	14.5	12.00	12.00	0.00
Top of FBSG SD									
8,700.0	75.00	179.47	8,433.7	36.1	988.3	70.1	12.00	12.00	0.00
8,800.0	87.00	179.47	8,449.3	-62.4	989.2	168.2	12.00	12.00	0.00
8,825.0	90.00	179.47	8,450.0	-87.4	989.4	193.1	12.00	12.00	0.00
LP - Start 9937.2 hold at 8825.0 MD									
8,900.0	90.00	179.47	8,450.0	-162.4	990.1	267.7	0.00	0.00	0.00
9,000.0	90.00	179.47	8,450.0	-262.4	991.1	367.3	0.00	0.00	0.00
9,100.0	90.00	179.47	8,450.0	-362.4	992.0	466.8	0.00	0.00	0.00
9,200.0	90.00	179.47	8,450.0	-462.4	992.9	566.3	0.00	0.00	0.00
9,300.0	90.00	179.47	8,450.0	-562.4	993.9	665.8	0.00	0.00	0.00
9,400.0	90.00	179.47	8,450.0	-662.4	994.8	765.3	0.00	0.00	0.00
9,500.0	90.00	179.47	8,450.0	-762.4	995.7	864.8	0.00	0.00	0.00
9,600.0	90.00	179.47	8,450.0	-862.4	996.7	964.4	0.00	0.00	0.00
9,700.0	90.00	179.47	8,450.0	-962.4	997.6	1,063.9	0.00	0.00	0.00
9,800.0	90.00	179.47	8,450.0	-1,062.4	998.5	1,163.4	0.00	0.00	0.00
9,900.0	90.00	179.47	8,450.0	-1,162.4	999.4	1,262.9	0.00	0.00	0.00
10,000.0	90.00	179.47	8,450.0	-1,262.4	1,000.4	1,362.4	0.00	0.00	0.00
10,100.0	90.00	179.47	8,450.0	-1,362.4	1,001.3	1,462.0	0.00	0.00	0.00
10,200.0	90.00	179.47	8,450.0	-1,462.4	1,002.2	1,561.5	0.00	0.00	0.00
10,300.0	90.00	179.47	8,450.0	-1,562.4	1,003.2	1,661.0	0.00	0.00	0.00
10,400.0	90.00	179.47	8,450.0	-1,662.4	1,004.1	1,760.5	0.00	0.00	0.00
10,500.0	90.00	179.47	8,450.0	-1,762.4	1,005.0	1,860.0	0.00	0.00	0.00
10,600.0	90.00	179.47	8,450.0	-1,862.4	1,006.0	1,959.5	0.00	0.00	0.00
10,700.0	90.00	179.47	8,450.0	-1,962.3	1,006.9	2,059.1	0.00	0.00	0.00
10,800.0	90.00	179.47	8,450.0	-2,062.3	1,007.8	2,158.6	0.00	0.00	0.00
10,900.0	90.00	179.47	8,450.0	-2,162.3	1,008.8	2,258.1	0.00	0.00	0.00
11,000.0	90.00	179.47	8,450.0	-2,262.3	1,009.7	2,357.6	0.00	0.00	0.00
11,100.0	90.00	179.47	8,450.0	-2,362.3	1,010.6	2,457.1	0.00	0.00	0.00
11,200.0	90.00	179.47	8,450.0	-2,462.3	1,011.5	2,556.7	0.00	0.00	0.00
11,300.0	90.00	179.47	8,450.0	-2,562.3	1,012.5	2,656.2	0.00	0.00	0.00
11,400.0	90.00	179.47	8,450.0	-2,662.3	1,013.4	2,755.7	0.00	0.00	0.00
11,500.0	90.00	179.47	8,450.0	-2,762.3	1,014.3	2,855.2	0.00	0.00	0.00
11,600.0	90.00	179.47	8,450.0	-2,862.3	1,015.3	2,954.7	0.00	0.00	0.00
11,700.0	90.00	179.47	8,450.0	-2,962.3	1,016.2	3,054.2	0.00	0.00	0.00
11,800.0	90.00	179.47	8,450.0	-3,062.3	1,017.1	3,153.8	0.00	0.00	0.00
11,900.0	90.00	179.47	8,450.0	-3,162.3	1,018.1	3,253.3	0.00	0.00	0.00
12,000.0	90.00	179.47	8,450.0	-3,262.3	1,019.0	3,352.8	0.00	0.00	0.00
12,100.0	90.00	179.47	8,450.0	-3,362.3	1,019.9	3,452.3	0.00	0.00	0.00
12,200.0	90.00	179.47	8,450.0	-3,462.3	1,020.9	3,551.8	0.00	0.00	0.00
12,300.0	90.00	179.47	8,450.0	-3,562.3	1,021.8	3,651.4	0.00	0.00	0.00
12,400.0	90.00	179.47	8,450.0	-3,662.3	1,022.7	3,750.9	0.00	0.00	0.00
12,500.0	90.00	179.47	8,450.0	-3,762.3	1,023.6	3,850.4	0.00	0.00	0.00
12,600.0	90.00	179.47	8,450.0	-3,862.3	1,024.6	3,949.9	0.00	0.00	0.00
12,700.0	90.00	179.47	8,450.0	-3,962.3	1,025.5	4,049.4	0.00	0.00	0.00



## Planning Report



<b>Database:</b>	EDM 5000.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Explorer 15 State Com 303H
<b>Company:</b>	Avant Operating, LLC	<b>TVD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Project:</b>	Lea Co., NM (NAD 83)	<b>MD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Site:</b>	Explorer 15 State Com Pad 2	<b>North Reference:</b>	Grid
<b>Well:</b>	Explorer 15 State Com 303H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,800.0	90.00	179.47	8,450.0	-4,062.3	1,026.4	4,148.9	0.00	0.00	0.00
12,900.0	90.00	179.47	8,450.0	-4,162.3	1,027.4	4,248.5	0.00	0.00	0.00
13,000.0	90.00	179.47	8,450.0	-4,262.2	1,028.3	4,348.0	0.00	0.00	0.00
13,100.0	90.00	179.47	8,450.0	-4,362.2	1,029.2	4,447.5	0.00	0.00	0.00
13,200.0	90.00	179.47	8,450.0	-4,462.2	1,030.2	4,547.0	0.00	0.00	0.00
13,300.0	90.00	179.47	8,450.0	-4,562.2	1,031.1	4,646.5	0.00	0.00	0.00
13,400.0	90.00	179.47	8,450.0	-4,662.2	1,032.0	4,746.1	0.00	0.00	0.00
13,500.0	90.00	179.47	8,450.0	-4,762.2	1,032.9	4,845.6	0.00	0.00	0.00
13,600.0	90.00	179.47	8,450.0	-4,862.2	1,033.9	4,945.1	0.00	0.00	0.00
13,700.0	90.00	179.47	8,450.0	-4,962.2	1,034.8	5,044.6	0.00	0.00	0.00
13,800.0	90.00	179.47	8,450.0	-5,062.2	1,035.7	5,144.1	0.00	0.00	0.00
13,900.0	90.00	179.47	8,450.0	-5,162.2	1,036.7	5,243.6	0.00	0.00	0.00
14,000.0	90.00	179.47	8,450.0	-5,262.2	1,037.6	5,343.2	0.00	0.00	0.00
14,100.0	90.00	179.47	8,450.0	-5,362.2	1,038.5	5,442.7	0.00	0.00	0.00
14,200.0	90.00	179.47	8,450.0	-5,462.2	1,039.5	5,542.2	0.00	0.00	0.00
14,300.0	90.00	179.47	8,450.0	-5,562.2	1,040.4	5,641.7	0.00	0.00	0.00
14,400.0	90.00	179.47	8,450.0	-5,662.2	1,041.3	5,741.2	0.00	0.00	0.00
14,500.0	90.00	179.47	8,450.0	-5,762.2	1,042.3	5,840.8	0.00	0.00	0.00
14,600.0	90.00	179.47	8,450.0	-5,862.2	1,043.2	5,940.3	0.00	0.00	0.00
14,700.0	90.00	179.47	8,450.0	-5,962.2	1,044.1	6,039.8	0.00	0.00	0.00
14,800.0	90.00	179.47	8,450.0	-6,062.2	1,045.0	6,139.3	0.00	0.00	0.00
14,900.0	90.00	179.47	8,450.0	-6,162.2	1,046.0	6,238.8	0.00	0.00	0.00
15,000.0	90.00	179.47	8,450.0	-6,262.2	1,046.9	6,338.3	0.00	0.00	0.00
15,100.0	90.00	179.47	8,450.0	-6,362.2	1,047.8	6,437.9	0.00	0.00	0.00
15,200.0	90.00	179.47	8,450.0	-6,462.2	1,048.8	6,537.4	0.00	0.00	0.00
15,300.0	90.00	179.47	8,450.0	-6,562.1	1,049.7	6,636.9	0.00	0.00	0.00
15,400.0	90.00	179.47	8,450.0	-6,662.1	1,050.6	6,736.4	0.00	0.00	0.00
15,500.0	90.00	179.47	8,450.0	-6,762.1	1,051.6	6,835.9	0.00	0.00	0.00
15,600.0	90.00	179.47	8,450.0	-6,862.1	1,052.5	6,935.5	0.00	0.00	0.00
15,700.0	90.00	179.47	8,450.0	-6,962.1	1,053.4	7,035.0	0.00	0.00	0.00
15,800.0	90.00	179.47	8,450.0	-7,062.1	1,054.4	7,134.5	0.00	0.00	0.00
15,900.0	90.00	179.47	8,450.0	-7,162.1	1,055.3	7,234.0	0.00	0.00	0.00
16,000.0	90.00	179.47	8,450.0	-7,262.1	1,056.2	7,333.5	0.00	0.00	0.00
16,100.0	90.00	179.47	8,450.0	-7,362.1	1,057.1	7,433.0	0.00	0.00	0.00
16,200.0	90.00	179.47	8,450.0	-7,462.1	1,058.1	7,532.6	0.00	0.00	0.00
16,300.0	90.00	179.47	8,450.0	-7,562.1	1,059.0	7,632.1	0.00	0.00	0.00
16,400.0	90.00	179.47	8,450.0	-7,662.1	1,059.9	7,731.6	0.00	0.00	0.00
16,500.0	90.00	179.47	8,450.0	-7,762.1	1,060.9	7,831.1	0.00	0.00	0.00
16,600.0	90.00	179.47	8,450.0	-7,862.1	1,061.8	7,930.6	0.00	0.00	0.00
16,700.0	90.00	179.47	8,450.0	-7,962.1	1,062.7	8,030.2	0.00	0.00	0.00
16,800.0	90.00	179.47	8,450.0	-8,062.1	1,063.7	8,129.7	0.00	0.00	0.00
16,900.0	90.00	179.47	8,450.0	-8,162.1	1,064.6	8,229.2	0.00	0.00	0.00
17,000.0	90.00	179.47	8,450.0	-8,262.1	1,065.5	8,328.7	0.00	0.00	0.00
17,100.0	90.00	179.47	8,450.0	-8,362.1	1,066.5	8,428.2	0.00	0.00	0.00
17,200.0	90.00	179.47	8,450.0	-8,462.1	1,067.4	8,527.7	0.00	0.00	0.00
17,300.0	90.00	179.47	8,450.0	-8,562.1	1,068.3	8,627.3	0.00	0.00	0.00
17,400.0	90.00	179.47	8,450.0	-8,662.1	1,069.2	8,726.8	0.00	0.00	0.00
17,500.0	90.00	179.47	8,450.0	-8,762.1	1,070.2	8,826.3	0.00	0.00	0.00
17,600.0	90.00	179.47	8,450.0	-8,862.0	1,071.1	8,925.8	0.00	0.00	0.00
17,700.0	90.00	179.47	8,450.0	-8,962.0	1,072.0	9,025.3	0.00	0.00	0.00
17,800.0	90.00	179.47	8,450.0	-9,062.0	1,073.0	9,124.9	0.00	0.00	0.00
17,900.0	90.00	179.47	8,450.0	-9,162.0	1,073.9	9,224.4	0.00	0.00	0.00
18,000.0	90.00	179.47	8,450.0	-9,262.0	1,074.8	9,323.9	0.00	0.00	0.00
18,100.0	90.00	179.47	8,450.0	-9,362.0	1,075.8	9,423.4	0.00	0.00	0.00



## Planning Report



<b>Database:</b>	EDM 5000.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Explorer 15 State Com 303H
<b>Company:</b>	Avant Operating, LLC	<b>TVD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Project:</b>	Lea Co., NM (NAD 83)	<b>MD Reference:</b>	WELL @ 4044.5usft (4044.5)
<b>Site:</b>	Explorer 15 State Com Pad 2	<b>North Reference:</b>	Grid
<b>Well:</b>	Explorer 15 State Com 303H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan 0.1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,200.0	90.00	179.47	8,450.0	-9,462.0	1,076.7	9,522.9	0.00	0.00	0.00
18,300.0	90.00	179.47	8,450.0	-9,562.0	1,077.6	9,622.4	0.00	0.00	0.00
18,400.0	90.00	179.47	8,450.0	-9,662.0	1,078.5	9,722.0	0.00	0.00	0.00
18,500.0	90.00	179.47	8,450.0	-9,762.0	1,079.5	9,821.5	0.00	0.00	0.00
18,600.0	90.00	179.47	8,450.0	-9,862.0	1,080.4	9,921.0	0.00	0.00	0.00
18,700.0	90.00	179.47	8,450.0	-9,962.0	1,081.3	10,020.5	0.00	0.00	0.00
18,762.2	90.00	179.47	8,450.0	-10,024.2	1,081.9	10,082.5	0.00	0.00	0.00
TD at 18762.2 - Explorer 15 State Com 303H LTP/BHL									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
Explorer 15 State Com 3	0.00	0.00	8,450.0	-10,024.2	1,081.9	628,862.34	785,094.50	32.7262760°N	103.5406890°W
- plan hits target center									
- Point									
Explorer 15 State Com 3	0.00	0.00	8,450.0	341.0	985.6	639,227.59	784,998.19	32.7547660°N	103.5407500°W
- plan misses target center by 164.4usft at 8484.7usft MD (8333.8 TVD, 224.7 N, 986.5 E)									
- Point									

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,780.0	1,780.0	RUSTLER				
1,890.0	1,890.0	SALT				
3,680.9	3,655.0	SEVEN RIVERS				
4,430.9	4,390.0	QUEEN				
5,050.2	4,997.0	CAPITAN REEF				
5,718.5	5,652.0	CHERRY CANYON				
5,879.8	5,810.0	BRUSHY CANYON				
6,675.6	6,590.0	Top of BSGL				
8,641.1	8,415.0	Top of FBSG SD				

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,000.0	2,000.0	0.0	0.0	KOP - Start Build 2.00
2,573.1	2,569.3	21.0	53.1	Start 4756.3 hold at 2573.1 MD
7,329.4	7,230.7	369.0	931.9	Start Drop -2.00
7,902.5	7,800.0	390.0	985.0	Start 172.5 hold at 7902.5 MD
8,075.0	7,972.5	390.0	985.0	KOP #2 - Start Build 12.00
8,825.0	8,450.0	-87.4	989.4	LP - Start 9937.2 hold at 8825.0 MD
18,762.2	8,450.0	-10,024.2	1,081.9	TD at 18762.2

Intent ☐ As Drilled ☐

API #		
Operator Name:	Property Name:	Well Number

## Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

## First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

## Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
Latitude					Longitude			NAD	

Is this well the defining well for the Horizontal Spacing Unit? ☐Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018