

<b>Well Name:</b> EAST BISTI COAL 6	<b>Well Location:</b> T25N / R11W / SEC 6 / NENE / 36.43506 / -108.03995	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 1	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMSF078062A	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b>
<b>US Well Number:</b> 3004527871	<b>Well Status:</b> Abandoned	<b>Operator:</b> DJR OPERATING LLC

**Subsequent Report**

**Sundry ID:** 2763223

**Type of Submission:** Subsequent Report

**Type of Action:** Plug and Abandonment

**Date Sundry Submitted:** 11/28/2023

**Time Sundry Submitted:** 10:04

**Date Operation Actually Began:** 11/09/2023

**Actual Procedure:** The subject well was Plugged & Abandoned on 11/09/2023 per the attached End of Well Report, As Plugged Wellbore Diagram, and Marker.

**SR Attachments**

**Actual Procedure**

EOWR\_BLM\_Submittal\_20231128100402.pdf

Well Name: EAST BISTI COAL 6

Well Location: T25N / R11W / SEC 6 / NENE / 36.43506 / -108.03995

County or Parish/State: SAN JUAN / NM

Well Number: 1

Type of Well: OTHER

Allottee or Tribe Name:

Lease Number: NMSF078062A

Unit or CA Name:

Unit or CA Number:

US Well Number: 3004527871

Well Status: Abandoned

Operator: DJR OPERATING LLC

**Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: SHAW-MARIE FORD

Signed on: NOV 28, 2023 10:04 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 ROAD 3263

City: AZTEC

State: NM

Phone: (505) 632-3476

Email address: SFORD@DJRLLC.COM

**Field**

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

**BLM Point of Contact**

BLM POC Name: MATTHEW H KADE

BLM POC Title: Petroleum Engineer

BLM POC Phone: 5055647736

BLM POC Email Address: MKADE@BLM.GOV

Disposition: Accepted

Disposition Date: 11/28/2023

Signature: Matthew Kade

DJR Operating, LLC  
P&A End of Well Report  
East Bisti Coal 6 1  
API # 30-045-27871  
NE/NE, Unit A. Sec 6, T25N, R11W  
San Juan County, NM  
Spud Date: 5-16-1990  
Plug Date: 11-9-2023

11-8-2023:

MIRU rig and equipment. SITP = 25, SICP = 25, BH = 0. Pull rods and tubing.

11-9-2023:

SITP = N/A, SICP = 25, BH = 0. TIH with bit, mill and 2 3/8" workstring to 1202'. TOOH.

TIH, set cement retainer at 1180'. Load and roll hole, PT casing, good test.

P&A Plug 1: Fruitland Coal perforations: Mix and pump a plug of 10 sx through retainer and into Fruitland perforations. TOOH; take off retainer stinger.

TIH, to 1180'.

P&A Plugs 2 and 3: Fruitland, Kirtland, Ojo Alamo formation tops to surface: Mix and spot a balanced plug of 50 sx from 1180' to 550'. Pull up to 550', mix and spot a balanced plug of 40 sx from 550' to 100'. TOOH.

Top off: ND BOP. Cut off WH. TOC in 7" and 4 1/2" casings at 100'. Installed P&A marker, top off casings and cellar with poly pipe and 46 sx cement.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx.

Regulatory representative; Johnnie Begay, Navajo Nation Minerals and Monica Kuehling, NMOCD via phone

GPS Coordinates: Lat; 36.435062 N , Long; 108.040641 W

DJR Operating, LLC  
P&A Marker  
East Bisti Coal 6 1  
API # 30-045-27871  
NE/NE, Unit A, Sec 6, T25N, R11W  
San Juan County, NM  
Spud Date: 5-16-1990  
Plug Date: 11-9-2023



**DJR Operating, LLC**  
**End of Well Report**  
**East Bisti Coal 6 1**  
 API # 30-045-27871  
 NE/NE, Unit A, Sec 6, T25N, R11W  
 San Juan County, NM

GL 6301'  
 KB N/A  
 Spud Date 5/16/1990

**SURF CSG**

Hole size: 8.75"  
 Csg Size: 7"  
 Wt: 20#  
 Grade: J-55  
 ID: 6.456"  
 Depth: 127'  
 casing cap ft<sup>3</sup>/ft: 0.2273  
 TOC: Circ cmt to surface

**FORMATION TOPS**


Nacimiento	Surface
Ojo Alamo	272'
Kirtland	411'
Fruitland Coal	949'
Pictured Cliffs	1255'

**PROD CSG**

Hole size: 6.25"  
 Csg Size: 4.5"  
 Wt: 9.5#  
 Grade: J-55  
 ID: 4.09"  
 Depth: 1324'  
 casing cap ft<sup>3</sup>/ft: 0.0912  
 7x4.5 capacity ft<sup>3</sup>/ft : 0.1169  
 TOC: Circ cmt to surface

Fruitland Coal perms  
 1228-1252'

PBTD 1295'  
 TD 1325'

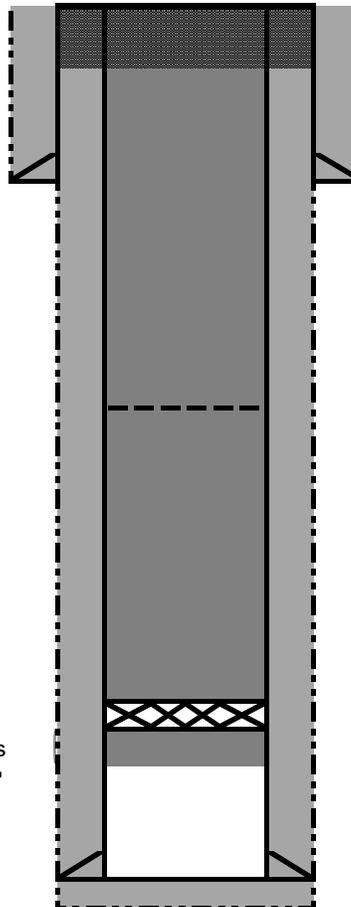

11-9-2023: Plug 4: Top off: Cut off WH, TOC at 100' in 7" and 4 1/2" casings. Install P&A marker. Mix and place plug of 46 sx via poly pipe to top off casings and cellar.

11-9-2023: Plugs 2 and 3: Fruitland, Kirtland and Ojo Alamo formation tops: Mix and spot a balanced plug of 50 sx from 1180' to 550'. Pull up to 550', mix and spot a balanced plug of 40 sx from 550' to 100'.

11-9-2023: Plug 1: Fruitland perforations: Set CR at 1180'. PT casing, good test. Mix and pump 10 sx through CR into perforations. TOOH.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx  
 Regulatory representative: Johnnie Begay, Navajo Nation Minerals and Monica Kuehling, NMOCD via phone  
 GPS Coordinates: Lat; 36.435062 N, Long; 108.040641 W

**DJR Operating, LLC**  
**End of Well Report**  
**East Bisti Coal 6 1**  
 API # 30-045-27871  
 NE/NE, Unit A, Sec 6, T25N, R11W  
 San Juan County, NM

GL 6301'  
 KB N/A  
 Spud Date 5/16/1990

**SURF CSG**

Hole size: 8.75"  
 Csg Size: 7"  
 Wt: 20#  
 Grade: J-55  
 ID: 6.456"  
 Depth: 127'  
 casing cap ft<sup>3</sup>/ft: 0.2273  
 TOC: Circ cmt to surface

**FORMATION TOPS**


Nacimiento	Surface
Ojo Alamo	272'
Kirtland	411'
Fruitland Coal	949'
Pictured Cliffs	1255'

**PROD CSG**

Hole size: 6.25"  
 Csg Size: 4.5"  
 Wt: 9.5#  
 Grade: J-55  
 ID: 4.09"  
 Depth: 1324'  
 casing cap ft<sup>3</sup>/ft: 0.0912  
 7x4.5 capacity ft<sup>3</sup>/ft : 0.1169  
 TOC: Circ cmt to surface

Fruitland Coal perms  
 1228-1252'

PBTD 1295'  
 TD 1325'

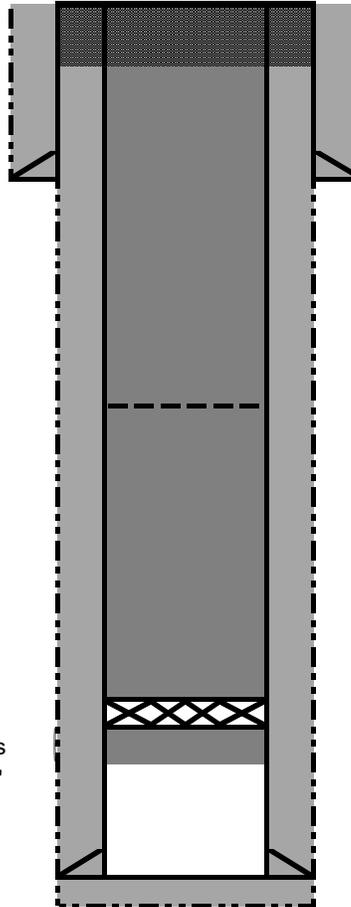

11-9-2023: Plug 4: Top off: Cut off WH, TOC at 100' in 7" and 4 1/2" casings. Install P&A marker. Mix and place plug of 46 sx via poly pipe to top off casings and cellar.

11-9-2023: Plugs 2 and 3: Fruitland, Kirtland and Ojo Alamo formation tops: Mix and spot a balanced plug of 50 sx from 1180' to 550'. Pull up to 550', mix and spot a balanced plug of 40 sx from 550' to 100'.

11-9-2023: Plug 1: Fruitland perforations: Set CR at 1180'. PT casing, good test. Mix and pump 10 sx through CR into perforations. TOOH.

All cement used was Class G mixed at 15.8 ppg, yield 1.15 cu ft/sx  
 Regulatory representative: Johnnie Begay, Navajo Nation Minerals and Monica Kuehling, NMOCD via phone  
 GPS Coordinates: Lat; 36.435062 N, Long; 108.040641 W

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS

Action 321636

**CONDITIONS**

Operator: DJR OPERATING, LLC 200 Energy Court Farmington, NM 87401	OGRID: 371838
	Action Number: 321636
	Action Type: [C-103] Sub. Plugging (C-103P)

**CONDITIONS**

Created By	Condition	Condition Date
mkuehling	well plugged 11/9/2023	3/29/2024