

Submit a Copy To Appropriate District

Office
 District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-005-20338
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. 16496
7. Lease Name or Unit Agreement Name Double L Queen Unit
8. Well Number #003Q
9. OGRID Number 269864
10. Pool name or Wildcat Double L Queen

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other **Injection**

2. Name of Operator
State of New Mexico formerly Canyon E&P Company

3. Address of Operator
1625 N. French Drive, Hobbs, NM 88240

4. Well Location
 Unit Letter **C** : **990** feet from the **N** line and **1650** feet from the **W** line
 Section **25** Township **14S** Range **29E** NMPM County **Chaves**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3889'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐
 CLOSED-LOOP SYSTEM ☐
 OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☒
 CASING/CEMENT JOB ☐
 OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

A-Plus P&A, LLC plugged this well from 11/09/2023-11/16/2023.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Abigail Anderson TITLE P&A Engineer - Agent DATE 12/30/2024

Type or print name Abigail Anderson E-mail address: aanderson@jmrsvices.com PHONE: 432-889-4673

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____

Conditions of Approval (if any):

**P&A Subsequent Report
State of New Mexico formerly Canyon E&P Company
Double L Queen #003Q
API # 30-005-20338**

Note: All cement is Class C mixed at 14.8 ppg, yield 1.32 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100% excess.

11/09/23 MIRU plugging equipment. Dug out cellar. NU BOP. POH w/ 1 jt of 2 3/8" tbg. RIH w/ 3 1/2" guage ring, tagged out @ 1,400'. RIH w/ tbg, tagged out @ 1,780'.

11/10/23 RIH w/ CICR, tagged out @ 1,400'. POH & found bottom of CICR broke off in hole. RIH w/ drill bit & drilled through debris. RIH w/ CICR, tagged out @ 1,400'. POH.

11/11/23 RIH w/ tbg to 1,790'. Spotted 25 sx class C cmt @ 1,790-1,600'. WOC & tagged @ 1,790'. Re-spotted 25 sx class C cmt @ 1790-1600'. WOC.

11/13/23 RU Jarrel Services Wireline. Ran CBL from 1,400' to surface, TOC @ 1,340'. Spotted 35 sx class C cmt 1,390-840'. WOC & tagged @ 870'.


11/14/23 Perf'd @ 456. Squeezed 210 sx class C cmt @ 456' & circulated to surface. ND BOP. RDMO.

11/16/23 Moved in backhoe & welder. Cut off wellhead. Verified TOC at surface. Installed an above ground DHM. Backfilled cellar, cleaned location, & moved off.

Canyon E&P Company		PLUGGED	
Author:	Abby @ JMR	Well No.	#3Q
Well Name	Double L Queen Unit	API #:	30-005-20338
Field/Pool	Double L Queen	Location:	Sec 25, T14S, R29E
County	Chaves		990 FVL & 1650 FWL
State	NM	GL:	3889
Spud Date	5/12/1970		

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8		24#	406	11	300	0
Prod Csg	4 1/2		9.5#	2,021	7 7/8	200	1,390

Formation	Top
Salt	925
Yates	1225
Queen	1978

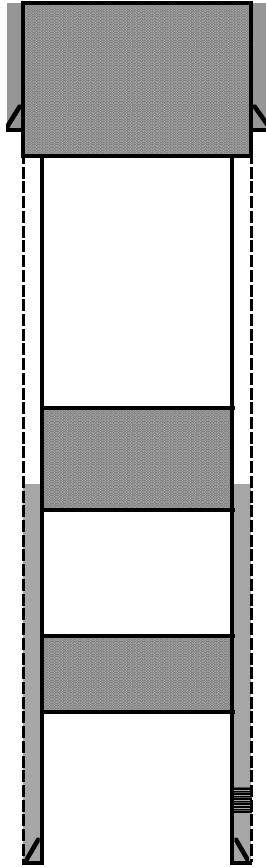

8 5/8 24# CSG @ 406
Hole Size: 11

Plug #3: Perf'd @ 456. Squeezed 210 sx class C cmt @ 456' & circulated to surface.

Plug #2: Spotted 35 sx class C cmt 1,390-840'. WOC & tagged @ 870'.

Plug #1: Spotted 25 sx class C cmt @ 1,790-1,600'. WOC & tagged @ 1,790'. Re-spotted 25 sx class C cmt @ 1790-1600'.

Perfs @ 1989-1978'


4 1/2 9.5# CSG @ 2,021
Hole Size: 7 7/8

TD @ 2030'

Canyon E&P Company			CURRENT
Author:	Abby @ JMR		
Well Name	Double L Queen Unit	Well No.	#3Q
Field/Pool	Double L Queen	API #:	30-005-20338
County	Chaves	Location:	Sec 25, T14S, R29E
State	NM		990 FVL & 1650 FWL
Spud Date	5/12/1970	GL:	3889

Description	O.D.	Grade	Weight	Depth	Hole	Cmt Sx	TOC
Surface Csg	8 5/8		24#	406	11	300	0
Prod Csg	4 1/2		9.5#	2,021	7 7/8	200	

Formation	Top
Salt	925
Yates	1225
Queen	1978

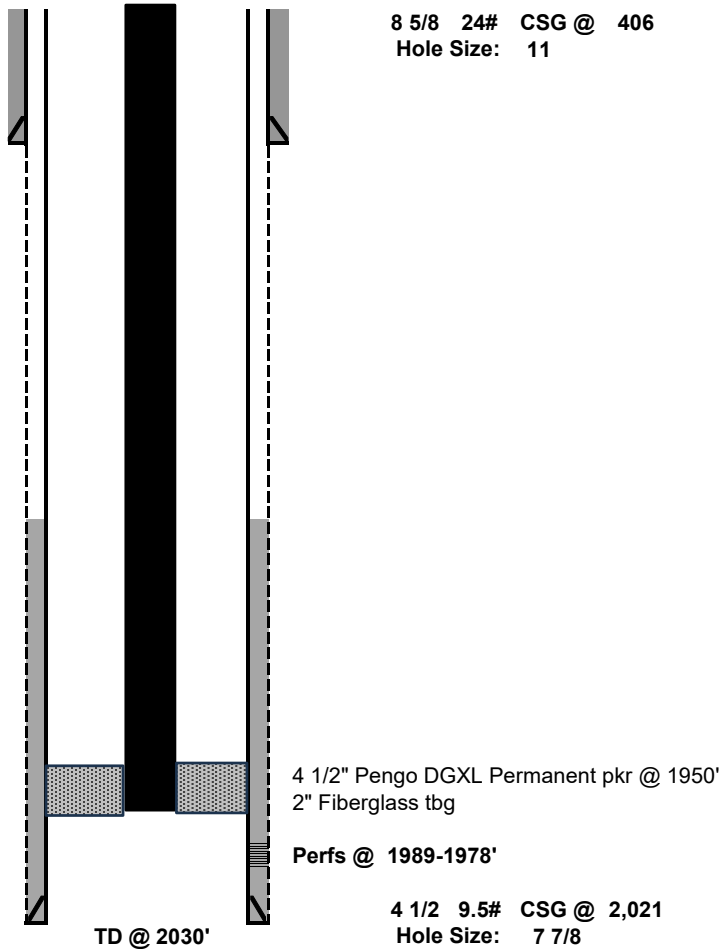

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/oed/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 416119

CONDITIONS

Operator: A-PLUS WELL SERVICE, INC. P.O. Box 1979 Farmington, NM 87499	OGRID: 370317
	Action Number: 416119
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
loren.diede	None	1/15/2025