# Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: ROCK RIDGE 29 Well Location: T22S / R32E / SEC 29 / County or Parish/State: LEA /

FEDERAL SWNW / 32.3643766 / -103.7020952 NM

Well Number: 01 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM96856 Unit or CA Name: Unit or CA Number:

INCORPORATED

#### **Notice of Intent**

**Sundry ID:** 2827788

Type of Submission: Notice of Intent

Type of Action: Plug and Abandonment

Date Sundry Submitted: 12/17/2024 Time Sundry Submitted: 07:27

Date proposed operation will begin: 01/01/2025

**Procedure Description:** EOG proposes to P&A this wellbore using the attached procedure. Current and proposed wellbore attached.

# **Surface Disturbance**

Is any additional surface disturbance proposed?: No

# **NOI Attachments**

#### **Procedure Description**

ROCK\_RIDGE\_29\_FEDERAL\_\_1\_PA\_Proc\_20241217072729.pdf

 $Rock\_Ridge\_29\_Fed\_\_1\_Proposed\_Wellbore\_Diagram\_20241217072711.pdf$ 

 $Rock\_Ridge\_29\_Fed\_\_1\_Current\_Wellbore\_Diagram\_20241217072700.pdf$ 

eived by OCD: 2/18/2025 3:40:13 PM Well Name: ROCK RIDGE 29

**FEDERAL** 

Well Location: T22S / R32E / SEC 29 / SWNW / 32.3643766 / -103.7020952

County or Parish/State: LEA/ 2 of

Well Number: 01

Type of Well: OIL WELL

**Allottee or Tribe Name:** 

Lease Number: NMNM96856

**Unit or CA Name:** 

**Unit or CA Number:** 

**US Well Number: 3002537646** 

**Operator: EOG RESOURCES** 

**INCORPORATED** 

# **Conditions of Approval**

#### **Specialist Review**

Rock\_Ridge\_29\_Federal\_1\_Sundry\_ID\_2827788\_P\_A\_20250218150016.pdf

# **Operator**

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

**Operator Electronic Signature: ALVINO GARCIA** Signed on: DEC 17, 2024 07:27 AM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS BLVD

City: MIDLAND State: TX

Phone: (432) 236-2924

Email address: ALVINO\_GARCIA@EOGRESOURCES.COM

#### **Field**

**Representative Name:** 

**Street Address:** 

City: State: Zip:

Phone:

**Email address:** 

# **BLM Point of Contact**

Signature: Long Vo

**BLM POC Name: LONG VO BLM POC Title:** Petroleum Engineer

**BLM POC Phone:** 5759885402 BLM POC Email Address: LVO@BLM.GOV

**Disposition:** Approved Disposition Date: 02/18/2025

Page 2 of 2

Form 3160-5 (June 2019)

# **UNITED STATES** DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 202

BUR	EAU OF LAND MANAGEMEN	5. Lease Serial No.	5. Lease Serial No.				
Do not use this t	IOTICES AND REPORTS ON form for proposals to drill or Use Form 3160-3 (APD) for s	to re-enter ar	1	6. If Indian, Allottee or Tribe Name			
SUBMIT IN	TRIPLICATE - Other instructions on p	age 2	7. If Unit of CA/Agreement, 1	Name and/or No.			
1. Type of Well  Oil Well  Gas W	Vell Other		8. Well Name and No.				
2. Name of Operator			9. API Well No.				
3a. Address	3b. Phone N	lo. (include area cod	(le) 10. Field and Pool or Explora	tory Area			
4. Location of Well (Footage, Sec., T., R	2.,M., or Survey Description)		11. Country or Parish, State				
12. CHE	CK THE APPROPRIATE BOX(ES) TO	INDICATE NATUR	E OF NOTICE, REPORT OR OTI	HER DATA			
TYPE OF SUBMISSION		TY	YPE OF ACTION				
Notice of Intent		eepen ydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity			
Subsequent Report		ew Construction	Recomplete	Other			
Subsequent Report	Change Plans Pl	ug and Abandon	Temporarily Abandon				
Final Abandonment Notice	Convert to Injection	ug Back	Water Disposal				
completed. Final Abandonment No is ready for final inspection.)	tices must be filed only after all requirem			3160-4 must be filed once testing has been the operator has detennined that the site			
14. I hereby certify that the foregoing is	true and correct. Name (Printed/Typed)	Title					
		1100					
Signature		Date					
	THE SPACE FOR FE	DERAL OR S	TATE OFICE USE				
Approved by		Tial		Data			
	hed. Approval of this notice does not war equitable title to those rights in the subject duct operations thereon.			Date			
Title 18 U.S.C Section 1001 and Title 4	3 U.S.C Section 1212, make it a crime for	r any person knowin	gly and willfully to make to any do	epartment or agency of the United States			

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

#### SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

#### **NOTICES**

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

## **Additional Information**

#### **Location of Well**

 $0. \ SHL: \ SWNW \ / \ 1980 \ FNL \ / \ 990 \ FWL \ / \ TWSP: \ 22S \ / \ RANGE: \ 32E \ / \ SECTION: \ 29 \ / \ LAT: \ 32.3643766 \ / \ LONG: \ -103.7020952 \ ( \ TVD: \ 8900 \ feet \ )$   $BHL: \ SWNW \ / \ 1980 \ FNL \ / \ 990 \ FWL \ / \ TWSP: \ 22S \ / \ SECTION: \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ ( \ TVD: \ 8900 \ feet \ )$ 

Page 1

12/17/24 P&A

# ROCK RIDGE 29 FEDERAL #1 P&A Capital AFE# 187198

Well Name	ROCK RIDGE 29 FEDERAL #1 P&A							
Surface Location	32.36	543074,-103.7021408 NAD83		AFE/Sub Code	187198/231			
RKB – Sea Level		Area/Field Red Tank		Spud Date	7/16/06			
G.L. Elevation	3,572′	County/Province	Lea	Original Rig Contractor	-			
API	30-025-37646	State / Country	NM	Formation				
Comp Date	8/30/06	Total MD	8,927'	Top Perf	8,263′			
КОР	-	Average Lateral TVD	=	Wellhead MFG	-			

STRING NAME	STRING OD	STRING WEIGHT	DESCRIPTION	FINAL DEPTH
SURFACE	13-3/8	48	13-3/8 H40	884'
INTERMEDIATE	8.625	32	8-5/8 K-55	4,605'
PRODUCTION	5.5	17 & 15.5	5 1/2 K55	8,927

Summary of Procedure: Pull TBG, Run CIBP & spot cement plogs, Abandon

# **PROCEDURE:**

- 1. Notify BLM & State 24 hours before beginning work.
- 2. MIRU & Kill well.
- 3. ND/NU WH/BOP
- 4. Release TAC (20M in tension)
- 5. TOOH Entire string of 2-7/8" Production TBG while scanning
- 6. RIH Gauge Ring to 7,800, RIH & set CIBP @ 7,800
- 7. Test to 500 psi
- 8. TIH & spot 25 sxs Class H on top of CIBP. WOC & tag if cibp does not test.
- 9. TOOH & spot 70 sxs class c cement from 4,705 to 4,000' to cover int. shoe, Deleware, & bottom of salt top. WOC & Tag
- 10.TOOH
- 11.RIH & perf @ 1,150'
- 12.TIH & squeeze 57 sxs class c cement from 1150' to 745'. Spot 40 sxs class c on inside to 745'. This will cover the surface shoe & the top of salt. WOC & Tag
- 13.TOOH
- 14.RIH & perf @ 100'
- 15.TIH & squeeze 15 sxs class c cement to surface & then spot 10 sxs class c cement on the inside to surface.
- 16. Dig out cellar, cut off wellhead and verify cement behind all casing strings.
- 17.Install dry hole marker, clean location and RDMO.

Page 2



12/17/24 P&A

**Production Engineer:** 

Date: <u>12/17/24</u>

**Chris Caskey** 

# **AFE Codes**

	PLUG & ABANDON AFEs						
	P&A WELLBORE - COSTS ASSOCIATED WITH RIG WORK TO PLUG THE WELL						
Gen-Sub	Account Title	Comments					
231-406	COMP - FUEL	Fuel used during plugging operations					
231-407	COMP - WATER	Water used during plugging operations					
231-408	COMP - MUD & CHEMICALS	Plugging mud & chemicals used during plugging operations					
231-409	COMP - CEMENTING & SERVICE	Plugging company charges, cement charges, plugs					
231-415	COMP - TRANSPORTATION	Rig Moves, tubing delivery, moving equipment to the next well					
231-417	COMP - EQUIPMENT RENTAL	Trash/Porta Jon, frac tanks, light towers, work strings, any rental not part of the rig package					
231-418	COMP - RIG	Pulling Unit & all related equipment, laydown machine, swivel, reverse unit, BOP, etc.					
231-420	COMP - FISHING/EQUIP LOST IN HOLE	Fishing expenses					
231-421	COMP - SAFETY	Safety Related Equipment not associated with normal rig operations					
231-424	COMP - SUPERVISION	Day rate, Mileage, hotel, etc.					
231-436	COMP - TUBULAR INSPEC/HANDLING	Scanning & Hydro-testing tubing					
231-442	COMP - WIRELINE SERVICES	Wireline work, logging, perforating, etc					
231-444	COMP - TUBING SERVICES	Hot Oiling Rods & Tubing					
231-446	COMP - CONTRACT LABOR	Roustabout Gangs, NU/ND Crew, Anchors, Torq & Test					
231-447	COMP - DISPOSAL COSTS	Disposal Cost including trucking					

Well Name: ROCK RIDGE 29 FEDERAL #1

Location: 1980 FNL 990 FWL

County: Lea, NM

**Lat/Long:** 32.3643074,-103.7021408 NAD83

API #: 30-025-37646 Spud Date: 7/16/06

Compl. Date: 8/30/06

#### **Proposed Wellbore Diagram:**

KB: GL: 3572

17-1/2" Hole

13-3/8" 48# H-40 @ 884' Cmt w/ 886 sx Class C (circ) to surface

11"" Hole

Cement to Surface 8-5/8" 32# J-55 to 4605' Cmt w/ 1,510 sx Class C (circ) to surface eog resources

 Formation Tops

 Top of Salt
 1,100

 Bottom of Salt
 4,373

 Delaware
 4,655

 Bone Spring
 8,504

Sqeeze & spot Class C cement 25 sxs to surface

Perforate @ 100'

WOC & Tag This will cover top of salt and the surface shoe Spot 40 sxs Class C on inside to 745' Squeeze 57 sxs Class C on backsdie

Perforate @ 1,150'

Not to Scale By: CC 12/17/24

WOC & TAG
Covers Int Shoe, Delaware, &
Bottom of salt
Spot 70 sxs Class C from 4705 to 4000'

5-1/2" 17# & 15.5# J55 Prod CSG to 8,927'; 875 sx Class C cmt to 3918

7-7/8" Vertical to 8,927

WOC & Tag - only if CIBP doesn't test Spot 25 sxs Class H from 7800 to 7573 Set CIBP @ 7,800' Perforate 7,812' to 7,820' - 16 holes

Perforate 8,454 to 8,464' 20 Holes

1,100 4,373

4,655 8,504

Well Name: ROCK RIDGE 29 FEDERAL #1

 Location:
 1980 FNL
 990 FWL


 County:
 Lea, NM

Lat/Long: 32.3643074,-103.7021408 NAD83 API #: 30-025-37646

Spud Date: 7/16/06 Compl. Date: 8/30/06

-3/646

#### **Current Wellbore Diagram:**

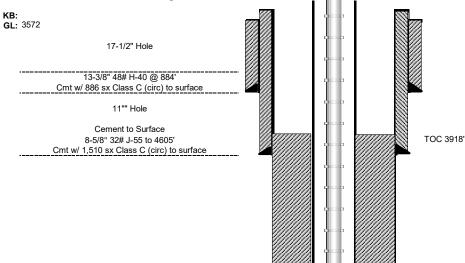

Not to Scale By: CC 12/17/24

**eog resources** 

Top of Salt

Delaware

Bone Spring

Bottom of Salt

Formation Tops

5-1/2" 17# & 15.5# J55 Prod CSG to 8,927'; 875 sx Class C cmt to 3918

7-7/8" Vertical to 8,927

Perforate 7,812' to 7,820' - 16 holes

Perforate 8,454 to 8,464' 20 Holes TAC set in 20 pts tension 2-7/8" TBG to 8,597 on 12/4/23



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT Sundry Print Repor

Well Name: ROCK RIDGE 29 Well Location: T22S / R32E / SEC 29 /

SWNW / 32.3643766 / -103.7020952 **FEDERAL** 

County or Parish/State: LEA /

Well Number: 01 Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM96856 **Unit or CA Name: Unit or CA Number:** 

**US Well Number: 3002537646 Operator: EOG RESOURCES** 

INCORPORATED

#### **Notice of Intent**

**Sundry ID: 2827788** 

Type of Submission: Notice of Intent Type of Action: Plug and Abandonment

Date Sundry Submitted: 12/17/2024 Time Sundry Submitted: 07:27

Date proposed operation will begin: 01/01/2025

Procedure Description: EOG proposes to P&A this wellbore using the attached procedure. Current and proposed wellbore attached.

# **Surface Disturbance**

Is any additional surface disturbance proposed?: No

# **NOI Attachments**

#### **Procedure Description**

ROCK\_RIDGE\_29\_FEDERAL\_\_1\_PA\_Proc\_20241217072729.pdf

Rock\_Ridge\_29\_Fed\_\_1\_Proposed\_Wellbore\_Diagram\_20241217072711.pdf

Rock\_Ridge\_29\_Fed\_\_1\_Current\_Wellbore\_Diagram\_20241217072700.pdf

APPROVAL SUBJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS ATTACHED

Page 1 of 2

eived by OCD: 2/18/2025 3:40:13 PM Well Name: ROCK RIDGE 29

**FEDERAL** 

Well Location: T22S / R32E / SEC 29 / SWNW / 32.3643766 / -103.7020952

County or Parish/State: Page 11 of

Well Number: 01

Type of Well: OIL WELL

**Allottee or Tribe Name:** 

Lease Number: NMNM96856

**Unit or CA Name:** 

**Unit or CA Number:** 

**US Well Number: 3002537646** 

**Operator: EOG RESOURCES INCORPORATED** 

**Operator** 

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Signed on: DEC 17, 2024 07:27 AM **Operator Electronic Signature: ALVINO GARCIA** 

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS BLVD

City: MIDLAND State: TX

Phone: (432) 236-2924

Email address: ALVINO\_GARCIA@EOGRESOURCES.COM

**Field** 

**Representative Name:** 

**Street Address:** 

City:

State:

Zip:

Phone:

**Email address:** 

APPROVED by Long Vo Petroleum Engineer Carlsbad Field Office 575-988-50402 LVO@BLM.GOV

Form 3160-5 (June 2019)

# **UNITED STATES** DEPARTMENT OF THE INTERIOR

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 202

BUREAU OF LAND MANAGEMENT			5. Lease Serial No.	5. Lease Serial No.			
Do not use this f	OTICES AND REPOR form for proposals to Use Form 3160-3 (API	drill or to re-enter an		6. If Indian, Allottee or Tribe Name			
SUBMIT IN 1	TRIPLICATE - Other instruct	ions on page 2	7. If Unit of CA/Agreement,	Name and/or No.			
1. Type of Well  Oil Well  Gas Well  Other			8. Well Name and No.				
2. Name of Operator			9. API Well No.				
3a. Address	38	o. Phone No. (include area code	2) 10. Field and Pool or Explora	atory Area			
4. Location of Well (Footage, Sec., T.,R	.,M., or Survey Description)		11. Country or Parish, State				
12. CHE	CK THE APPROPRIATE BOX	(ES) TO INDICATE NATURE	OF NOTICE, REPORT OR OT	THER DATA			
TYPE OF SUBMISSION		TY	PE OF ACTION				
Notice of Intent	Acidize Alter Casing	Deepen Hydraulic Fracturing	Production (Start/Resume) Reclamation	Water Shut-Off Well Integrity			
Subsequent Report	Casing Repair	New Construction	Recomplete	Other			
Final Abandonment Notice	Change Plans Convert to Injection	Plug and Abandon Plug Back	Temporarily Abandon Water Disposal				
completion of the involved operation	ons. If the operation results in a cices must be filed only after all	multiple completion or recomp requirements, including reclan	letion in a new interval, a Form	ust be filed within 30 days following 3160-4 must be filed once testing has been the operator has detennined that the site			
14. I hereby certify that the foregoing is	true and correct. Iname (Frime	Title					
Signature		Date					
	THE SPACE F	OR FEDERAL OR ST	ATE OFICE USE				
Approved by Long Vo	2	Title P	etroleum Engineer	2/18/2025 Date			
Conditions of approval, if any, are attach certify that the applicant holds legal or e which would entitle the applicant to con	equitable title to those rights in	es not warrant or the subject lease Office	Carlsbad Field Office				
Title 18 U.S.C Section 1001 and Title 43	3 U.S.C Section 1212, make it a	a crime for any person knowing	ly and willfully to make to any c	lepartment or agency of the United States			

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

#### **GENERAL INSTRUCTIONS**

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

#### SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

#### **NOTICES**

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

## **Additional Information**

#### **Location of Well**

 $0. \ SHL: \ SWNW \ / \ 1980 \ FNL \ / \ 990 \ FWL \ / \ TWSP: \ 22S \ / \ RANGE: \ 32E \ / \ SECTION: \ 29 \ / \ LAT: \ 32.3643766 \ / \ LONG: \ -103.7020952 \ ( \ TVD: \ 8900 \ feet \ )$   $BHL: \ SWNW \ / \ 1980 \ FNL \ / \ 990 \ FWL \ / \ TWSP: \ 22S \ / \ SECTION: \ / \ LAT: \ 0.0 \ / \ LONG: \ 0.0 \ ( \ TVD: \ 8900 \ feet \ )$ 

Page 1



12/17/24 P&A

# ROCK RIDGE 29 FEDERAL #1 P&A Capital AFE# 187198

Well Name	ROCK RIDGE 29 FEDERAL #1 P&A							
Surface Location	32.36	543074,-103.7021408 NAD83		AFE/Sub Code	187198/231			
RKB – Sea Level		Area/Field Red Tank		Spud Date	7/16/06			
G.L. Elevation	3,572′	County/Province	Lea	Original Rig Contractor	-			
API	30-025-37646	State / Country	NM	Formation				
Comp Date	8/30/06	Total MD	8,927'	Top Perf	8,263′			
КОР	-	Average Lateral TVD	-	Wellhead MFG	-			

STRING NAME	STRING OD	STRING WEIGHT	DESCRIPTION	FINAL DEPTH
SURFACE	13-3/8	48	13-3/8 H40	884'
INTERMEDIATE	8.625	32	8-5/8 K-55	4,605'
PRODUCTION	5.5	17 & 15.5	5 1/2 K55	8,927

Summary of Procedure: Pull TBG, Run CIBP & spot cement plogs, Abandon

# **PROCEDURE:**

- 1. Notify BLM & State 24 hours before beginning work.
- 2. MIRU & Kill well.
- 3. ND/NU WH/BOP
- 4. Release TAC (20M in tension)
- 5. TOOH Entire string of 2-7/8" Production TBG while scanning
- 6. RIH Gauge Ring to 7,800, RIH & set CIBP @ 7762'.
- 7. Test to 500 psi
- 8. TIH & spot 25 sxs Class H on top of CIBP. WOC & tag if cibp does not test.
- 9. TOOH & spot 70 sxs class c cement from 4,705 to 4,000' to cover int. shoe, Deleware, & bottom of salt top. WOC & Tag
- 10.TOOH
- 11.RIH & perf @ 1,150'
- 12.TIH & squeeze 57 sxs class c cement from 1150' to 745'. Spot 41 sxs class c on inside to 745'. This will cover the surface shoe & the top of salt. WOC & Tag
- 13.TOOH
- 14.RIH & perf @ 100'
- 15.TIH & squeeze 15 sxs class c cement to surface & then spot 10 sxs class c cement on the inside to surface.
- 16. Dig out cellar, cut off wellhead and verify cement behind all casing strings.
- 17. Install dry hole marker, clean location and RDMO.

Run CBL from CIBP to surface.

eog resources

Page 2

12/17/24 P&A

Production Engineer: Date: 12/17/24

**Chris Caskey** 

# **AFE Codes**

	PLUG & ABANDON AFEs						
	P&A WELLBORE - COSTS ASSOCIATED WITH RIG WORK TO PLUG THE WELL						
Gen-Sub	Account Title	Comments					
231-406	COMP - FUEL	Fuel used during plugging operations					
231-407	COMP - WATER	Water used during plugging operations					
231-408	COMP - MUD & CHEMICALS	Plugging mud & chemicals used during plugging operations					
231-409	COMP - CEMENTING & SERVICE	Plugging company charges, cement charges, plugs					
231-415	COMP - TRANSPORTATION	Rig Moves, tubing delivery, moving equipment to the next well					
231-417	COMP - EQUIPMENT RENTAL	Trash/Porta Jon, frac tanks, light towers, work strings, any rental not part of the rig package					
231-418	COMP - RIG	Pulling Unit & all related equipment, laydown machine, swivel, reverse unit, BOP, etc.					
231-420	COMP - FISHING/EQUIP LOST IN HOLE	Fishing expenses					
231-421	COMP - SAFETY	Safety Related Equipment not associated with normal rig operations					
231-424	COMP - SUPERVISION	Day rate, Mileage, hotel, etc.					
231-436	COMP - TUBULAR INSPEC/HANDLING	Scanning & Hydro-testing tubing					
231-442	COMP - WIRELINE SERVICES	Wireline work, logging, perforating, etc					
231-444	COMP - TUBING SERVICES	Hot Oiling Rods & Tubing					
231-446	COMP - CONTRACT LABOR	Roustabout Gangs, NU/ND Crew, Anchors, Torq & Test					
231-447	COMP - DISPOSAL COSTS	Disposal Cost including trucking					

Well Name: ROCK RIDGE 29 FEDERAL #1

Location: 1980 FNL 990 FWL

County: Lea, NM

**Lat/Long:** 32.3643074,-103.7021408 NAD83

**API #**: 30-025-37646

#### **Proposed Wellbore Diagram:**

KB: GL: 3572

17-1/2" Hole

13-3/8" 48# H-40 @ 884' Cmt w/ 886 sx Class C (circ) to surface

11"" Hole

Cement to Surface 8-5/8" 32# J-55 to 4605' Cmt w/ 1,510 sx Class C (circ) to surface



 Formation Tops

 Top of Salt
 1,100

 Bottom of Salt
 4,373

 Delaware
 4,655

 Bone Spring
 8,504

Sqeeze & spot Class C cement 25 sxs to surface

Perforate @ 100'

WOC & Tag

This will cover top of salt and the surface shoe Spot 41 sxs Class C on inside to 745' Squeeze 57 sxs Class C on backsdie Perforate @ 1,150'

WOC & TAG

Covers Int Shoe, Delaware, & Bottom of salt

Spot 70 sxs Class C from 4705 to 4000'

Not to Scale By: CC 12/17/24

5-1/2" 17# & 15.5# J55 Prod CSG to 8,927'; 875 sx Class C cmt to 3918

7-7/8" Vertical to 8,927

WOC & Tag - only if CIBP doesn't test Spot 25 sxs Class H from 7762 to 7573 Set CIBP @ 7,800' Perforate 7,812' to 7,820' - 16 holes

Perforate 8,454 to 8,464' 20 Holes

Well Name: ROCK RIDGE 29 FEDERAL #1

Location: 1980 FNL 990 FWL

County: Lea, NM

32.3643074,-103.7021408 NAD83 Lat/Long:


API#: 30-025-37646 Spud Date: 7/16/06

Compl. Date: 8/30/06

#### **Current Wellbore Diagram:**


5-1/2" 17# & 15.5# J55 Prod CSG to 8,927';

875 sx Class C cmt to 3918 7-7/8" Vertical to 8,927

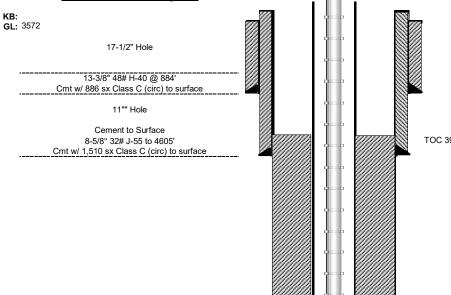

Perforate 7,812' to 7,820' - 16 holes

Perforate 8,454 to 8,464' 20 Holes TAC set in 20 pts tension 2-7/8" TBG to 8,597 on 12/4/23

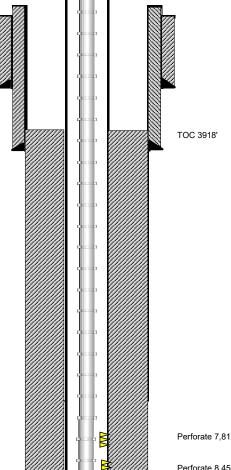

**eog resources** 

Formation	Tops
Top of Salt	1,100
Bottom of Salt	4,373
Delaware	4,655
Bone Spring	8,504
	- /

Not to Scale By: CC 12/17/24

# BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

# Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-689-5981.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours for Class C or accelerated cement (calcium chloride) and 6 hours for Class H. Tagging the plug means running in the hole with a string of tubing or drill pipe and placing sufficient weight on the plug to ensure its integrity. Other methods of tagging the plug may be approved by the BLM authorized officer or BLM field representative.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

Fluid used to mix the cement in R111Q shall be saturated with the salts common to the section penetrated, and in suitable proportions but not less than 1% and not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified *BY PHONE* (numbers listed in 2. Notifications) a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds). A weep hole shall be left if a metal plate is welded in place.

- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



# **United States Department of the Interior**

#### BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

#### **Reclamation Objectives and Procedures**

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its pre-disturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any/all contaminants, scrap/trash, equipment, pipelines and powerlines (Contact service companies, allowing plenty of time to have the risers and power lines and poles removed prior to reclamation, don't wait till the last day and try to get them to remove infrastructure). Strip and remove caliche, contour the location to blend with the surrounding landscape, re-distribute the native soils, provide erosion control as needed, rip (across the slope and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or

concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos

Supervisory Petroleum Engineering Tech/Environmental Protection Specialist 575-234-5909 (Office), 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Crisha Morgan Environmental Protection Specialist 575-234-5987

Jose Martinez-Colon Environmental Protection Specialist 575-234-5951

Mark Mattozzi Environmental Protection Specialist 575-234-5713

Robert Duenas Environmental Protection Specialist 575-234-2229

Doris Lauger Martinez Environmental Protection Specialist 575-234-5926

Jaden Johnston Environmental Protection Asst. (Intern) 575-234-6252

Released to Imaging: 3/19/2025 7:54:24 AM

Sundry ID	2827788	T	I	T		ı	
Plug Type	Тор	Bottom	Length	Tag	Sacks	Cement Class	Notes
Surface Plug	0.00		100.00	Tag/Verify	25.00	С	Perf and squeeze from 100' to surface. Verify at surface. (In 10 sxs/Out 15 sxs)
Top of Salt @ 877	818.23	927.00	108.77	Tag/Verify			Perf and squeeze
13.375 inch- Shoe Plug	825.16	1150.00	324.84	Tag/Verify	96.00	С	from 1150' to 745'. WOC and Tag. (In 41 sxs/Out 55 sxs)
Base of Salt @ 4373	4000.00	4423.00	423.00	Tag/Verify			
8.625 inch- Shoe Plug	4508.95	4655.00		Tag/Verify			
Delaware @ 4655	4558.45			base no need to	70.00	C	Spot cement from 4705' to 4000'. WOC and Tag.
Perforations Plug (If No CIBP)	7691.80			Tag/Verify	70.00	0	WOC and Tag.
CIBP Plug	7727.00	7762.00	35.00	If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio	25.00	L. L	Set CIBP at 7762'. Leak test CIBP. Spot cement from 7762' to 7691'. Run CBL from CIBP to surface.
					23.00	11	surface.
Perforations Plug (If No CIBP)	8329.36	8514.00	184.04	Tag/Verify  If solid base no need to Tag (CIBP present and/or Mechanic al Integrity Test), If Perf & Sqz then Tag, Leak Test all CIBP if no Open Perforatio			
Bonesprings @ 8504	8368.96	8554.00	185.04				
5.5 inch- Shoe Plug	8787.73	8977.00	189.27	Tag/Verify			

No more than 2000' is to be allowed between plugs in open hole, and no more than 3000' between plugs in cased hole. Class H >7500' Class C<7500'

Fluid used to mix the cement in R111P shall be saturated with the salts common to the section penetrated, and in suitable proportions, but not more than 3% calcium chloride by weight of cement will be considered the desired mixture whenever possible.

Medium, Secretary: Top of salt to surface If no salt take the deepest fresh water or Karst Depth

High, Critical: Bottom of Karst to surface or Deepest fresh water, whichever is greater R111P: 50 Feet from Base of Salt to surface.

Class C: 1.32 ft^3/sx Class H: 1.06 ft^3/sx

Onshore Order 2.III.G Drilling Abandonment Requirements: "All formations bearing usable-quality water, oil, gas, or geothermal resources, and/or a prospectively valuable deposit of minerals shall be protected.

Cave Karst/Potash Cement Requirement:	Low		
13.375 inch- Shoe Plug @	884.00		
8.625 inch- Shoe Plug @	4605.00		
5.5 inch- Shoe Plug @	8927.00	тос @	3918.00
		Perforations	
Perforatons Top @	7812.00	Bottom @ Perforations	7820.00
Perforatons Top @	8454.00	Bottom @	8464.00
		CIBP @	7762.00

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

# State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 433278

#### **CONDITIONS**

Operator:	OGRID:	
EOG RESOURCES INC	7377	
5509 Champions Drive	Action Number:	
Midland, TX 79706	433278	
	Action Type:	
	[C-103] NOI Plug & Abandon (C-103F)	

#### CONDITIONS

Created By	Condition	Condition Date
gcordero	Run CBL from 7762' - Surface	3/13/2025
gcordero	Spot 15 sx cmt 6950' - 6850' - T Brushy Canyon Spot 15 sx cmt 5600' - 5500' - T Cherry Canyon	3/13/2025
gcordero	A Cement Bond Log (CBL) is required to be submitted to electronic permitting.	3/13/2025
gcordero	Submit Cement Bond Logs (CBL) prior to submittal of C-103P.	3/13/2025