


Hondo Drilling Company
Midway - State "A" 1
1600' FSL & 700' FEL
Sec 8, T17S, R37E
P&A 5-4-66

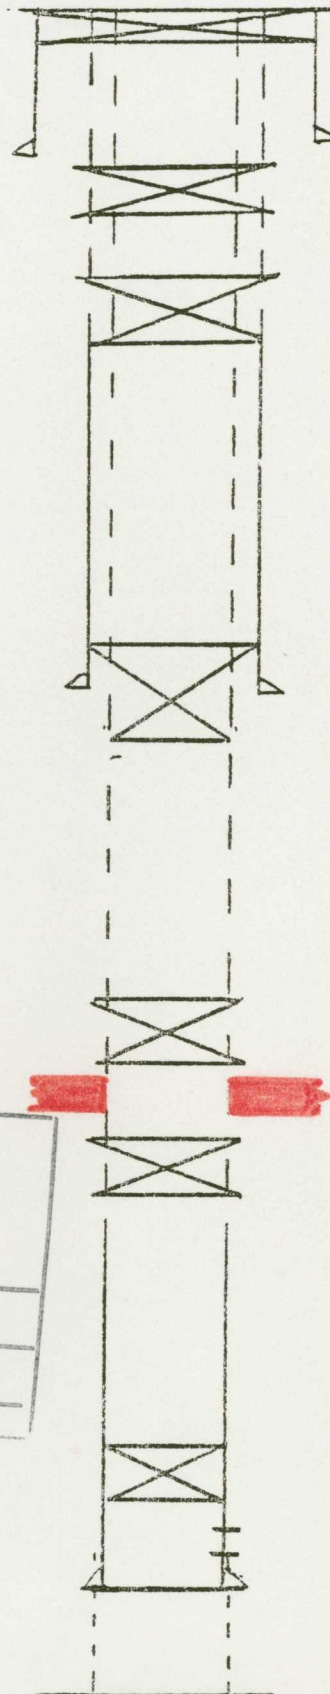

10 sx cmt plug at surface

11-3/4" @ 329' w/250 sxs
25 sx cmt plug 360'-330'

25 sx cmt plug 1260'-1230'
8-5/8" csg cut & pulled from 1250'

25 sx cmt plug 4400'-4325'
8-5/8" @ 4399' w/375 sx

25 sx cmt plug 6460'-6385'

25 sx cmt plug 7800'-7725'

4-1/2" csg cut & pulled from 7850'

50 sx cmt plug. Top @ 8072'
Abo perfs 8495'-8618'

4-1/2" @ 8680' W/165 sx

BEFORE EXAMINER STAMETS
OIL CONSERVATION DIVISION


Appel EXHIBIT NO. 1

CASE NO. 8248

Submitted by Mutter

Hearing Date 7/11/84

David Fasken
Consolidated State # 1
2310' FNL & 330' FWL
Sec 9, T17S, R37E
P&A 3-2-81

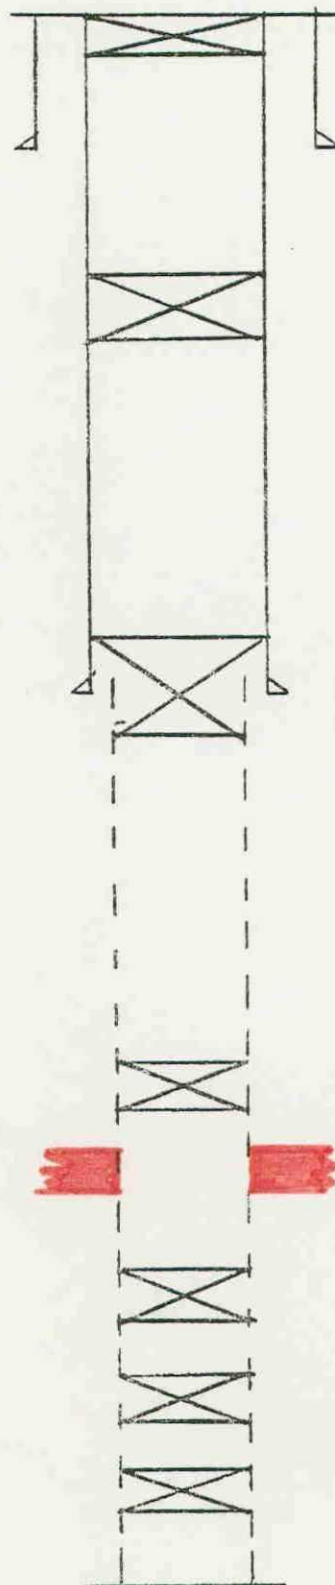

Plug # 7 35'-0' w/10 sx

13-3/8" csg @ 398' w/350 sx, circ

Plug # 6 1400'-1300' w/30 sx

8-5/8" @ 4462' w/1600 sx, circ
plug # 5 4512'-4412' w/40 sx

Plug # 4 6404'-6304' w/50 sx

Plug # 3 8918'-8818' w/40 sx

Plug # 2 9140'-9040' w/40 sx

Plug # 1 10,754'-10,654' w/35 sx

Open hole (7-7/8")

TD 11,073'

Supron Energy Corporation
Lovington 9 State No. 1
500' FSL & 500' FWL
Sec 9, T17S-R37E
P&A 12-19-76

10 sx cmt plug @ surface

65 sx cmt plug 240'-360'
13-3/8" @ 303' w/250 sx circ.

45 sx cmt plug 950'-1060'
8-5/8" csg cut & pulled from 1010'

50 sx cmt plug 3425'-3594'
8-5/8" @ 3548' w/400 sx

50 sx cmt plug 5820'-6175'
4-1/2" csg cut & pulled from 6175

CIBP @ 8794' w/35 sx cmt on top

Abo perfs 8813'-8904'

TD 9217'