


Submit 3 Copies To Appropriate District Office
 District I
 1625 N. French Dr., Hobbs, NM 88240
 District II
 1301 W. Grand Avenue, Artesia, NM 88210
 District III
 1000 Rio Brazos Rd., Alamogordo, NM 88001
 District IV
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources
 OIL CONSERVATION DIVISION
 220 South St. Francis Dr.
 Santa Fe, NM 87505

Form C-103
 Revised March 25, 1999



WELL API NO. 30-015-10449
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. E1284
7. Lease Name or Unit Agreement Name: Fulton Collier State
8. Well No. 2
9. Pool name or Wildcat Loco Hills
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 3644 GR

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
 Oil Well ☐ Gas Well ☒ Other ☐

2. Name of Operator
 Yates Energy Corporation

3. Address of Operator
 P. O. Box 2323, Roswell, New Mexico 88202

4. Well Location
 Unit Letter 0 : 1980 feet from the East line and 660 feet from the South line
 Section 1 Township 18X Range 28E NMPM County Eddy

10. Elevation (Show whether DR, RKB, RT, GR, etc.)
 3644 GR

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐ OTHER: ☐	SUBSEQUENT REPORT OF: REMEDIAL WORK ☐ ALTERING CASING ☐ COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐ CASING TEST AND CEMENT JOB ☐ OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1.) CIBP set at 2185' with 35' of cement on top.
- 2.) 25 sack cement plug from 894' to 794'. Tag
- 3.) 25 sacks cement plug from 702' to 602'. Tag
- 4.) 75 sacks cement plug from 212' to 312'. - Tag
- 5.) 25 sacks cement plug from 60' to 0'. - WOC - 24 HRS - TAG

Notify OCD 24 hrs. prior to any work done

Salt gel mud consisting of 10#
 Brine W/25# of gel per bbl
 must be placed between each plug

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Sheryl L. Jonas TITLE Agent for Yates Energy DATE 04/25/03

Type or print name Sheryl L. Jonas
 (This space for State use)

Telephone No. (915) 683-5511

APPROVED BY [Signature] TITLE Field Rep
 Conditions of approval, if any:

MAY 9 2003


WELL COMPLETION SKETCHES SUN-5036-4-A

WELL


Fulton Collier #2

FIELD

DATE

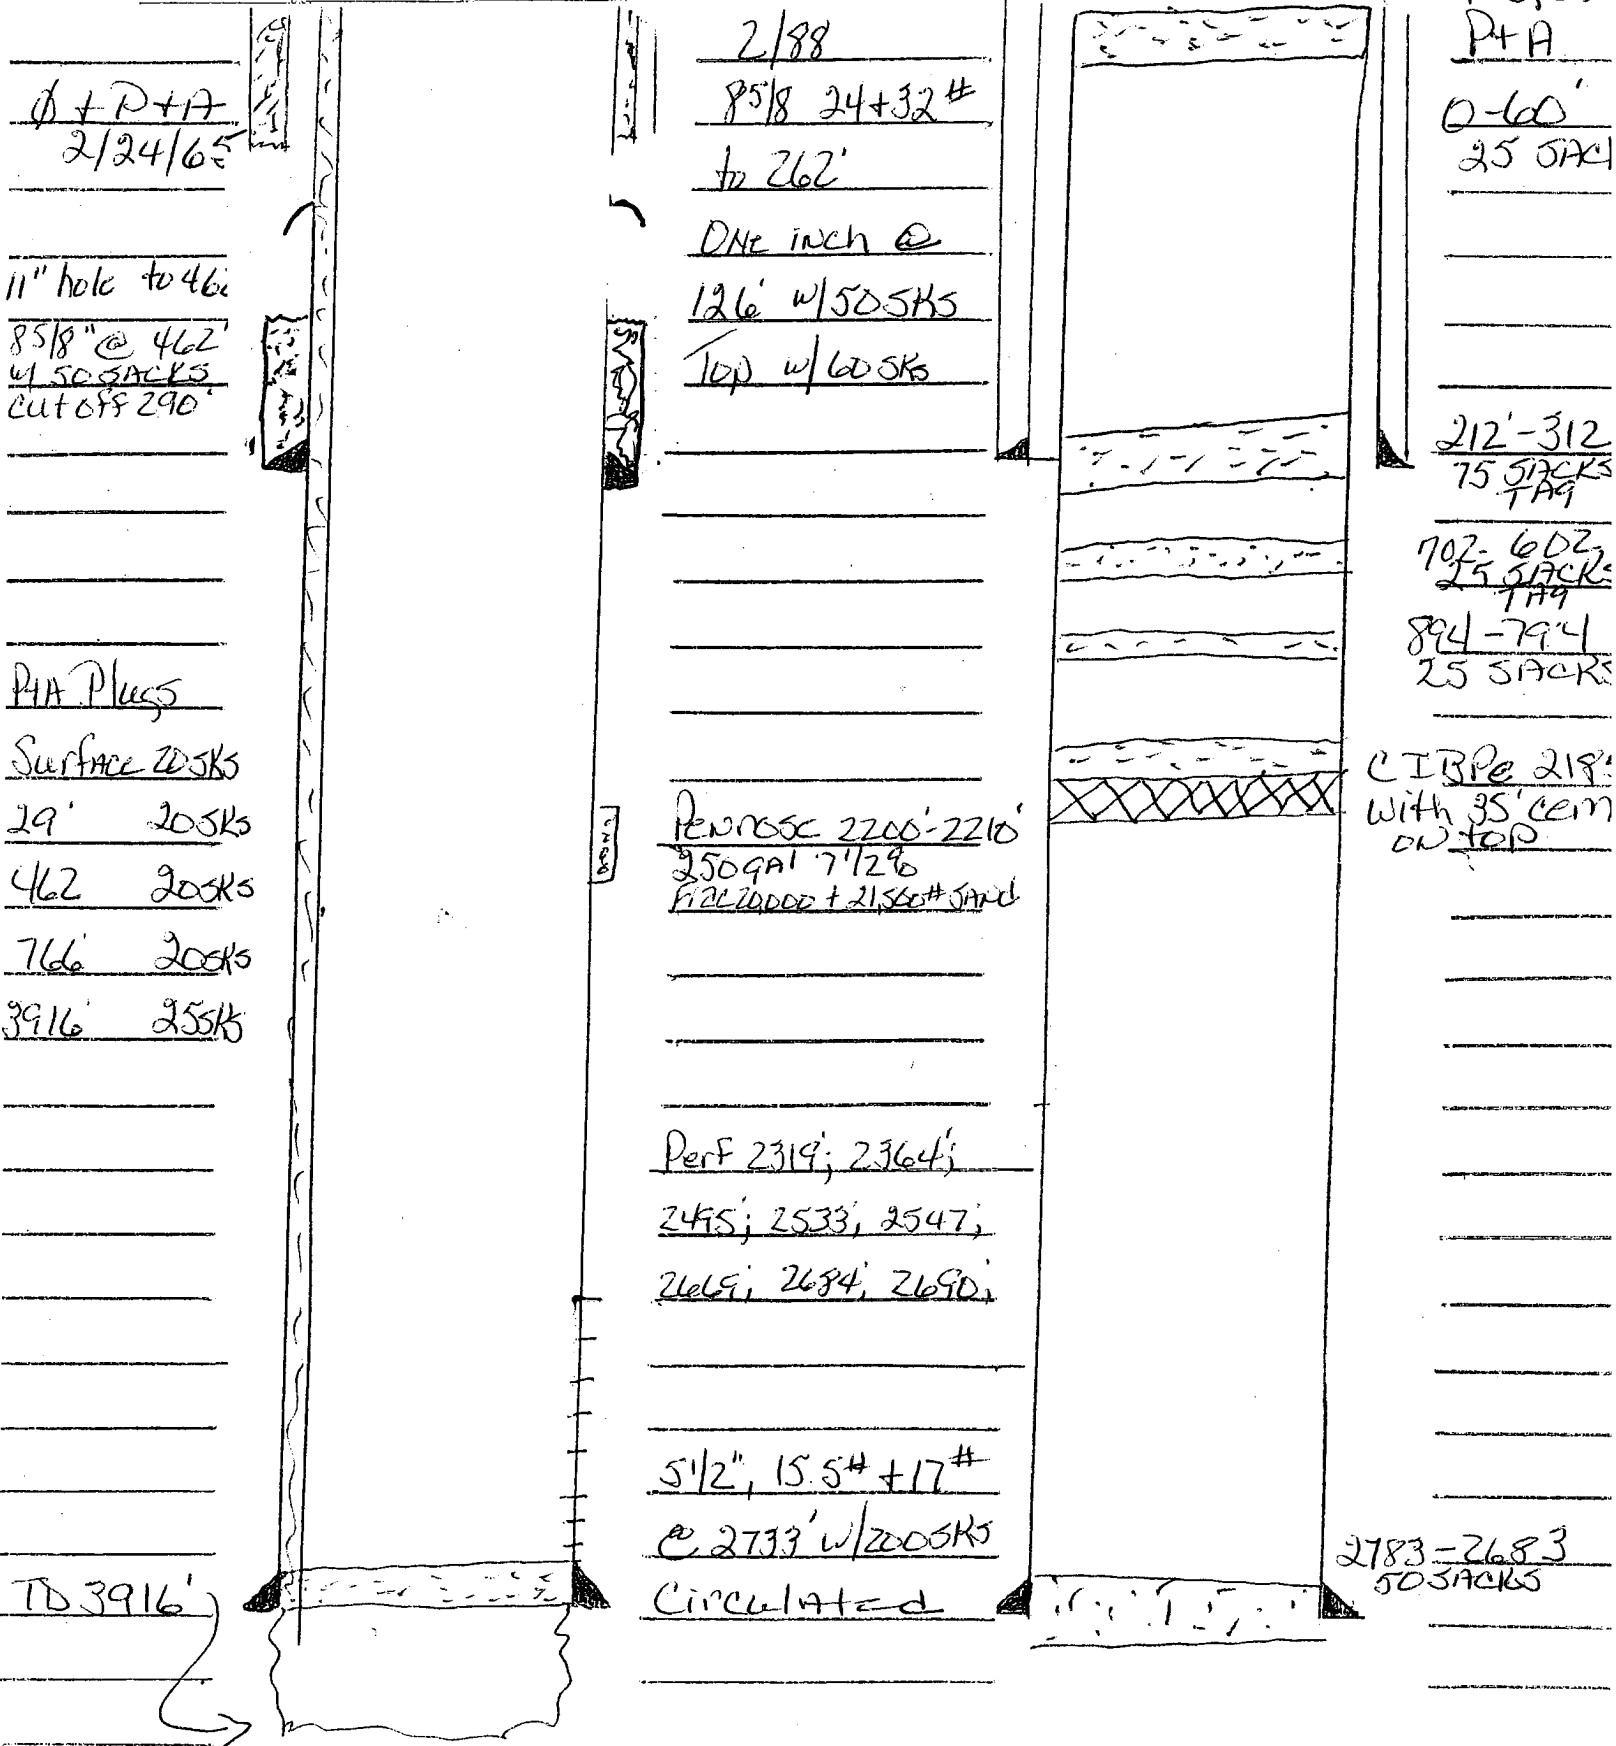☐ PRESENT COMPLETION☐ SUGGESTED COMPLETION

OPERATOR: Yates Petroleum Corp.Inc.		API# 30-015-10449	
WELL: Fulton-Collier State # 2		LOCATION: O-1-18-28	
SURFACE CSG-HOLE SIZE	" CSG. SIZE 8 5/8"	SET @ 262'	SX. CMT. TOC. Circ
LONG STRING- HOLE SIZE	" CSG. SIZE 5.5"	SET @ 2733'	SX. CMT. TOC. Circ.
OTHER-			

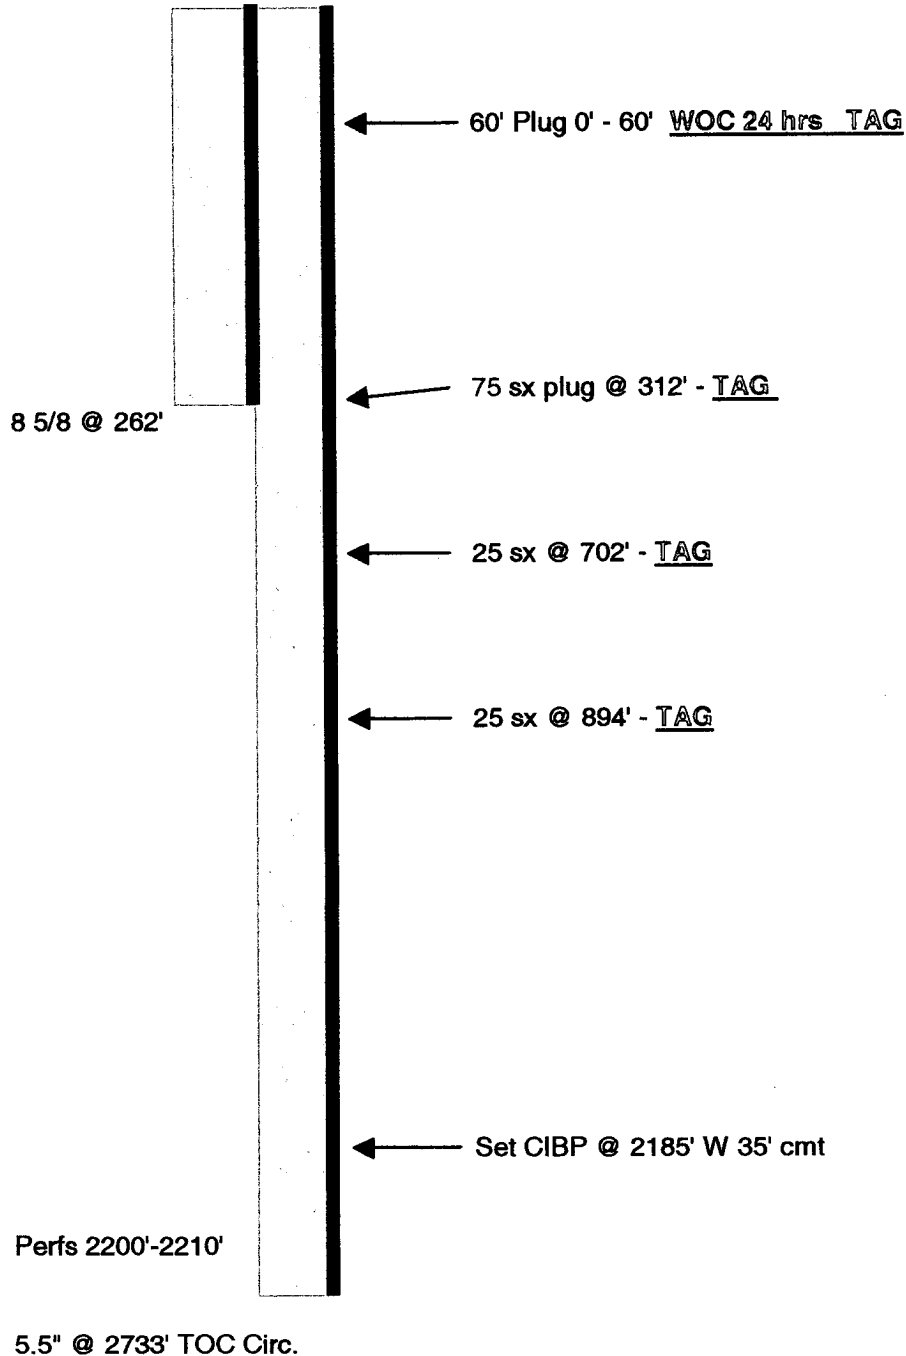

TOPS

Fresh Wtr. _____

T. Salt-----652'

B. Salt-----682'

Yates-----865'

Glorieta -----

Delaware-----'

Bone Sp.-----'

Abo -----'

Wolfcamp -----'

Morrow-----'

Devonian-----

Fusselman-----

Other-----