

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N French Dr, Hobbs, NM 88240
District II - (575) 748-1283
811 S First St, Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd, Aztec, NM 87410
District IV - (505) 476-3460
1220 S St. Francis Dr, Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)		WELL API NO. 30 - 015 - 32451
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☒
2. Name of Operator Nadel and Gussman Permian, LLC		6. State Oil & Gas Lease No.
3. Address of Operator 601 N. Marienfeld Suite 508, Midland, TX 79701		7. Lease Name or Unit Agreement Name Bond ✓
4. Well Location Unit Letter <u>XF</u> : 1980 feet from the North line and 1860 feet from the West line Section 20 Township 21 S Range 28 E NMPM County Eddy		8. Well Number 1 ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3320' (GR)		9. OGRID Number 155615 ✓
		10. Pool name or Wildcat Bass Strawn

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:
REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐


OTHER: ☐

OTHER: Request TA Status ☒

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

9/1/11: Pressure test csg to 520 psi for 30 minutes, had no leak off.
Notified NMOCD to witness test, test was witnessed by Richard Inge.
Please see attached wellbore diagram and pressure chart.

Temporary Abandoned Status Approved
Until 8/1/2013

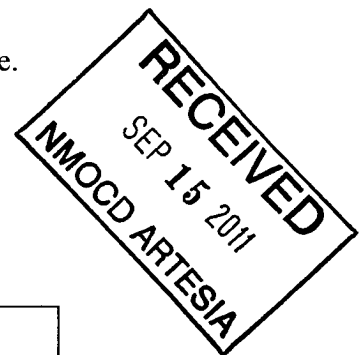

Spud Date:

N/A

Rig Release Date:

N/A

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Chris Marquez TITLE Drilling Engineer DATE 9/14/11

Type or print name Chris Marquez E-mail address: cmarquez@naguss.com PHONE: (432) 682-4429

For State Use Only

APPROVED BY: Richard Inge TITLE COMPLIANCE OFFICER DATE 9/15/11

Conditions of Approval (if any):

Nadel & Gussman Permian, L.L.C.

LEASE	Bond
FIELD	Bass Strawn
LOCATION	1980 FNL 1860 FWL
SPUD DATE	9/27/2002
CONTRACTOR	

WELL NO	1
COUNTY	Eddy
LEGAL	Sec 20 T21 S R 28 E
DRAWN BY	Chris Marquez
DATE	8/25/2011

API #	30 - 015 - 32451
STATE	New Mexico
GL	3320'
DF	
KB	+12.5

Bond Well No. 1

Hole Size
Csg Design

17-1/2" Hole
13-3/8", 48#
H-40 ST&C
Set @ 506' w/
400 sxs circ

7" Toc @ 1444
by CBL

12-1/4" hole
9-5/8", 40#
J-55, LT&C
Set @ 3011'
Cmt w/ 1135 sxs
Circ

DV Tool @ 5586'

7", 26#
P-110 LT&C
8-3/4" Hole
Cmt w/ 1455 sxs

TD @ 10,770'

All depths include 12.47' of KB

TUBING DETAILS

ITEM	NOM OD in	PPF	GRD	MAX OD	MIN ID	LENGTH	BTM DEPTH
1 Kawasaki Fox 13%Cr	2-7/8	6 5	13Cr	3.297	2.441	31.64	44.1
2 Kawasaki Fox 13%Cr Subs	2-7/8	6 5	13Cr	3.297	2.441	33	72.8
3 Kawasaki Fox 13%Cr	2-7/8	6.5	13Cr	3.297	2.441	10498.5	10571.4
4 Xvr Fox x 8rd 13% CR	2-7/8	6 5#	13Cr	3.5	2.441	0.85	10572.2
5 Baker Mod L-10 on/off tool							
w/ 2.313 X profile 13% Cr	5.5	na	13Cr	5.5	2.313	1.8	10574.0
6 2-7/8" B x 2-7/8" 6.5# BTS pin 13% Cr							
seal assembly size 80-32 E22S							
w/ 2 Ryte seal units & 1/2 MS	4.624	na	13Cr	4.624	2.406	0.99	10575.0
7 Baker Mod D pkr w/ Atlas pking element							
size 84-32 middle element							
at 10,575	5.687	na	13Cr	5.687	3.25	3.06	10578.1
8 Baker 94-32 Mod. DB guide shoe							
2-7/8" Vam Box	5.667	na	13Cr	5.667	2.441	0.99	10579.1
9 8" 2-7/8" pup jt Vam B X P	3.5	7 7	13Cr	3.25	2.374	7.46	10586.5
10 2.313 BX Seating Nipple							
Vam Box x 2-7/8" EUE Pin	3.5	na	13Cr	3.25	2.313	1.14	10587.7
11 8" 2-7/8" pup jt Vam B X P	3.5	7 7	13Cr	3.25	2.374	8.11	10595.8
12 2.313 BXN Seating Nipple							
Vam Box x 2-7/8" EUE Pin	3.5	na	13Cr	3.25	2.205	1.14	10596.9
13 2-7/8" Dual Magnumdisk							
tbg plug 2-7/8" B x P	3.5	na	13Cr	3.67	2.441	1.82	10598.7
14 2-7/8" WRE Guide							
15 WRE guide	3.668	na	na	3.668	2.441	0.66	10599.4

Strawn OH

10,685-10,770