

A GYRO TECHNOLOGIES, INC. COMPANY

PO Box 261021
Corpus Christi, Texas 78426
(361) 767-0602 • (800) 606-GYRO • Fax (361) 767-0612

30-015-40385

October 4, 2012

Devon Energy Production Co., L.P.
333 West Sheridan Ave
Oklahoma City, Oklahoma 73102-5010

Attn: Patti Riechers

Re: Cotton Draw Unit No. 159H

Please find enclosed a copy of the survey from 0.00' to 8250.00' ran on the above referenced well.

If I can be of any further service please do not hesitate to call me at 800-606-4976.


Sincerely,



Keith Havelka
Operations

STATE OF TEXAS §

COUNTY OF NUECES §

This instrument was acknowledged before me on the 5th day of October
A.D., 2012, by Keith Havelka




Laura Ballew
Notary Public, State of Texas





Company: Devon Energy Production Co., LP

Lease/Well: Cotton Draw Unit / No. 159H

Rig Name: H&P 214

State/County: New Mexico / Eddy

Latitude: 32.12, Longitude: 0.00

GRID North is 0.32 Degrees East of True North

VS-Azi: 359.78 Degrees



RKB : 25'

DRILLOG HA GYRO SURVEY CALCULATIONS

Filename: final survey.ut

Minimum Curvature Method

Report Date/Time: 10/4/2012 / 11:34


Vaughn Energy Services

Gardendale, Texas

817-741-3610

Surveyor: Ray Seago

Cotton Draw Unit No. 159H / API 30-015-40385



Measured Depth FT	Incl Angle Deg	Drift Direction Deg	TVD FT	+N/-S FT	+E/-W FT	Vertical Section FT	Closure Distance FT	Closure Direction Deg	Dogleg Severity Deg/100
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	****
100.00	0.11	87.36	100.00	0.00	0.10	0.00	0.10	87.36	0.11
200.00	0.22	174.71	200.00	-0.19	0.21	-0.19	0.28	131.04	0.25
300.00	0.42	106.94	300.00	-0.49	0.58	-0.49	0.76	129.87	0.40
400.00	0.62	39.17	399.99	-0.17	1.28	-0.18	1.29	97.79	0.60
500.00	0.88	22.06	499.99	0.96	1.91	0.95	2.13	63.31	0.34
600.00	1.15	4.96	599.97	2.67	2.28	2.66	3.51	40.54	0.40
700.00	1.39	14.96	699.95	4.83	2.68	4.82	5.53	29.02	0.33
800.00	1.63	24.97	799.91	7.29	3.59	7.28	8.13	26.24	0.36
900.00	1.70	28.69	899.87	9.88	4.90	9.86	11.03	26.40	0.13
1000.00	1.77	32.41	999.82	12.48	6.44	12.45	14.04	27.30	0.13
1100.00	1.72	34.61	1099.78	15.01	8.12	14.98	17.06	28.40	0.08
1200.00	1.66	36.80	1199.73	17.40	9.84	17.37	19.99	29.47	0.08
1300.00	1.44	29.18	1299.70	19.66	11.32	19.62	22.69	29.93	0.30
1400.00	1.21	21.55	1399.67	21.75	12.32	21.70	24.99	29.53	0.29
1500.00	1.04	29.39	1499.65	23.52	13.15	23.47	26.95	29.22	0.23
1600.00	0.86	37.22	1599.64	24.90	14.05	24.85	28.59	29.43	0.22
1700.00	0.88	45.86	1699.63	26.04	15.06	25.98	30.08	30.04	0.13
1800.00	0.90	54.50	1799.61	27.03	16.25	26.97	31.54	31.01	0.14

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	TVD FT	+N/-S FT	+E/-W FT	Vertical Section FT	Closure Distance FT	Closure Direction Deg	Dogleg Severity Deg/100
1900.00	1.07	61.11	1899.60	27.94	17.71	27.87	33.08	32.37	0.20
2000.00	1.23	67.73	1999.58	28.80	19.52	28.72	34.79	34.13	0.21
2100.00	1.22	68.69	2099.56	29.59	21.51	29.51	36.58	36.01	0.02
2200.00	1.21	69.66	2199.53	30.34	23.49	30.25	38.37	37.74	0.02
2300.00	1.64	74.42	2299.50	31.09	25.85	30.99	40.44	39.74	0.44
2400.00	2.06	79.19	2399.45	31.81	28.99	31.70	43.04	42.34	0.45
2500.00	1.69	84.16	2499.40	32.30	32.23	32.18	45.63	44.94	0.40
2600.00	1.32	79.12	2599.36	32.67	34.83	32.54	47.75	46.83	0.39
2700.00	1.13	83.13	2699.34	33.01	36.94	32.86	49.54	48.22	0.21
2800.00	0.95	87.14	2799.32	33.17	38.75	33.02	51.01	49.44	0.20
2900.00	1.37	98.35	2899.30	33.03	40.76	32.88	52.46	50.98	0.48
3000.00	1.79	59.57	2999.27	33.65	43.29	33.49	54.83	52.14	1.12
3100.00	1.89	64.75	3099.22	35.15	46.13	34.97	57.99	52.69	0.19
3200.00	1.98	69.93	3199.16	36.44	49.24	36.25	61.26	53.49	0.20
3300.00	2.14	73.50	3299.09	37.57	52.65	37.36	64.68	54.49	0.21
3400.00	2.31	77.07	3399.02	38.55	56.41	38.33	68.32	55.65	0.22
3500.00	1.77	81.72	3498.96	39.22	59.90	38.99	71.60	56.78	0.56
3600.00	1.23	86.37	3598.92	39.51	62.49	39.27	73.93	57.70	0.55
3700.00	2.08	105.69	3698.88	39.09	65.31	38.84	76.11	59.10	1.01
3800.00	2.93	115.01	3798.78	37.51	69.37	37.25	78.87	61.60	0.94
3900.00	3.38	129.50	3898.63	34.56	73.97	34.27	81.64	64.96	0.91
4000.00	3.83	137.98	3998.44	30.20	78.48	29.90	84.09	68.95	0.69
4100.00	4.52	132.46	4098.17	25.06	83.62	24.74	87.29	73.31	0.80
4200.00	5.21	136.94	4197.81	19.08	89.63	18.74	91.63	77.98	0.79
4300.00	4.05	128.29	4297.48	13.58	95.50	13.21	96.46	81.91	1.36
4400.00	2.88	119.65	4397.30	10.15	100.45	9.76	100.96	84.23	1.28
4500.00	2.77	123.72	4497.18	7.57	104.64	7.16	104.91	85.86	0.23
4600.00	2.66	127.79	4597.06	4.80	108.49	4.38	108.59	87.47	0.22
4700.00	2.57	131.73	4696.96	1.88	112.00	1.45	112.02	89.04	0.20
4800.00	2.48	135.67	4796.86	-1.16	115.18	-1.60	115.19	90.58	0.20
4900.00	2.16	133.40	4896.78	-4.00	118.06	-4.45	118.13	91.94	0.34
5000.00	1.83	131.13	4996.72	-6.34	120.63	-6.80	120.80	93.01	0.33
5100.00	1.84	129.01	5096.67	-8.40	123.08	-8.88	123.37	93.91	0.07
5200.00	1.85	126.88	5196.62	-10.39	125.63	-10.87	126.06	94.73	0.07
5300.00	1.71	133.34	5296.57	-12.38	128.01	-12.87	128.61	95.53	0.25
5400.00	1.57	139.80	5396.53	-14.46	129.98	-14.95	130.78	96.35	0.23
5500.00	1.50	134.90	5496.49	-16.42	131.79	-16.93	132.81	97.10	0.15
5600.00	1.42	130.00	5596.46	-18.14	133.66	-18.66	134.89	97.73	0.15
5700.00	1.43	132.27	5696.43	-19.78	135.54	-20.30	136.97	98.30	0.06



Weatherford®

Evaluation, Drilling & Intervention
10000 West County Rd. 116
P.O. Box 61028
Midland, TX USA 79711
Tel. (432) 561-8892 Fax (432) 561-8895

Devon Energy
333 W. Sherridan Ave
Oklahoma City, OK, 73102

Date: October 12, 2012

Attention: John Logemann

Re: Devon Energy
Well: Cotton Draw Unit #159H
Eddy County, New Mexico

Enclosed, please find the original survey performed on the referenced well by Precision Energy Services, Inc. (P-5 No. 676004), a Weatherford company. Other information required by your office is as follows:

<u>Name & Title Of Surveyor</u>	<u>Well Number</u>	<u>Surveyed Depths</u>	<u>Dates Performed</u>	<u>Type of Survey</u>
John Self	159H	7620' MD	9/29/2012	Measurement
MWD Supervisor		12731' MD	10/11/2012	While Drilling


A notarized plan vs. actual is attached to the survey report. If any other information is required, please contact the undersigned at the letterhead address and phone number.

Jesse Aguilar
Area Manager

On this, the 11th day of October, 2012, before me a notary public, the undersigned officer, personally appeared Jesse Aguilar, known to me (or satisfactorily proven) to be the person whose name is subscribed to the within instrument, and acknowledged that he executed the same for the purposes therein contained.

In witness hereof, I hereunto set my hand and official seal.

Notary Public

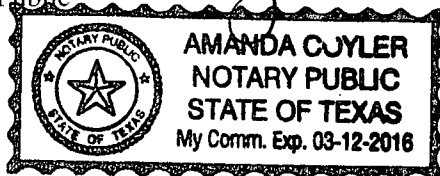



Weatherford

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy Date: 10/11/2012 Time: 09:21:34 Page: 1
Field: Eddy Co., NM (NAD 83) Co-ordinate(NE) Reference: Well: CDU #159H, Grid North
Site: Cotton Draw Unit #159H Vertical (TVD) Reference: SITE 3390.0
Well: CDU #159H Section (VS) Reference: Well (0.00N, 0.00E, 359.78Azi)
Wellpath: 1 Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: Wft Svy Start Date: 10/5/2012
Company: Weatherford Engineer: Russell W. Joyner
Tool: MWD;MWD - Standard Tied-to: User Defined

Field: Eddy Co., NM (NAD 83)

Map System: US State Plane Coordinate System 1983 Map Zone: New Mexico, Eastern Zone
Geo Datum: GRS 1980 Coordinate System: Well Centre
Sys Datum: Mean Sea Level Geomagnetic Model: IGRF2010

Site: Cotton Draw Unit #159H

Site Position: Northing: 409360.00 ft Latitude: 32 7 26.428 N
From: Map Easting: 725634.11 ft Longitude: 103 44 16.843 W
Position Uncertainty: 0.00 ft North Reference: Grid
Ground Level: 3364.00 ft Grid Convergence: 0.32 deg

Well: CDU #159H Slot Name:
Well Position: +N/-S 0.00 ft Northing: 409360.00 ft Latitude: 32 7 26.428 N
+E/-W 0.00 ft Easting: 725634.11 ft Longitude: 103 44 16.843 W
Position Uncertainty: 0.00 ft

Wellpath: 1 Drilled From: Surface
Current Datum: SITE Height 3390.00 ft Tie-on Depth: 0.00 ft
Magnetic Data: 9/29/2012 Above System Datum: Mean Sea Level
Field Strength: 48434 nT Declination: 7.50 deg
Vertical Section: Depth From (TVD) +N/-S Mag Dip Angle: 60.03 deg
ft ft +E/-W Direction
deg
0.00 0.00 0.00 359.78

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
7600.00	0.99	178.02	7596.05	-50.28	155.51	0.00	-50.88	409309.72	725789.62	Tie On VES
7620.00	0.81	5.69	7616.05	-50.31	155.53	8.97	-50.91	409309.69	725789.64	First Wft Svy
7670.00	5.29	2.11	7665.97	-47.66	155.65	8.97	-48.25	409312.34	725789.76	
7702.00	9.58	0.97	7697.69	-43.52	155.75	13.41	-44.12	409316.48	725789.86	
7733.00	13.50	359.93	7728.06	-37.32	155.79	12.66	-37.92	409322.68	725789.90	
7764.00	16.61	358.53	7757.99	-29.27	155.67	10.10	-29.87	409330.73	725789.78	
7796.00	18.71	356.94	7788.48	-19.57	155.28	6.73	-20.17	409340.43	725789.39	
7827.00	21.24	357.14	7817.62	-9.00	154.73	8.16	-9.59	409351.00	725788.84	
7858.00	23.52	0.04	7846.28	2.80	154.46	8.17	2.21	409362.80	725788.57	
7890.00	25.11	1.07	7875.44	15.97	154.59	5.14	15.38	409375.97	725788.70	
7921.00	27.33	1.36	7903.25	29.67	154.88	7.17	29.07	409389.67	725788.99	
7952.00	28.81	1.98	7930.60	44.25	155.31	4.87	43.65	409404.25	725789.42	
7983.00	29.85	2.05	7957.63	59.42	155.84	3.36	58.82	409419.42	725789.95	
8015.00	32.04	1.64	7985.07	75.87	156.37	6.88	75.27	409435.87	725790.48	
8046.00	34.96	0.74	8010.92	92.97	156.72	9.55	92.37	409452.97	725790.83	
8077.00	39.08	0.11	8035.67	111.63	156.85	13.35	111.03	409471.63	725790.96	
8108.00	41.36	359.11	8059.33	131.65	156.71	7.64	131.05	409491.65	725790.82	
8140.00	42.95	358.59	8083.06	153.12	156.28	5.09	152.52	409513.12	725790.39	
8171.00	45.80	357.55	8105.21	174.78	155.55	9.49	174.19	409534.78	725789.66	
8202.00	47.70	356.14	8126.45	197.33	154.30	6.97	196.73	409557.33	725788.41	
8233.00	50.96	354.45	8146.65	220.75	152.36	11.30	220.17	409580.75	725786.47	
8265.00	54.96	354.95	8165.93	246.18	150.01	12.56	245.61	409606.18	725784.12	
8296.00	57.66	356.07	8183.12	271.89	147.99	9.21	271.32	409631.89	725782.10	
8327.00	60.11	358.68	8199.14	298.40	146.78	10.70	297.84	409658.40	725780.89	



Weatherford

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy
Field: Eddy Co., NM (NAD 83)
Site: Cotton Draw Unit #159H
Well: CDU #159H
Wellpath: 1

Date: 10/11/2012 Time: 09:21:34 Page: 2
Co-ordinate(NE) Reference: Well: CDU #159H, Grid North
Vertical (TVD) Reference: SITE 3390.0
Section (VS) Reference: Well (0.00N,0.00E,359.78Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
8358.00	63.99	0.63	8213.67	325.78	146.63	13.69	325.21	409685.78	725780.74	
8389.00	66.69	0.39	8226.60	353.95	146.88	8.74	353.38	409713.95	725780.99	
8421.00	69.33	359.27	8238.58	383.62	146.79	8.87	383.05	409743.62	725780.90	
8443.00	71.35	358.31	8245.98	404.33	146.35	10.06	403.76	409764.33	725780.46	
8475.00	74.07	358.31	8255.49	434.87	145.45	8.50	434.30	409794.87	725779.56	
8506.00	74.44	358.51	8263.91	464.69	144.62	1.35	464.13	409824.69	725778.73	
8537.00	75.88	358.44	8271.85	494.65	143.82	4.65	494.09	409854.65	725777.93	
8569.00	77.53	358.01	8279.20	525.77	142.86	5.32	525.22	409885.77	725776.97	
8600.00	78.66	357.89	8285.60	556.08	141.77	3.66	555.54	409916.08	725775.88	
8631.00	80.59	357.15	8291.18	586.55	140.45	6.65	586.00	409946.55	725774.56	
8662.00	82.64	357.07	8295.70	617.18	138.90	6.62	616.64	409977.18	725773.01	
8693.00	85.24	357.36	8298.97	647.96	137.41	8.44	647.43	410007.96	725771.52	
8724.00	87.62	357.61	8300.90	678.87	136.05	7.72	678.34	410038.87	725770.16	
8756.00	89.79	356.97	8301.63	710.83	134.54	7.07	710.30	410070.83	725768.65	
8849.00	90.07	356.34	8301.74	803.67	129.11	0.74	803.16	410163.67	725763.22	
8943.00	90.00	357.54	8301.68	897.53	124.09	1.28	897.05	410257.53	725758.20	
9036.00	91.33	357.90	8300.60	990.45	120.39	1.48	989.98	410350.45	725754.50	
9130.00	90.70	357.92	8298.94	1084.37	116.97	0.67	1083.91	410444.37	725751.08	
9224.00	89.93	358.32	8298.42	1178.32	113.88	0.92	1177.87	410538.32	725747.99	
9318.00	90.63	357.63	8297.96	1272.26	110.56	1.05	1271.82	410632.26	725744.67	
9412.00	89.58	357.52	8297.79	1366.17	106.58	1.12	1365.75	410726.17	725740.69	
9505.00	90.07	356.74	8298.08	1459.05	101.93	0.99	1458.65	410819.05	725736.04	
9600.00	89.51	356.57	8298.42	1553.89	96.38	0.62	1553.51	410913.89	725730.49	
9693.00	91.96	356.96	8297.23	1646.73	91.14	2.67	1646.36	411006.73	725725.25	
9787.00	91.40	357.10	8294.47	1740.56	86.27	0.61	1740.22	411100.56	725720.38	
9881.00	90.91	356.99	8292.58	1834.42	81.42	0.53	1834.09	411194.42	725715.53	
9975.00	89.72	357.10	8292.06	1928.29	76.58	1.27	1927.98	411288.29	725710.69	
10069.00	90.00	356.28	8292.29	2022.13	71.15	0.92	2021.84	411382.13	725705.26	
10162.00	90.42	356.89	8291.95	2114.96	65.61	0.80	2114.70	411474.96	725699.72	
10256.00	91.47	357.32	8290.40	2208.83	60.86	1.21	2208.58	411568.83	725694.97	
10350.00	91.75	357.92	8287.76	2302.71	56.96	0.70	2302.47	411662.71	725691.07	
10443.00	90.00	358.61	8286.34	2395.65	54.15	2.02	2395.43	411755.65	725688.26	
10537.00	90.00	359.75	8286.34	2489.64	52.80	1.21	2489.42	411849.64	725686.91	
10631.00	92.31	359.54	8284.45	2583.61	52.22	2.47	2583.39	411943.61	725686.33	
10725.00	91.54	359.28	8281.29	2677.56	51.25	0.86	2677.34	412037.56	725685.36	
10818.00	89.16	358.57	8280.72	2770.53	49.51	2.67	2770.32	412130.53	725683.62	
10912.00	90.28	358.36	8281.18	2864.49	46.99	1.21	2864.29	412224.49	725681.10	
11006.00	92.38	358.43	8279.00	2958.43	44.36	2.24	2958.23	412318.43	725678.47	
11099.00	91.05	358.21	8276.21	3051.34	41.63	1.45	3051.16	412411.34	725675.74	
11193.00	91.47	358.37	8274.15	3145.28	38.83	0.48	3145.10	412505.28	725672.94	
11287.00	90.63	358.09	8272.43	3239.22	35.92	0.94	3239.05	412599.22	725670.03	
11381.00	89.86	357.84	8272.02	3333.15	32.59	0.86	3333.01	412693.15	725666.70	
11475.00	92.87	359.49	8269.78	3427.09	30.40	3.65	3426.95	412787.09	725664.51	
11570.00	92.31	359.76	8265.49	3521.99	29.78	0.65	3521.85	412881.99	725663.89	
11664.00	91.96	0.12	8261.99	3615.92	29.68	0.53	3615.78	412975.92	725663.79	
11759.00	91.40	359.85	8259.20	3710.88	29.65	0.65	3710.74	413070.88	725663.76	
11853.00	89.86	359.69	8258.17	3804.87	29.28	1.65	3804.73	413164.87	725663.39	
11948.00	90.07	0.13	8258.23	3899.87	29.13	0.51	3899.73	413259.87	725663.24	
12043.00	89.65	0.44	8258.46	3994.87	29.60	0.55	3994.73	413354.87	725663.71	
12138.00	89.58	359.87	8259.10	4089.87	29.86	0.60	4089.72	413449.87	725663.97	
12233.00	89.65	359.99	8259.74	4184.87	29.74	0.15	4184.72	413544.87	725663.85	
12327.00	90.63	359.23	8259.51	4278.86	29.10	1.32	4278.72	413638.86	725663.21	



Weatherford

WFT Survey Report X & Y's

**Weatherford**

Company: Devon Energy	Date: 10/11/2012	Time: 09:21:34	Page: 3
Field: Eddy Co., NM (NAD 83)	Co-ordinate(NE) Reference: Well: CDU #159H, Grid North		
Site: Cotton Draw Unit #159H	Vertical (TVD) Reference: SITE 3390.0		
Well: CDU #159H	Section (VS) Reference: Well (0.00N,0.00E,359.78Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
12421.00	90.84	358.73	8258.30	4372.84	27.43	0.58	4372.70	413732.84	725661.54	
12516.00	90.77	358.60	8256.97	4467.80	25.21	0.16	4467.67	413827.80	725659.32	
12610.00	90.42	358.77	8255.99	4561.77	23.06	0.41	4561.65	413921.77	725657.17	
12704.00	90.63	359.25	8255.13	4655.75	21.43	0.56	4655.64	414015.75	725655.54	
12731.00	90.77	359.57	8254.80	4682.75	21.15	1.29	4682.64	414042.75	725655.26	Last Wft Svy
12783.00	90.77	359.57	8254.10	4734.74	20.76	0.00	4734.63	414094.74	725654.87	Proj. To Bit

Annotation

MD ft	TVD ft	
7600.00	7596.05	Tie On VES
7620.00	7616.05	First Wft Svy
12731.00	8254.80	Last Wft Svy
12783.00	8254.10	Proj. To Bit



Cotton Draw Unit #159H
Eddy Co., New Mexico

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	7600.00	0.99	178.02	7596.05	-50.28	155.51	0.00	0.00	-50.88	
2	7639.00	1.00	174.19	7635.05	-50.96	155.56	0.17	278.46	-51.55	
3	7650.00	2.00	357.92	7646.05	-50.86	155.56	27.27	-177.51	-51.46	
4	7655.00	2.00	357.92	7651.04	-50.69	155.55	0.00	0.00	-51.28	
5	8671.85	90.00	357.92	8290.00	610.53	131.58	8.65	0.00	610.02	
6	12799.71	90.00	357.92	8290.00	4735.68	-18.00	0.00	0.00	4735.71	Pbhl

WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
CDU #159H	0.00	0.00	409360.00	725634.11	32°07'26.428N	103°44'16.843W	N/A

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
Pbhl	8290.00	4735.68	-18.00	414095.68	725616.11	32°08'13.292N	103°44'16.748W	Point

Survey: Wft Svy (CDU #159H/1)

No	MD	Inc	Az	TVD	+N/-S	+E/-W	DLeg	TFace	VSec
81	12783.00	90.77	359.57	8254.10	4734.74	20.76	0.00	180.00	4734.63

FIELD DETAILS

Eddy Co., NM (NAD 83)

Geodetic System: US State Plane Coordinate System 1983
Ellipsoid: GRS 1980
Zone: New Mexico, Eastern Zone
Magnetic Model: IGRF2010


System Datum: Mean Sea Level
Local North: Grid North

SITE DETAILS

Cotton Draw Unit #159H

Site Centre Northing: 409360.00
Easting: 725634.11

Ground Level: 3364.00
Positional Uncertainty: 0.00
Convergence: 0.32



Azimuths to Grid North
True North: -0.32°
Magnetic North: 7.18°



Magnetic Field
Strength: 48434nT
Dip Angle: 60.03°
Total Correction to Grid: 9.29/2012
Model: IGRF2010

LEGEND


- CDU #159H, 1, Gyro
- CDU #159H, 1, Plan #3
- 1 Wft Svy



Weatherford

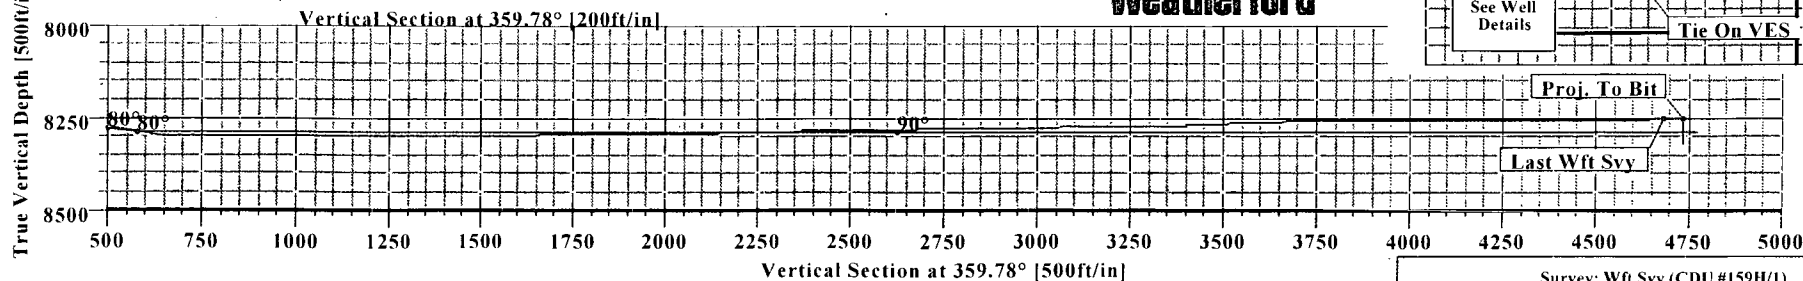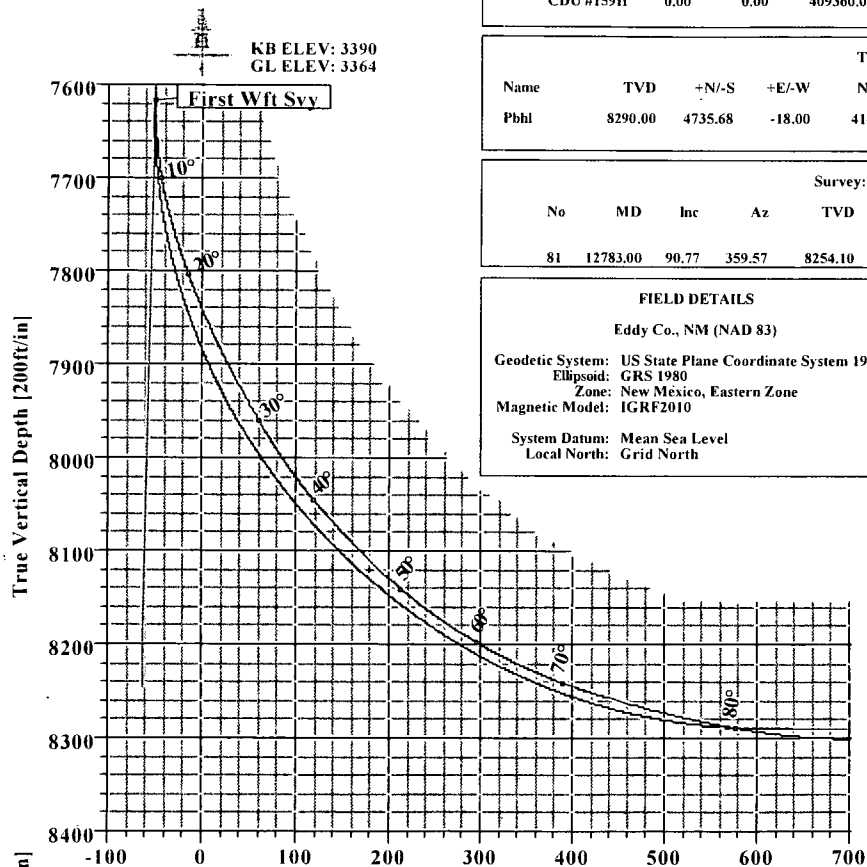

West(-)/East(+) [1000ft/in]

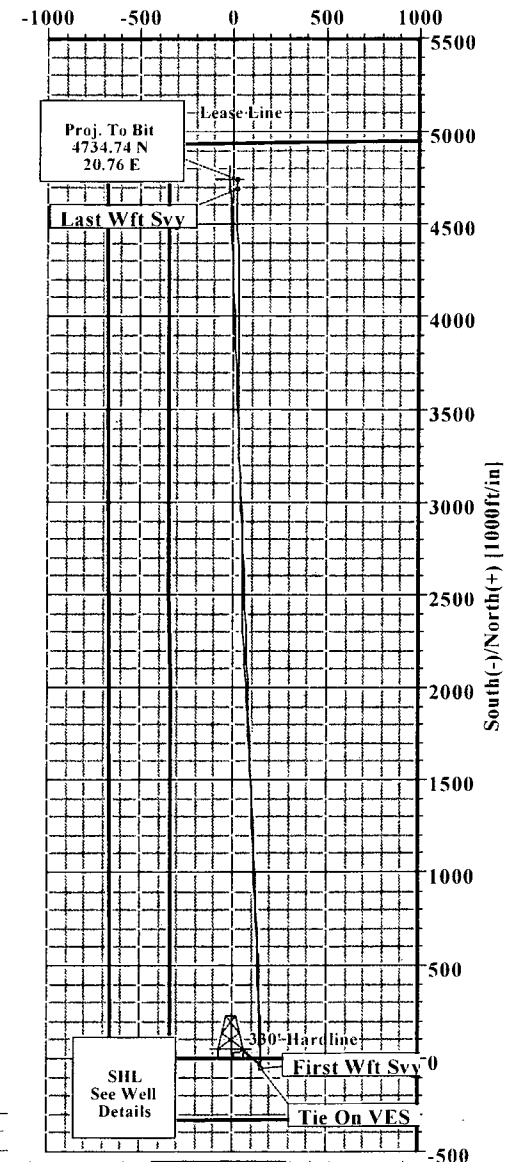

Survey: Wft Svy (CDU #159H/1)

Created By: Russell W. Joyner

Date: 10/11/2012