

COG Operating, LLC

Eddy County(NM27E)

Sec.19-T17S-R30E

Burch Keely Unit #651

15-40278

Wellbore #1

Survey: Survey #2-Archer MWD

Standard Survey Report

12 July, 2013

Archer



COG Operating, LLC
Project: Eddy County(NM27E)
Site: Sec.19-T17S-R30E
Well: Burch Keely Unit #651
Wellbore: Wellbore #1
Design: Design #3
Latitude: 32° 49' 23.215 N
Longitude: 104° 0' 58.143 W
Ground Level: 3624.00
WELL @ 3641.00usft

Archer

PROJECT DETAILS: Eddy County(NM27E)

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

REFERENCE INFORMATION

Co-ordinate (N/E) Reference: Well Burch Keely Unit #651, Grid North
Vertical (TVD) Reference: WELL @ 3641.00usft
Section (VS) Reference: Slot - (0.00N, 0.00E)
Measured Depth Reference: WELL @ 3641.00usft
Calculation Method: Minimum Curvature

WELL DETAILS: Burch Keely Unit #651



+N/-S	+E/-W	Northing	Ground Level:	3624.00	Latitude	Longitude	Slot
0.00	0.00	663306.600	Easting	597436.600	32° 49' 23.215 N	104° 0' 58.143 W	

WELLBORE TARGET DETAILS (MAP CO-ORDINATES AND LAT/LONG)


Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
Burch Keely Unit #651 Tgt	4650.00	-185.70	58.90	663120.900	597495.500	32° 49' 21.375 N	104° 0' 57.460 W	Circle (Radius: 10.00)

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
1022.00	1.13	94.41	1021.92	-6.87	6.20	0.00	0.00	8.42	Tie-In / Start DLS 0.88° TFO -180.00
1150.00	0.00	0.00	1149.92	-6.96	7.46	0.88	-180.00	8.89	Start DLS 2.00° TFO 163.94
1337.16	3.74	163.94	1336.94	-12.84	9.15	2.00	163.94	15.00	Start 2661.71' hold at 1337.16 MD
3998.87	3.74	163.94	3992.97	-179.83	57.21	0.00	0.00	188.71	Start Drop -2.00°
4186.03	0.00	0.01	4180.00	-185.70	58.90	2.00	180.00	194.82	Start 470.00' hold at 4186.03 MD
4656.03	0.00	0.01	4650.00	-185.70	58.90	0.00	0.01	194.82	TD at 4656.03

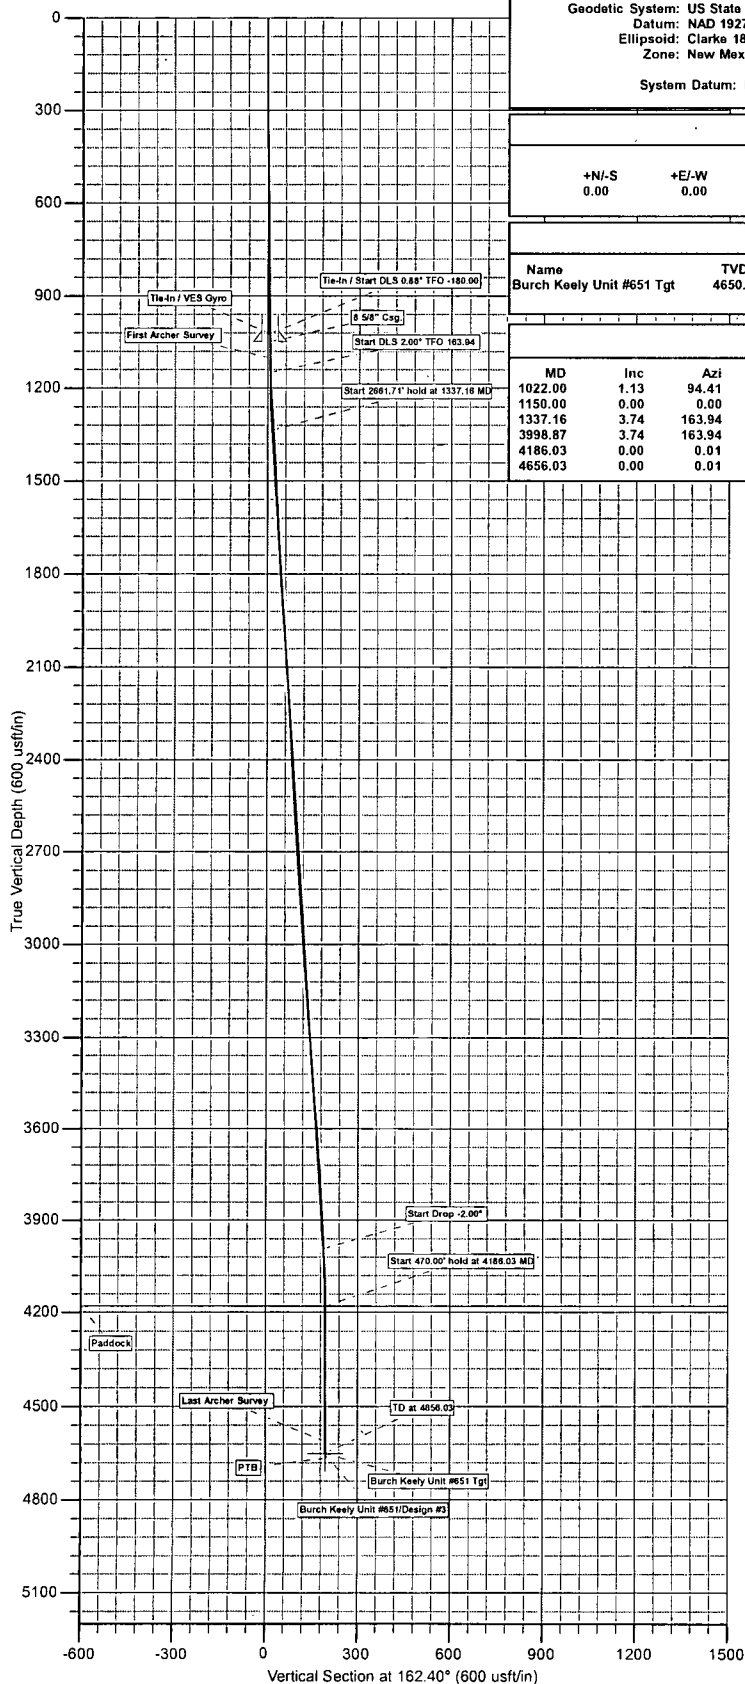

Azimuths to Grid North
True North: -0.17°
Magnetic North: 7.41°
Magnetic Field
Strength: 48722.5nT
Dip Angle: 60.61°
Date: 06/28/2013
Model: IGRF2010

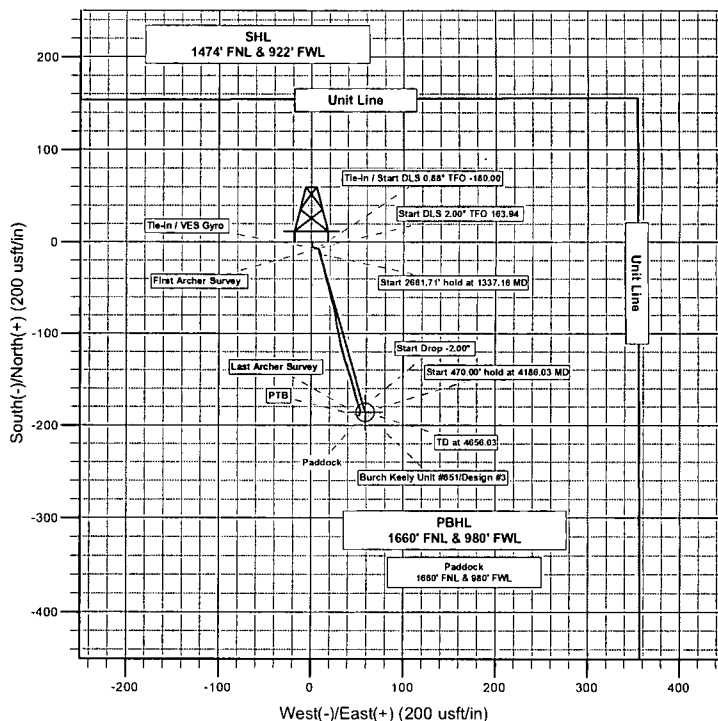

Plan: Design #3 (Burch Keely Unit #651/Wellbore #1)

Created By: Bret Wolford Date: 6:38, July 12 2013

Company:	COG Operating, LLC	Local Co-ordinate Reference:	Well Burch Keely Unit #651
Project:	Eddy County(NM27E)	TVD Reference:	WELL @ 3641.00usft
Site:	Sec.19-T17S-R30E	MD Reference:	WELL @ 3641.00usft
Well:	Burch Keely Unit #651	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	EDM 5000.1 Single-User.Db

Project:	Eddy County(NM27E)	System Datum:	Mean Sea Level
Map System:	US State Plane 1927 (Exact solution)		
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Sec.19-T17S-R30E				
Site Position:		Northing:	662,445.100 usft	Latitude:	32° 49' 14.575 N
From:	Map	Easting:	601,220.700 usft	Longitude:	104° 0' 13.830 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16"	Grid Convergence:	0.18 °

Well	Burch Keely Unit #651					
Well Position	+N/-S	0.00 usft	Northing:	663,306.600 usft	Latitude:	32° 49' 23.215 N
	+E/-W	0.00 usft	Easting:	597,436.600 usft	Longitude:	104° 0' 58.143 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,624.00 usft

Wellbore:	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2010	06/28/13	7.59	60.61	48,722

Design:	Wellbore #1				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction	
	(usft)	(usft)	(usft)	(°)	
	0.00	0.00	0.00	162.40	

Survey Program	Date	07/12/13			
From	To	Survey (Wellbore)	Tool Name	Description	
(usft)	(usft)				
100.00	1,022.00	Survey #1-VES Gyro (Wellbore #1)	GYD_DP_MS	Gyrodatta gyro-compassing and drop	
1,022.00	4,672.00	Survey #2-Archer MWD (Wellbore #1)	MWD	MWD - Standard	

Survey										
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Vertical Section	Dogleg Rate	Build Rate	Turn Rate	
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	
Tie-In / VES Gyro										
1,022.00	1.13	94.41	1,021.92	-6.87	6.20	8.42	0.00	0.00	0.00	
First Archer Survey										
1,103.00	0.90	102.00	1,102.91	-7.06	7.62	9.03	0.33	-0.28	9.37	
1,165.00	1.90	155.30	1,164.89	-8.09	8.53	10.29	2.49	1.61	85.97	
1,259.00	4.40	171.90	1,258.75	-13.08	9.69	15.40	2.80	2.66	17.66	
1,352.00	4.30	162.20	1,351.48	-19.93	11.25	22.40	0.80	-0.11	-10.43	
1,446.00	1.90	161.70	1,445.34	-24.77	12.82	27.49	2.55	-2.55	-0.53	
1,540.00	3.10	170.30	1,539.25	-28.75	13.74	31.56	1.33	1.28	9.15	
1,634.00	2.30	166.80	1,633.14	-33.10	14.60	35.96	0.87	-0.85	-3.72	
1,728.00	3.30	170.40	1,727.03	-37.60	15.48	40.52	1.08	1.06	3.83	
1,822.00	3.50	162.40	1,820.86	-43.00	16.80	46.07	0.55	0.21	-8.51	

Company:	COG Operating, LLC	Local Co-ordinate Reference:	Well Burch Keely Unit #651
Project:	Eddy County(NM27E)	TVD Reference:	WELL @ 3641.00usft
Site:	Sec.19-T17S-R30E	MD Reference:	WELL @ 3641.00usft
Well:	Burch Keely Unit #651	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	EDM 5000.1 Single User Db

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,915.00	4.00	165.70	1,913.66	-48.85	18.46	52.15	0.59	0.54	3.55
2,009.00	3.90	167.40	2,007.44	-55.15	19.96	58.60	0.16	-0.11	1.81
2,103.00	3.50	167.30	2,101.24	-61.07	21.29	64.65	0.43	-0.43	-0.11
2,196.00	3.40	163.30	2,194.07	-66.48	22.71	70.23	0.28	-0.11	-4.30
2,290.00	3.30	164.30	2,287.91	-71.75	24.24	75.72	0.12	-0.11	1.06
2,384.00	2.80	164.60	2,381.78	-76.57	25.58	80.72	0.53	-0.53	0.32
2,478.00	3.60	172.10	2,475.63	-81.71	26.60	85.92	0.96	0.85	7.98
2,571.00	3.50	171.20	2,568.46	-87.40	27.44	91.61	0.12	-0.11	-0.97
2,665.00	3.60	170.20	2,662.27	-93.15	28.38	97.37	0.13	0.11	-1.06
2,759.00	4.00	172.50	2,756.07	-99.31	29.31	103.52	0.46	0.43	2.45
2,853.00	4.00	166.90	2,849.84	-105.75	30.48	110.02	0.42	0.00	-5.96
2,947.00	3.60	166.60	2,943.63	-111.81	31.90	116.23	0.43	-0.43	-0.32
3,040.00	4.40	165.70	3,036.41	-118.11	33.46	122.70	0.86	0.86	-0.97
3,134.00	4.40	163.90	3,130.13	-125.07	35.35	129.91	0.15	0.00	-1.91
3,228.00	4.30	160.90	3,223.86	-131.86	37.51	137.03	0.26	-0.11	-3.19
3,322.00	4.30	162.50	3,317.59	-138.55	39.72	144.08	0.13	0.00	1.70
3,416.00	4.50	163.20	3,411.32	-145.45	41.84	151.29	0.22	0.21	0.74
3,510.00	4.40	161.70	3,505.03	-152.40	44.04	158.58	0.16	-0.11	-1.60
3,604.00	4.40	165.20	3,598.76	-159.31	46.10	165.79	0.29	0.00	3.72
3,698.00	4.40	165.20	3,692.48	-166.28	47.94	172.99	0.00	0.00	0.00
3,792.00	3.40	163.50	3,786.26	-172.44	49.65	179.38	1.07	-1.06	-1.81
3,886.00	3.10	155.50	3,880.11	-177.43	51.50	184.69	0.58	-0.32	-8.51
3,980.00	2.10	166.60	3,974.01	-181.41	52.95	188.93	1.19	-1.06	11.81
4,073.00	1.60	166.80	4,066.96	-184.34	53.64	191.93	0.54	-0.54	0.22
4,167.00	0.30	213.80	4,160.95	-185.82	53.80	193.39	1.50	-1.38	50.00
4,261.00	0.10	173.30	4,254.95	-186.10	53.68	193.62	0.25	-0.21	-43.09
4,354.00	0.40	183.20	4,347.95	-186.51	53.67	194.01	0.32	0.32	10.65
4,448.00	0.50	215.60	4,441.94	-187.17	53.41	194.56	0.29	0.11	34.47
4,542.00	0.70	216.10	4,535.94	-187.97	52.83	195.14	0.21	0.21	0.53
Last Archer Survey:									
4,618.00	0.70	195.70	4,611.93	-188.79	52.43	195.81	0.33	0.00	-26.84
PTB									
4,672.00	0.70	195.70	4,665.93	-189.42	52.26	196.36	0.00	0.00	0.00

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Comment
1,022.00	1,021.92	-6.87	6.20	Tie-In / VES GYRO
1,103.00	1,102.91	-7.06	7.62	First Archer Survey
4,618.00	4,611.93	-188.79	52.43	Last Archer Survey
4,672.00	4,665.93	-189.42	52.26	PTB

Checked By: _____ Approved By: _____ Date: _____



COG Operating, LLC

Eddy County(NM27E)

Sec.19-T17S-R30E

Burch Keely Unit #651

Wellbore #1

Survey: Survey #2-Archer MWD

Survey Report - Geographic

15 July, 2013

Archer

Company:	COG Operating, LLC	Local Co-ordinate Reference:	Well Burch Keely Unit #651
Project:	Eddy County(NM27E)	TVD Reference:	WELL @ 3641.00usft
Site:	Sec.19-T17S-R30E	MD Reference:	WELL @ 3641.00usft
Well:	Burch Keely Unit #651	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	EDM 5000.1 Single-User Db

Project:	Eddy County(NM27E)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Sec.19-T17S-R30E		
Site Position:		Northing:	662,445.100 usft
From:	Map	Easting:	601,220.700 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16"
		Latitude:	32° 49' 14.575 N
		Longitude:	104° 0' 13.830 W
		Grid Convergence:	0.18 °

Well	Burch Keely Unit #651					
Well Position	+N-S	0.00 usft	Northing:	663,306.600 usft	Latitude:	32° 49' 23.215 N
	+E-W	0.00 usft	Easting:	597,436.600 usft	Longitude:	104° 0' 58.143 W
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,624.00 usft	

Wellbore:	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	06/28/13	7.59	60.61	48,722

Design:	Wellbore #1			
Audit Notes:				
Version:	1.0	Phase:	ACTUAL	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	162.40

Survey Program:		Date:	07/12/13		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
100.00	1,022.00	Survey #1-VES Gyro (Wellbore #1)	GYD_DP_MS	Gyrodata gyro-compassing and drop	
1,022.00	4,672.00	Survey #2-Archer MWD (Wellbore #1)	MWD	MWD - Standard	

Company:	COG Operating, LLC	Local Co-ordinate Reference:	Well Burch Keely Unit #651
Project:	Eddy County (NM27E)	TVD Reference:	WELL @ 3641.00usft
Site:	Sec.19-T17S-R30E	MD Reference:	WELL @ 3641.00usft
Well:	Burch Keely Unit #651	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	EDM 5000.1 Single User Db

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
Tie-In / VES Gyro									
1,022.00	1.13	94.41	1,021.92	-6.87	6.20	663,299.734	597,442.802	32° 49' 23.147 N	104° 0' 58.071 W
First Archer Survey									
1,103.00	0.90	102.00	1,102.91	-7.06	7.62	663,299.540	597,444.220	32° 49' 23.145 N	104° 0' 58.054 W
1,165.00	1.90	155.30	1,164.89	-8.09	8.53	663,298.505	597,445.126	32° 49' 23.134 N	104° 0' 58.044 W
1,259.00	4.40	171.90	1,258.75	-13.08	9.69	663,293.519	597,446.286	32° 49' 23.085 N	104° 0' 58.030 W
1,352.00	4.30	162.20	1,351.48	-19.93	11.25	663,286.667	597,447.854	32° 49' 23.017 N	104° 0' 58.012 W
1,446.00	1.90	161.70	1,445.34	-24.77	12.82	663,281.832	597,449.421	32° 49' 22.969 N	104° 0' 57.994 W
1,540.00	3.10	170.30	1,539.25	-28.75	13.74	663,277.847	597,450.338	32° 49' 22.930 N	104° 0' 57.983 W
1,634.00	2.30	166.80	1,633.14	-33.10	14.60	663,273.505	597,451.197	32° 49' 22.887 N	104° 0' 57.973 W
1,728.00	3.30	170.40	1,727.03	-37.60	15.48	663,269.001	597,452.079	32° 49' 22.842 N	104° 0' 57.963 W
1,822.00	3.50	162.40	1,820.86	-43.00	16.80	663,263.598	597,453.398	32° 49' 22.789 N	104° 0' 57.948 W
1,915.00	4.00	165.70	1,913.66	-48.85	18.46	663,257.749	597,455.058	32° 49' 22.731 N	104° 0' 57.929 W
2,009.00	3.90	167.40	2,007.44	-55.15	19.96	663,251.452	597,456.565	32° 49' 22.668 N	104° 0' 57.911 W
2,103.00	3.50	167.30	2,101.24	-61.07	21.29	663,245.534	597,457.893	32° 49' 22.610 N	104° 0' 57.896 W
2,196.00	3.40	163.30	2,194.07	-66.48	22.71	663,240.123	597,459.309	32° 49' 22.556 N	104° 0' 57.879 W
2,290.00	3.30	164.30	2,287.91	-71.75	24.24	663,234.848	597,460.843	32° 49' 22.504 N	104° 0' 57.862 W
2,384.00	2.80	164.60	2,381.78	-76.57	25.58	663,230.030	597,462.184	32° 49' 22.456 N	104° 0' 57.846 W
2,478.00	3.60	172.10	2,475.63	-81.71	26.60	663,224.894	597,463.200	32° 49' 22.405 N	104° 0' 57.834 W
2,571.00	3.50	171.20	2,568.46	-87.40	27.44	663,219.196	597,464.035	32° 49' 22.349 N	104° 0' 57.825 W
2,665.00	3.60	170.20	2,662.27	-93.15	28.38	663,213.453	597,464.977	32° 49' 22.292 N	104° 0' 57.814 W
2,759.00	4.00	172.50	2,756.07	-99.31	29.31	663,207.294	597,465.907	32° 49' 22.231 N	104° 0' 57.803 W
2,853.00	4.00	166.90	2,849.84	-105.75	30.48	663,200.850	597,467.078	32° 49' 22.167 N	104° 0' 57.790 W
2,947.00	3.60	166.60	2,943.63	-111.81	31.90	663,194.786	597,468.505	32° 49' 22.107 N	104° 0' 57.773 W
3,040.00	4.40	165.70	3,036.41	-118.11	33.46	663,188.489	597,470.063	32° 49' 22.045 N	104° 0' 57.755 W
3,134.00	4.40	163.90	3,130.13	-125.07	35.35	663,181.530	597,471.953	32° 49' 21.976 N	104° 0' 57.733 W
3,228.00	4.30	160.90	3,223.86	-131.86	37.51	663,174.736	597,474.106	32° 49' 21.909 N	104° 0' 57.708 W
3,322.00	4.30	162.50	3,317.59	-138.55	39.72	663,168.045	597,476.319	32° 49' 21.843 N	104° 0' 57.683 W
3,416.00	4.50	163.20	3,411.32	-145.45	41.84	663,161.154	597,478.445	32° 49' 21.774 N	104° 0' 57.658 W
3,510.00	4.40	161.70	3,505.03	-152.40	44.04	663,154.200	597,480.643	32° 49' 21.705 N	104° 0' 57.632 W
3,604.00	4.40	165.20	3,598.76	-159.31	46.10	663,147.291	597,482.696	32° 49' 21.637 N	104° 0' 57.609 W
3,698.00	4.40	165.20	3,692.48	-166.28	47.94	663,140.318	597,484.538	32° 49' 21.568 N	104° 0' 57.587 W
3,792.00	3.40	163.50	3,786.26	-172.44	49.65	663,134.160	597,486.251	32° 49' 21.507 N	104° 0' 57.567 W
3,886.00	3.10	155.50	3,880.11	-177.43	51.50	663,129.174	597,488.097	32° 49' 21.458 N	104° 0' 57.546 W
3,980.00	2.10	166.60	3,974.01	-181.41	52.95	663,125.186	597,489.550	32° 49' 21.418 N	104° 0' 57.529 W
4,073.00	1.60	166.80	4,066.96	-184.34	53.64	663,122.264	597,490.241	32° 49' 21.389 N	104° 0' 57.521 W
4,167.00	0.30	213.80	4,160.95	-185.82	53.80	663,120.782	597,490.404	32° 49' 21.374 N	104° 0' 57.519 W
4,261.00	0.10	173.30	4,254.95	-186.10	53.68	663,120.496	597,490.277	32° 49' 21.372 N	104° 0' 57.521 W
4,354.00	0.40	183.20	4,347.95	-186.51	53.67	663,120.091	597,490.268	32° 49' 21.368 N	104° 0' 57.521 W
4,448.00	0.50	215.60	4,441.94	-187.17	53.41	663,119.430	597,490.011	32° 49' 21.361 N	104° 0' 57.524 W
4,542.00	0.70	216.10	4,535.94	-187.97	52.83	663,118.633	597,489.434	32° 49' 21.353 N	104° 0' 57.531 W
Last Archer Survey									
4,618.00	0.70	195.70	4,611.93	-188.79	52.43	663,117.811	597,489.035	32° 49' 21.345 N	104° 0' 57.535 W
PTB									
4,672.00	0.70	195.70	4,665.93	-189.42	52.26	663,117.175	597,488.856	32° 49' 21.339 N	104° 0' 57.538 W


Company:	COG Operating, LLC	Local Co-ordinate Reference:	Well Burch Keely Unit #651
Project:	Eddy County(NM27E)	TVD Reference:	WELL @ 3641.00usft
Site:	Sec.19-T17S-R30E	MD Reference:	WELL @ 3641.00usft
Well:	Burch Keely Unit #651	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Wellbore #1	Database:	EDM 5000.1 Single User Db

Survey Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,022.00	1,021.92	-6.87	6.20	Tie-In / VES Gyro
1,103.00	1,102.91	-7.06	7.62	First Archer Survey
4,618.00	4,611.93	-188.79	52.43	Last Archer Survey
4,672.00	4,665.93	-189.42	52.26	PTB

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------



PO Box 1370
Artesia, NM 88211-1370
(575) 748-1288



July 15, 2013

COG, LLC
One Concho Center
600 W. Illinois Ave.
Midland, TX 79701

RE: Burch Keely Unit #651
1474' FNL & 922' FWL
Sec. 19, T17S, R30E
Eddy County, New Mexico

Dear Sir,


The attached is the Deviation Survey for the above captioned well.

Very truly yours,

Chris Graham
Drilling Superintendent

State of New Mexico }
County of Eddy }

The foregoing was acknowledged before me this 15th day of July, 2013.

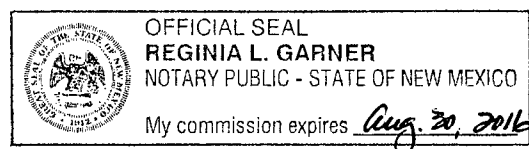

Burch Keely Unit #651

Date	Depth	Dev/Inc	Dir/AZ
7/6/2013	146	0.40	
7/6/2013	235	0.40	
7/7/2013	505	0.70	
7/7/2013	971	1.00	
7/9/2013	1103	0.90	102.00
7/9/2013	1165	1.90	155.30
7/9/2013	1259	4.40	172.90
7/9/2013	1352	4.30	162.20
7/9/2013	1446	1.90	161.70
7/9/2013	1540	3.10	170.30
7/9/2013	1634	2.30	166.80
7/9/2013	1915	4.00	169.70
7/9/2013	2009	3.90	167.40
7/9/2013	2103	3.50	167.30
7/10/2013	2478	3.60	172.10
7/10/2013	2571	3.50	171.20
7/10/2013	2665	3.60	170.20
7/10/2013	2853	4.00	166.90
7/10/2013	2947	3.60	166.60
7/10/2013	3040	4.40	165.70
7/10/2013	3322	4.30	162.50
7/10/2013	3416	4.50	163.20
7/10/2013	3510	4.40	161.70
7/11/2013	3792	3.40	163.50
7/11/2013	3886	3.10	155.50
7/11/2013	3980	2.10	166.60
7/11/2013	4073	1.60	166.80
7/11/2013	4167	0.30	213.80
7/11/2013	4261	0.10	173.30
7/11/2013	4354	0.40	183.20
7/11/2013	4542	0.70	216.20
7/11/2013	4637	0.70	195.70