

WELL DATA SHEET

Merrill #5

FIELD: <u>Atoka</u>	FORMATION: <u>San Andres/Glorietta</u>	
LOC: <u>990 FNSL , 330 FEWL</u>	BLOCK: <u>0</u>	GL: <u>3339</u>
TOWNSHIP: <u>18 S</u>	SEC: <u>34</u>	DF: <u>17</u>
SURVEY: <u>NA</u>	COUNTY: <u>Eddy</u>	KB: <u>3356</u>
	STATE: <u>New Mexico</u>	STATUS: <u>New Drill</u>
		API NO: <u>30-015-42434</u>
		REFNO: <u></u>
		Spud: <u>08/20/14</u>


TUBING DETAIL:

90jts 2-7/8" tbg
 2-7/8 x 5-1/2" TAC
 28 jts 2-7/8" tbg
 2 7/8" SN
 2 7/8" slotted tubing sub
 1 2-7/8" tbg w/ BP
 TAC @ 2938.79'
 SN @ 3853.88'
 Total: 3884.50'

ROD DETAIL:

1 1-1/4" PR w/1-1/2"x12' PRL w/PR coupling
 1 7/8" N-97 steel pony rod
 47 7/8" N-97 steel rods (new)
 93 7/8" N-97 steel rods (used)
 12 1-1/2" sinker bars w/ 3/4" pins
 2-1/2"x1-3/4"x16' RHBC HVR pump w/ 1-11/16" x 8" gas anchor
 2-5/16" spiral rod guide
 1-5/8" RH back off tool and lift sub

TOTAL: 3855.84'

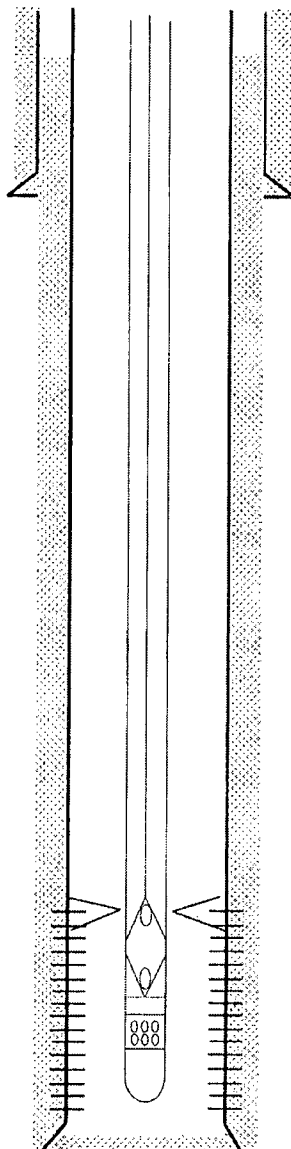

Surface CSG

8-5/8" 24#, J-55
 Set @ 922', cmt'd w/730 sxs
 Circ Yes
 12 1/4

Formation Tops

0	0
0	0
0	0
0	0

Production CSG

5-1/2" 17#, J-55
 Set @ 3985', cmt'd w/360 sxs
 No Circ.
 7 7/8
 No DV Tool Used

PERFS

Holes

San Andres/Glorietta 2698-2702	12
San Andres/Glorietta 2724-2726	6
San Andres/Glorietta 2844-2846	6
San Andres/Glorietta 2900-2902	6
San Andres/Glorietta 2936-2940	12
San Andres/Glorietta 3069-3071	6
San Andres/Glorietta 3096-3100	12
San Andres/Glorietta 3264-3268	12
San Andres/Glorietta 3304-3308	12
San Andres/Glorietta 3794-3796	6
San Andres/Glorietta 3814-3818	12
San Andres/Glorietta 3872-3876	12

PBTD 4000
 TD 4000

Andrew Taghi
 Date: 5/11/15