

RECEIVED

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87412
District IV - (505) 476-3466
1220 S. St. Francis Dr., Santa Fe, NM 87505

NOV 13 2019

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-35539
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Double Dale Fee Com
8. Well Number 1
9. OGRID Number. 16696
10. Pool name or Wildcat Malaga Atoka (Gas)
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3298

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other
2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710
4. Well Location Unit Letter <u>I</u> : <u>1600</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>East</u> line Section <u>6</u> Township <u>24S</u> Range <u>29E</u> NMPM County <u>Eddy</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3298

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-13620' PBTD-12060' Perfs-12102-12314' CIBP-12060'

13-3/8" 48# csg @ 380' w/ 400sx, 17-1/2" hole, TOC-Surf-Circ
9-5/8" 36# csg @ 2610' w/ 1125sx, 12-1/4" hole, TOC-Surf-Circ
7" 23# csg @ 10132' DVT @ 6673' w/ 1550sx, 8-3/4" hole, TOC-Surf-Circ
4-1/2" 11.6# @ 13593' DVT @ 9887' w/ 280sx, 6-1/8" hole, TOC-9885'

1. RIH & tag CIBP @ 12060', M&P 35sx cmt to 11710' - WOC & Tag
2. M&P 35sx cmt @ 10182-9837' WOC-Tag
3. Perf @ 8330', sqz 25sx cmt to 8230' WOC-Tag
4. Perf @ 6725', sqz 45sx cmt to 6505' WOC-Tag
5. Perf @ 4695', sqz 25sx cmt to 4595' WOC-Tag
6. Perf @ 2785', sqz 45sx cmt to 2560' WOC-Tag
7. Perf @ 1660', sqz 25sx cmt to 1560' WOC-Tag
8. Perf @ 430', sqz 90sx cmt to Surface

10# MLF between plugs - Above ground steel tanks will be utilized

Notify OCD 24 hrs. prior to any work done.

*** SEE ATTACHED COA'S - Revised
MUST BE PLUGGED BY 11/14/20

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 11/11/19

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Staff TITLE Staff DATE 11/14/19

Conditions of Approval (if any):

OXY USA Inc. - Proposed
Double Dale Fee Com #1
API No. 30-015-35539

90sx @ 430'-Surface

25sx @ 1660-1560' WOC-Tag

45sx @ 2785-2560' WOC-Tag

25sx @ 4695-4595' WOC-Tag

45sx @ 6725-6505' WOC-Tag

25sx @ 8330-8230' WOC-Tag

35sx @ 10182-9837' WOC-Tag


35sx @ 12060-11710'

CIBP @ 12060'

CIBP @ 12650' w/ 35' cmt to 12615'

CIBP @ 12925' w/ 15' cmt to 12910'

CIBP @ 13290' w/ 15' cmt to 13275'

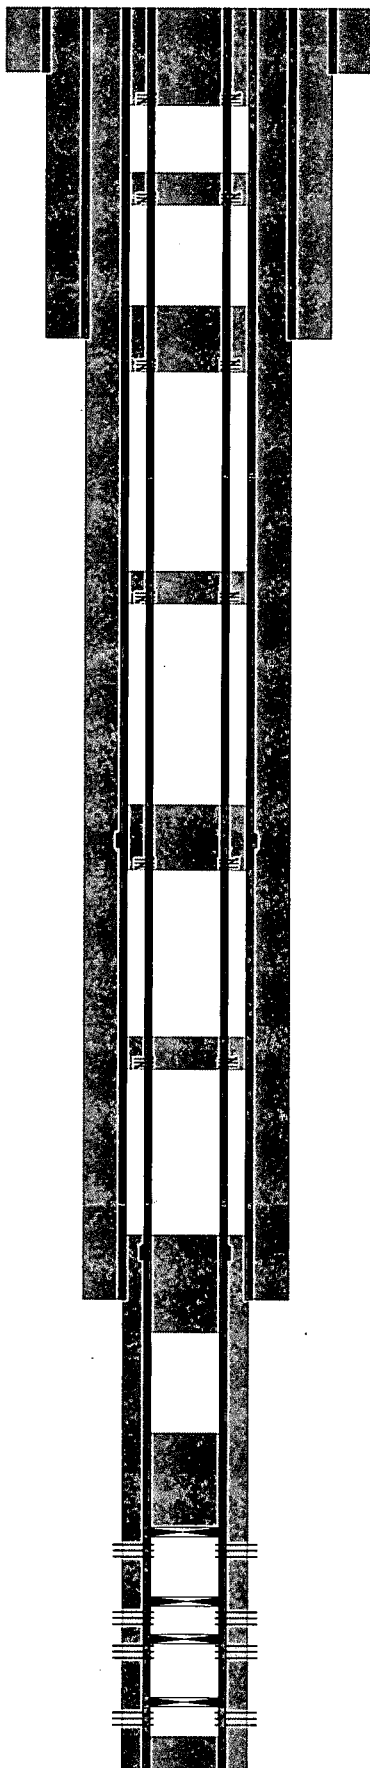

TD-13620'

Perf @ 430'

Perf @ 1660'

Perf @ 2785'

Perf @ 4695'

Perf @ 6725'

Perf @ 8330'

Perfs @ 12102-12314'

Perfs @ 12691-12827'

Perfs @ 12958-12965'

Perfs @ 13362-13377'


17-1/2" hole @ 380'
13-3/8" csg @ 380'
w/ 400sx-TOC-Surf-Circ

12-1/4" hole @ 2610'
9-5/8" csg @ 2610'
w/ 1125sx-TOC-Surf-Circ

8-3/4" hole @ 10150
7" csg @ 10132'
w/ 1550sx-TOC-Surf-Circ
DVT @ 6673'

6-1/8" hole @ 13620'
4-1/2" csg @ 13593'
w/ 280sx-TOC-9885'
DVT @ 9887'

OXY USA Inc. - Current
Double Dale Fee Com #1
API No. 30-015-35539

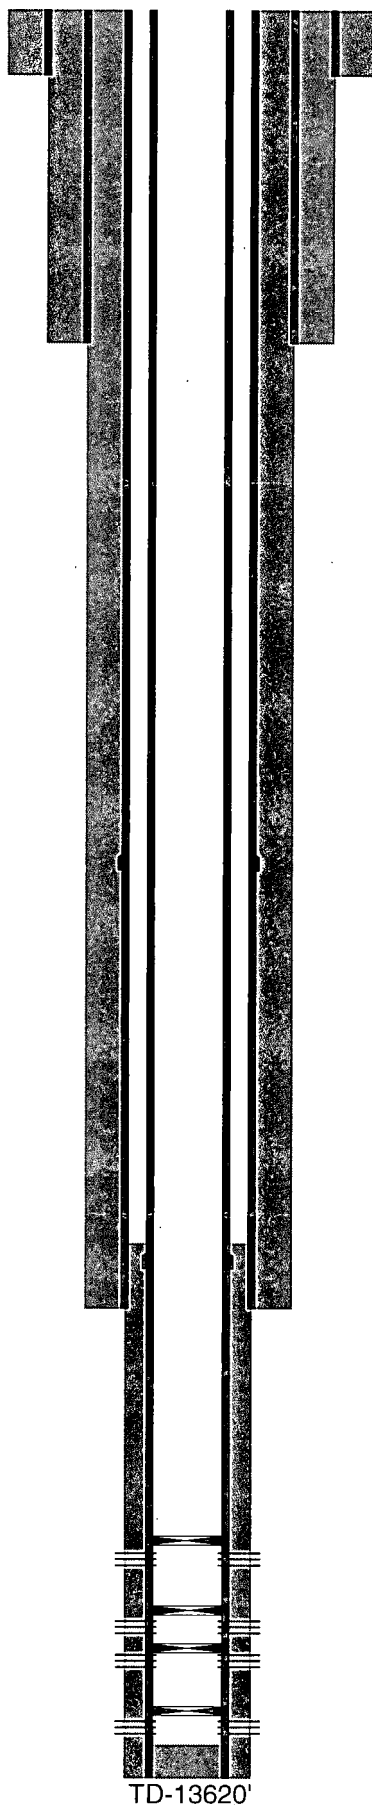

17-1/2" hole @ 380'
13-3/8" csg @ 380'
w/ 400sx-TOC-Surf-Circ

12-1/4" hole @ 2610'
9-5/8" csg @ 2610'
w/ 1125sx-TOC-Surf-Circ

8-3/4" hole @ 10150
7" csg @ 10132'
w/ 1550sx-TOC-Surf-Circ
DVT @ 6673'

6-1/8" hole @ 13620'
4-1/2" csg @ 13593'
w/ 280sx-TOC-9885'
DVT @ 9887'

CIBP @ 12060'

CIBP @ 12650' w/ 35' cmt to 12615'

CIBP @ 12925' w/ 15' cmt to 12910'

CIBP @ 13290' w/ 15' cmt to 13275'

Perfs @ 12102-12314'

Perfs @ 12691-12827'

Perfs @ 12958-12965'

Perfs @ 13362-13377'

TD-13620'