

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Minerals and Natural Resources
RECEIVED
OIL CONSERVATION DIVISION
 NOV 20 2019
 1220 South St. Francis Dr.
 Santa Fe, NM 87505
DISTRICT IV ARTESIA O.C.D.

Form C-103
 Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-26213
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator Chevron USA INC		6. State Oil & Gas Lease No.
3. Address of Operator 6301 Deauville BLVD, Midland, TX 79706		7. Lease Name or Unit Agreement Name South Culebra 23
4. Well Location Unit Letter <u>L</u> : <u>1920</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>West</u> line Section <u>23</u> Township <u>23S</u> Range <u>28E</u> NMPM County <u>Eddy</u>		8. Well Number 2
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3019 RKB		9. OGRID Number 371115
10. Pool name or Wildcat East Loving Brushy Canyon		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input checked="" type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> CLOSED-LOOP SYSTEM <input type="checkbox"/> OTHER: <input type="checkbox"/>		SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>	
---	--	---	--

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.
Notify OCD 24 hrs. prior to any work done.
Perfs 6086-6203

Chevron USA INC respectfully request to abandon this well as follows:

1. Call and notify NMOCD 24 hrs before operations begin.
2. Move in rig and rig up all CMT equipment - *CIBP @ 6000' w/25 sx cmt WOC + Tars*
3. RIH and set CIBP @ 5679' Pressure test @ 1000 psi for 10 minutes *missing files*
4. Spot 130 sx CL "C" cmt f/ 5679' t/ 4582', ~~do not~~ WOC & tag if casing passed a pressure test (perfs, Brushy Canyon) - *WOC + Tars*
5. Spot 30 sx of Class C CMT f/ 3520' t/ 3260' (DV Tool, Cherry Canyon)
6. Spot 50 sx of Class C CMT f/ 2658' to 2231' (BSalt, Lamar LS, Bell Canyon)
7. Spot 75 sx of Class C CMT f/ 602' to Surface (TSalt, Shoe, WB) - *Perf @ 602' + Attempt to Circ Cut to Surf*
8. Cut all casings & anchors & remove 3' below grade. Verify cement to surface & weld on dry hole marker as per, NMOCD requirements. Clean location.

*** SEE ATTACHED COA'S - *Revised*

MUST BE PLUGGED BY

11/21/20

I hereby certify that the information above is true and complete to the best of

SIGNATURE *Ricky Villanueva* TITLE Well P&A Project Manager DATE 10/23/2019

Type or print name Ricky Villanueva E-mail address: ryqg@chevron.com PHONE: 432-687-7786

For State Use Only

APPROVED BY: *[Signature]* TITLE Staff Mgr DATE 11/21/19

Conditions of Approval (if any):



SOUTH CULEBRA BLUFF 23 2

Loving East - 30-015-26213

Eddy County, New Mexico

L-23-23S-28E 1920 FSL 660 FWL


CURRENT COMPLETION - 5/2014, Updated by Y.Li on 8/5/2019

KB: 3,019.7'
DF: 3,018.9'

TOC @ surf
cmt w/ 125 sxs H
+12% thixad + 2%
CaCl; 200 sxs C +
4% gel + 2% CaCl,
tailed 100 sxs C +
2% CaCl.
8 5/8" csg @ 552'

TOC @ calc 50'
cmt w/ 750 sxs PSL C
salt Lead & 150 sxs
Class C tail
DV Tool @ 3406'

cmt w/ 300 sxs PSL
Lead and 200 sxs 50:50
Poz C + additives Tail
5 1/2" csg @ 6309'

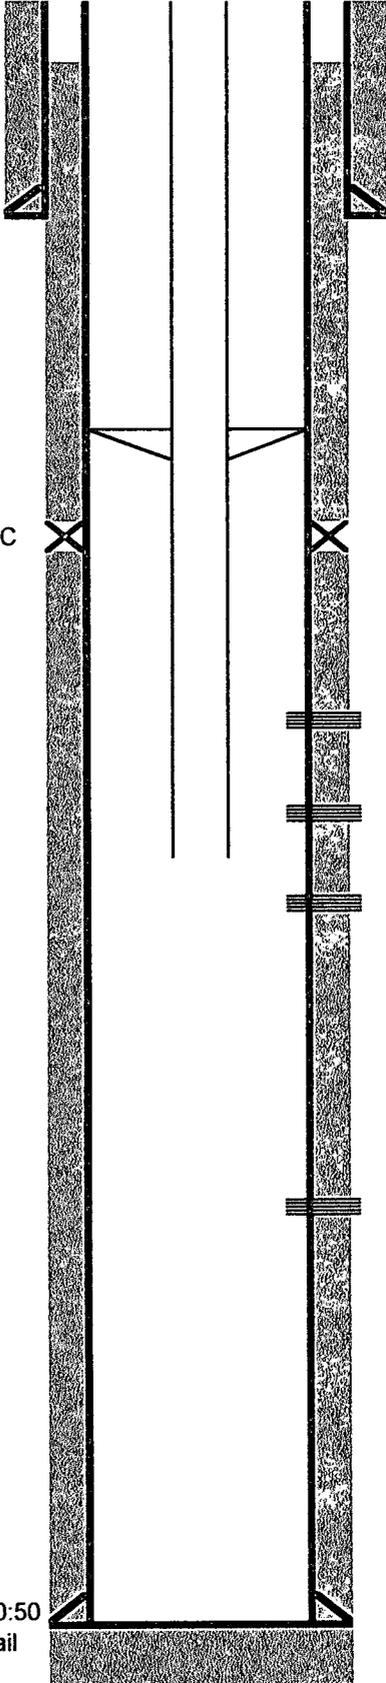

Spud Date: 11/2/1989
TD Date: 6/29/1990
Compl Date: 7/13/1990

CASING DETAIL					
Depth	Size	Weight	Grade	Hole Size	
552'	8 5/8"	24#	J-55	12 1/4"	
6309'	5 1/2"	15.5#	J-55	7 7/8"	

PRODUCTION TUBING					
Depth	Size	Weight	Grade	Threads	# Jts
5,940'	2 7/8"	6.5#	J-55	EUE	198
Estimated	Based on Vanguard Record				

ROD DETAIL	
Based on May 2018 Pump Change out report from RockCliff	1.5x22' polish rod 1 pony 7/8 @ 8' 92 rods 7/8 @ 2308' 120 rods 3/4 @ 5308' 25.150.RHBC.20.4 rod pump @ 5328'

Brushy Canyon "AA" frac'd in '05
5779' - 5808' -

Brushy canyon "A" frac'd in '05
5892' - 5894' -

Brushy Canyon "B" frac'd in '05
5986' - 5988' -

Brushy Canyon "C" & "D" frac'd in '89
6086' - 6203' - 28 holes

PBTD = 6,292'

This wellbore diagram is based on most recent information regarding wellbore configuration & equipment that could be found in Midland Office well files & computer / online databases as of above update date.

Note: This schematic is not to scale. For display purposes only.

SOUTH CULEBRA BLUFF 23 2

Loving East - 30-015-26213

Eddy County, New Mexico

L-23-23S-28E 1920 FSL 660 FWL

CURRENT COMPLETION - 5/2014, Updated by Y.Li on 8/5/2019

KB: 3,019.7'
DF: 3,018.9'

TOC @ surf


cmt w/ 125 sxs H +12%
thixad + 2% CaCl; 200 sxs C
+ 4% gel + 2% CaCl, tailed
100 sxs C + 2% CaCl.
8 5/8" csg @ 552'

TOC @ calc 50'

cmt w/ 750 sxs PSL C salt Lead
& 150 sxs Class C tail
DV Tool @ 3406'

Formation Name	Depth (MD)
T Salt	540
B Salt	2,367
Lamar LS	2,580
Bell Canyon	2,608
Cherry Canyon	3,470
Brushy Canyon	4,694
Bone Spring	6,211
1st Bone Spring	below TD

cmt w/ 300 sxs PSL Lead and
200 sxs 50:50 Poz C + additives
Tail
5 1/2" csg @ 6309'

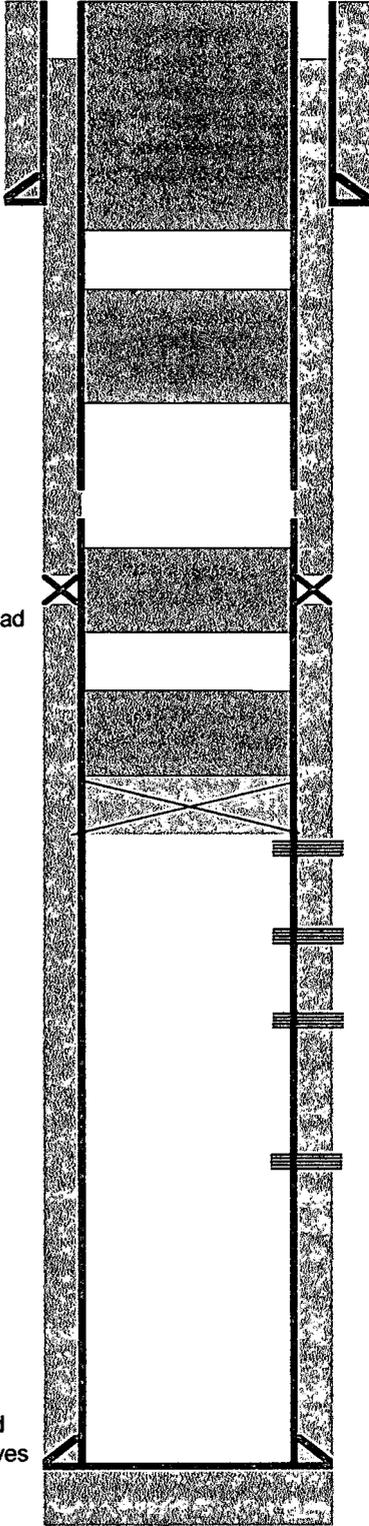

Spud Date: 11/2/1989
TD Date: 6/29/1990
Compl Date: 7/13/1990

CASING DETAIL				
Depth	Size	Weight	Grade	Hole Size
552'	8 5/8"	24#	J-55	12 1/4"
6309'	5 1/2"	15.5#	J-55	7 7/8"

Spot 75 sx of Class C CMT f/ 602' to Surface
(T Salt, Shoe, WB)

Spot 50 sx of Class C CMT f/ 2658' to 2231'
(B Salt, Lamar LS, Bell Canyon)

Spot 30 sx of Class C CMT f/ 3520' to 3260'
(DV Tool, Cherry Canyon)

Spot 130 sx of Class C CMT f/ 5679' to 4582'
Pressure Test @ 1000 psi for 10 minutes
(Brushy Canyon) WOC-Tag
Set CIBP @ 5679'

Brushy Canyon "AA" frac'd in '05
5779' - 5808' -

Brushy canyon "A" frac'd in '05
5892' - 5894' -

Brushy Canyon "B" frac'd in '05
5986' - 5988' -

Brushy Canyon "C" & "D" frac'd in '89
6086' - 6203' - 28 holes

PBTD = 6,292'

This wellbore diagram is based on most recent information regarding wellbore configuration & equipment that could be found in Midland Office well files & computer / online databases as of above update date.

Note: This schematic is not to scale. For display purposes only.

CONDITIONS FOR PLUGGING AND ABANDONMENT

OCD - Southern District

The following is a guide or checklist in preparation of a plugging program, this is not all inclusive and care must be exercised in establishing special plugging programs in unique and unusual cases, Notify NMOCD District Office II at (575)-748-1283 at least 24 hours before beginning work. After MIRU rig will remain on well until it is plugged to surface. OCD is to be notified before rig down. Company representative will be on location during plugging procedures.

1. A notice of intent to plug and abandon a wellbore is required to be approved before plugging operations are conducted. A cement evaluation tool is required in order to ensure isolation of producing formations, protection of water and correlative rights. A cement bond log or other accepted cement evaluation tool is to be provided to the division for evaluation if one has not been previously run or if the well did not have cement circulated to surface during the original casing cementing job or subsequent cementing jobs.
2. Closed loop system is to be used for entire plugging operation. Upon completion, contents of steel pits are to be hauled to a permitted disposal location.
3. Trucking companies being used to haul oilfield waste fluids to a disposal – commercial or private – shall have an approved NMOCD C-133 permit. A copy of this permit shall be available in each truck used to haul waste products. It is the responsibility of the operator as well as the contractor, to verify that this permit is in place prior to performing work. Drivers shall be able to produce a copy upon request of an NMOCD Field inspector.
4. Filing a subsequent C-103 will serve as notification that the well has been plugged.
5. A final C-103 shall be filed (and a site inspection by NMOCD Inspector to determine if the location is satisfactorily cleaned, all equipment, electric poles and trash has been removed to Meet NMOCD standards) before bonding can be released.
6. If work has not begun within 1 Year of the approval of this procedure, an extension request must be file stating the reason the well has not been plugged.
7. Squeeze pressures are not to exceed 500 psi, unless approval is given by NMOCD.
8. Produced water will not be used during any part of the plugging operation.
9. Mud laden fluids must be placed between all cement plugs mixed at 25 sacks per 100 bbls of water.
10. All cement plugs will be a minimum of 100' in length or a minimum of 25 sacks of cement, whichever is greater. 50' of calculated cement excess required for inside casing plugs and 100% calculated cement excess required on outside casing plugs.
11. Class 'C' cement will be used above 7500 feet.
12. Class 'H' cement will be used below 7500 feet.
13. A cement plug is required to be set 50' above and 50' below, casing stubs, DV tools, attempted casing cut offs, cement tops outside casing, salt sections and anywhere the casing is perforated, these plugs require a 4 hour WOC and then will be tagged
14. All Casing Shoes Will Be Perforated 50' below shoe depth and Attempted to be Squeezed, cement needs to be 50' above and 50' Below Casing Shoe inside the Production Casing.

16. When setting the top out cement plug in production, intermediate and surface casing, wellbores should remain full at least 30 minutes after plugs are set
17. A CIBP is to be set within 100' of production perforations, capped with 100' of cement, WOC 4 hours and tag.
18. A CIBP with 35' of cement may be used in lieu of the 100' plug if set with a bailer. This plug will be placed within 100' of the top perforation, (WOC 4 hrs and tag).
19. No more than 3000' is allowed between cement plugs in cased hole and 2000' in open hole.
20. Some of the Formations to be isolated with cement plugs are: These plugs to be set to isolate formation tops
 - A) Fusselman
 - B) Devonian
 - C) Morrow
 - D) Wolfcamp
 - E) Bone Springs
 - F) Delaware
 - G) Any salt sections
 - H) Abo
 - I) Glorieta
 - J) Yates.
 - K) Potash--- (In the R-111-P Area (Potash Mine Area), a solid cement plug must be set across the salt section. Fluid used to mix the cement shall be saturated with the salts that are common to the section penetrated and in suitable proportions, not more than 3% calcium chloride (by weight of cement) will be considered the desired mixture whenever possible, WOC 4 hours and tag, this plug will be 50' below the bottom and 50' above the top of the Formation.
21. If cement does not exist behind casing strings at recommended formation depths, the casing can be cut and pulled with plugs set at recommended depths. If casing is not pulled, perforations will be shot and cement squeezed behind casing, WOC and tagged. These plugs will be set 50' below formation bottom to 50' above formation top inside the casing

DRY HOLE MARKER REQUIREMENTS

The operator shall mark the exact location of the plugged and abandoned well with a steel marker not less than four inches in diameter, 3' below ground level with a plate of at least ¼" welded to the top of the casing and the dry hole marker welded on the plate with the following information welded on the dry hole marker:

1. Operator name
 2. Lease and Well Number
 3. API Number
 4. Unit Letter
 5. Quarter Section (feet from the North, South, East or West)
 6. Section, Township and Range
 7. Plugging Date
 8. County
- (SPECIAL CASES)-----AGRICULTURE OR PRARIE CHICKEN BREEDING AREAS

In these areas, a below ground marker is required with all pertinent information mentioned above on a plate, set 3' below ground level, a picture of the plate will be supplied to NMOCD for record, the exact location of the marker (longitude and latitude by GPS) will be provided to NMOCD (We typically require a current survey to verify the GPS)