

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-ARTESIA

FORM APPROVED
OMB NO. 1004-0135
Expires: November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

NOV - 1 2008

2. Name of Operator
OXY USA Inc.

OCD-ARTESIA

16696

3a. Address
P.O. Box 50250 Midland, TX 797103b. Phone No. (include area code)
432-685-57174. Location of Well (Footage, Sec., T., R., M., or Survey Description)
1830 FNL 660 FWL SWNW(E) Sec 33 T23S R31E

5. Lease Serial No.

NM45236

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

Sterling Silver 33 #4
Federal

9. API Well No.

30-015-27519

10. Field and Pool, or Exploratory Area
Sand Dunes, West Delaware

11. County or Parish, State

Eddy

NM

ACCEPTED FOR RECORD

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Acidize ☐ Deepen ☐ Production (Start/Resume) ☐ Water Shut-Off
☐ Alter Casing ☐ Reclamation ☐ Well Integrity
☐ Casing Repair ☐ New Construction ☐ Recomplete ☐ Other
☐ Change Plans ☒ Plug and Abandon ☐ Temporarily Abandon
☐ Convert to Injection ☐ Plug Back ☐ Water Disposal

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.)

TD-8130' PBDT-7810' Perfs-7874-7914' CIBP-7810'

13-3/8" 48# csg @ 595' w/ 800sx, 17-1/2" hole, TOC-Surf-Circ

8-5/8" 32# csg @ 4161' w/ 1800sx, 12-1/4" hole, TOC-Surf-Circ

5-1/2" 15.5-17# csg @ 8130' w/650sx, DVT @ 6062' 7-7/8" hole, TOC-6890, 3100-1900'-CBL

1. RIH & Tag CIBP @ 7810' M&P 25sx cmt
 2. Perf @ 6145' sqz 65sx cmt to 5980' WOC-Tag
 3. Perf @ 5190' sqz 60sx cmt to 5035' WOC-Tag
 4. Perf @ 4215' sqz 115sx cmt to 3905' WOC-Tag
 5. Perf @ 1020' sqz 40sx cmt to 910' WOC-Tag
 6. Perf @ 645' sqz 40sx cmt to 545' WOC-Tag
 7. Perf @ 150' sqz 60sx cmt to Surface
- 10# MLF between plugs

SEE ATTACHED FOR
CONDITIONS OF APPROVAL
Secretary's Potash / Rill P

* Solid plug required from 4215'-545' in/out of 5 1/2" csg. Stages will be required due to cmt conditions. Verify cmt tops during operations by tagging.
Steps 1, 2, 3 & 7 OK as is.

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

David Stewart

Title

Sr. Regulatory Analyst

Date

10/17/08

APPROVED

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

NOV 1 2008

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

JAMES A. AMOS
SUPERVISOR-EPG

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**OXY USA Inc. - Proposed
Sterling Silver 33 Federal #4
API No. 30-015-27519**

60sx @ 150'-Surface

40sx @ 645-545' Woc-Tag

40sx @ 1020-910' Woc-Tag

115sx @ 4215-3905' WOC-Tag


60sx @ 5190-5035' WOC-Tag

65sx @ 6145-5980' WOC-Tag

25sx @ 7810'

7/08-CIBP @ 7810'

PBTD-8082'

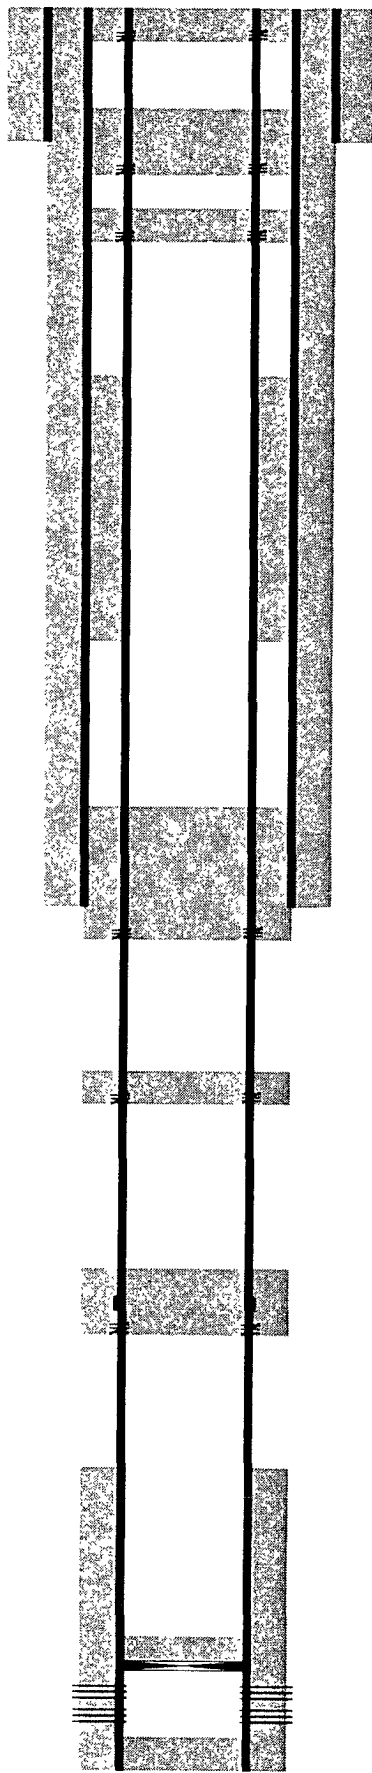

Perf @ 150'

Perf @ 645'

Perf @ 1020'

Perf @ 4215'

Perf @ 5190'

Perf @ 6145'

Perfs @ 7874-7914'

17-1/2" hole @ 595'
13-3/8" csg @ 595'
w/ 800sx-TOC-Surf-Circ

12-1/4" hole @ 4161'
8-5/8" csg @ 4161'
w/ 1800sx-TOC-Surf-Circ

7-7/8" hole @ 8130'
5-1/2" csg @ 8130'
DVT @ 6062'
1st w/ 650sx-
TOC-6890', 3100-1900'-CBL

TD-8130'

OXY USA Inc. - Current
Sterling Silver 33 Federal #4
API No. 30-015-27519

17-1/2" hole @ 595'
13-3/8" csg @ 595'
w/ 800sx-TOC-Surf-Circ

12-1/4" hole @ 4161'
8-5/8" csg @ 4161'
w/ 1800sx-TOC-Surf-Circ

7-7/8" hole @ 8130'
5-1/2" csg @ 8130'
DVT @ 6062'
1st w/ 650sx-
TOC-6890', 3100-1900'-CBL

7/08-CIBP @ 7810'

PBTD-8082'

Perfs @ 7874-7914'

TD-8130'