

JAN 16 2009  
**OCD-ARTESIA****OCD-ARTESIA**EA-09-243  
ATS-09-153UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

## APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5 Lease Serial No NMNM-71752
1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6 If Indian, Allottee or Tribe Name
2 Name of Operator Devon Energy Production Co., LP		7 If Unit or CA Agreement, Name and No
3a Address 20 North Broadway OKC, OK 73102		8 Lease Name and Well No Rifleman 6 Fed Com 4H
3b Phone No. (include area code) (405)-552-7802		9 API Well No 30-015-36910
4 Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SESW 1320' FSL & 1320' FWL At proposed prod zone NESW 1980' FSL & 1980' FWL		10 Field and Pool, or Exploratory Happy Valley; Morrow
11. Sec, T R M or Blk and Survey or Area Sec 6 T22S-R26E		
14 Distance in miles and direction from nearest town or post office* Approximately 3 1/2 miles west of Carlsbad, NM.		12 County or Parish Eddy
		13 State NM
15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drg unit line, if any) 1320'	16 No. of acres in lease 518.15	17 Spacing Unit dedicated to this well 320
18 Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft 2008'	19 Proposed Depth 11,400' TVD 11530' MD	20 BLM/BIA Bond No. on file CO-1104
21 Elevations (Show whether DF, KDB, RT, GL, etc) 3636' CL	22 Approximate date work will start* 01/15/2009	23 Estimated duration 45 days

## 24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, must be attached to this form

- |   |  |
|---|--|
| 1. Well plat certified by a registered surveyor.  | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above) |
| 2. A Drilling Plan.   | 5. Operator certification  |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office) | 6. Such other site specific information and/or plans as may be required by the BLM             |

25 Signature 	Name (Printed Typed) Stephanie A. Ysasaga	Date 12/01/2008
Title Sr. Staff/Engineering Technician		
Approved by (Signature) /s/ James Stovall	Name (Printed Typed)	Date JAN 8 2009
Title FIELD MANAGER		Office CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.**APPROVAL FOR TWO YEARS**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

\*(Instructions on page 2)

Carlsbad Controlled Water Basin

**SEE ATTACHED FOR  
CONDITIONS OF APPROVAL****Approval Subject to General Requirements  
& Special Stipulations Attached**

RECEIVED  
1-22-09

DISTRICT I  
1625 N. French Dr., Hobbs, NM 88240

DISTRICT II  
1301 W. Grand Avenue, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, New Mexico 87505

Form C-102  
Revised October 12, 2005

Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number <b>30.015.36910</b>	Pool Code <b>78060</b>	Pool Name <b>HAPPY VALLEY; MORROW</b>
Property Code <b>37568</b>	Property Name <b>RIFLEMAN 6 FED COM</b>	Well Number <b>4H</b>
OGRID No. <b>6137</b>	Operator Name <b>DEVON ENERGY PRODUCTION COMPANY LP</b>	Elevation <b>3636'</b>


Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	6	22 S	26 E		1320	SOUTH	1320	WEST	EDDY


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	6	22 S	26 E		1980	SOUTH	1980	WEST	EDDY
Dedicated Acres <b>320</b>	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

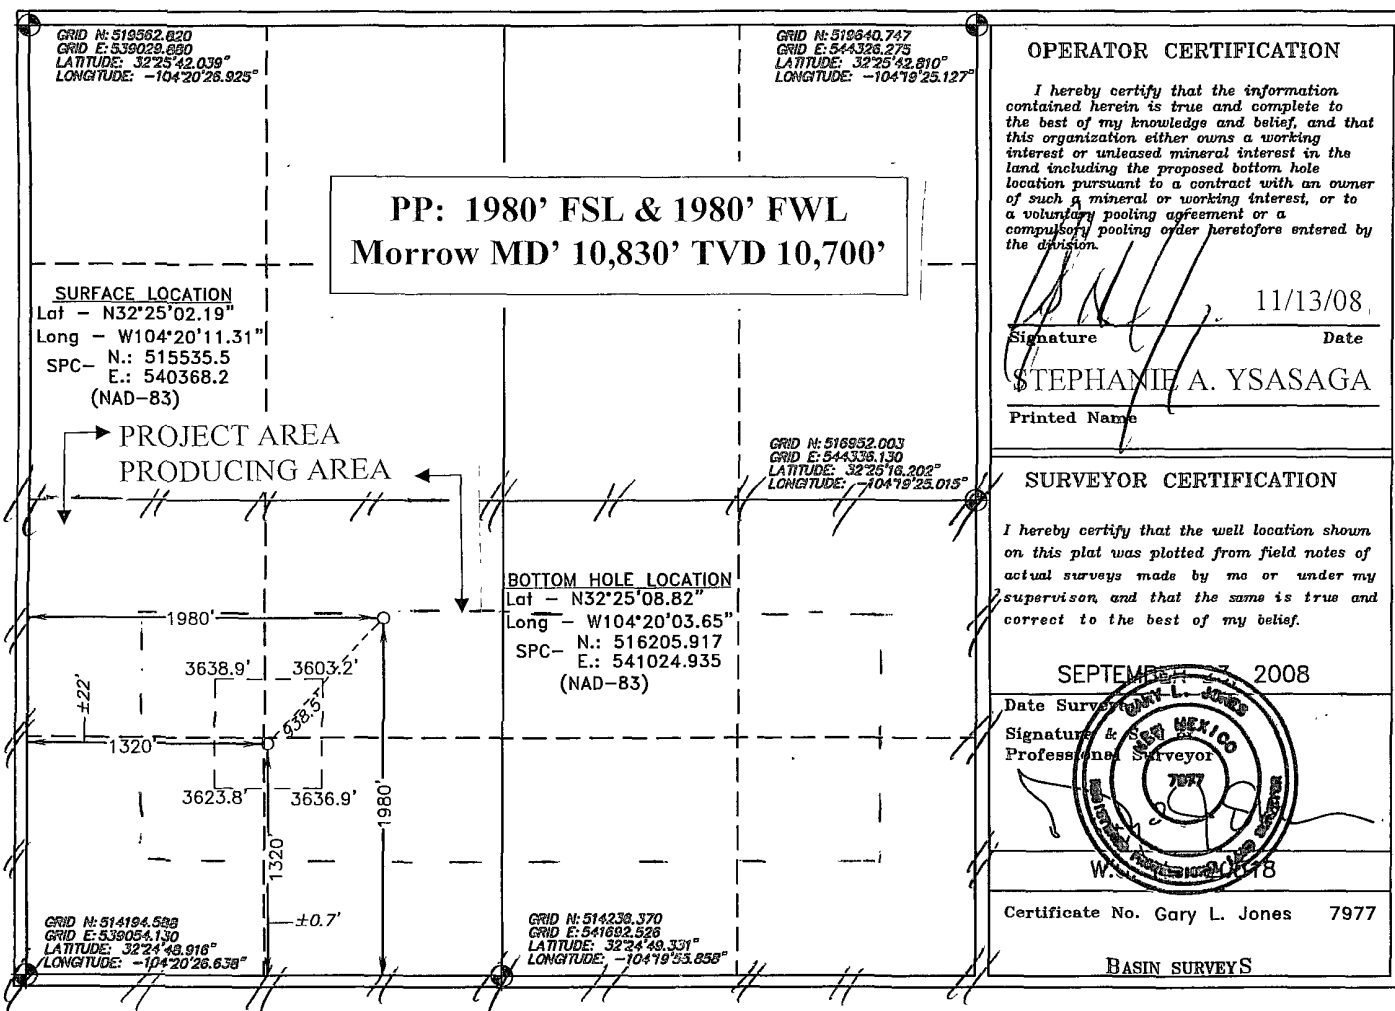


SECTION 6, TOWNSHIP 22 SOUTH, RANGE 26 EAST, N.M.P.M.,  
EDDY COUNTY, NEW MEXICO.

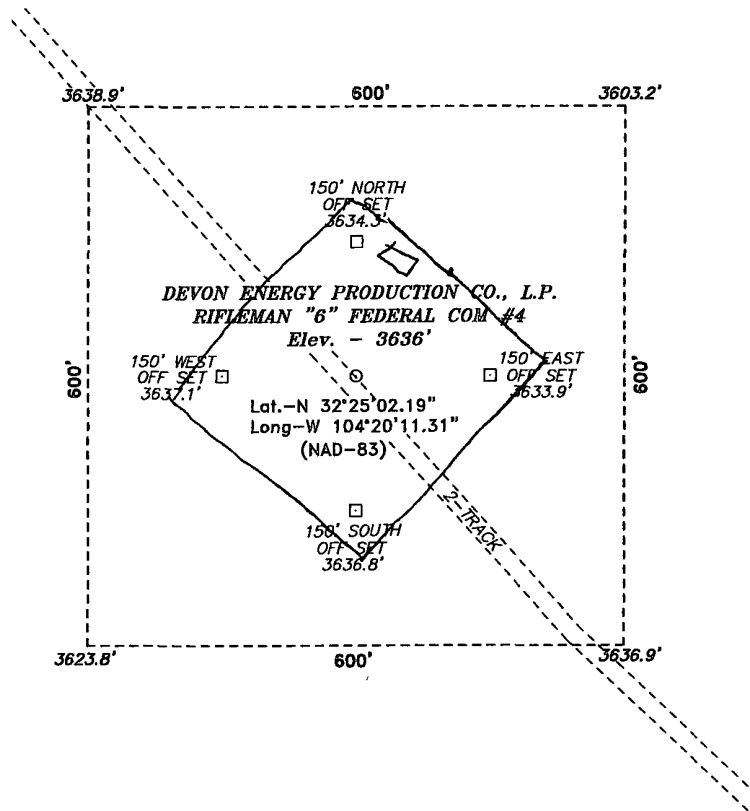

Directions to Location:

FROM THE JUNCTION OF CO. RD. JONES AND CO.  
RD. BITTER CHERRY, GO WEST 1.6 MILES TO  
2-TRACK, ON 2-TRACK GO NORTH 0.3 MILES TO  
PROPOSED LOCATION.



**DEVON ENERGY PROD. CO., L.P.**

REF: RIFLEMAN "6" FEDERAL COM #4 / WELL PAD TOPO

THE RIFLEMAN "6" FEDERAL COM #4 LOCATED 1320' FROM

THE SOUTH LINE AND 1320' FROM THE WEST LINE OF

SECTION 6, TOWNSHIP 22 SOUTH, RANGE 26 EAST,

N.M.P.M., EDDY COUNTY, NEW MEXICO.

**BASIN SURVEYS** P.O. BOX 1786-HOBBS, NEW MEXICO

W.O. Number: 20518

Drawn By: J. M. SMALL


Date: 09-25-2008

Disk: 20518 JMS

Survey Date: 09-23-2008

Sheet 1 of 1 Sheets



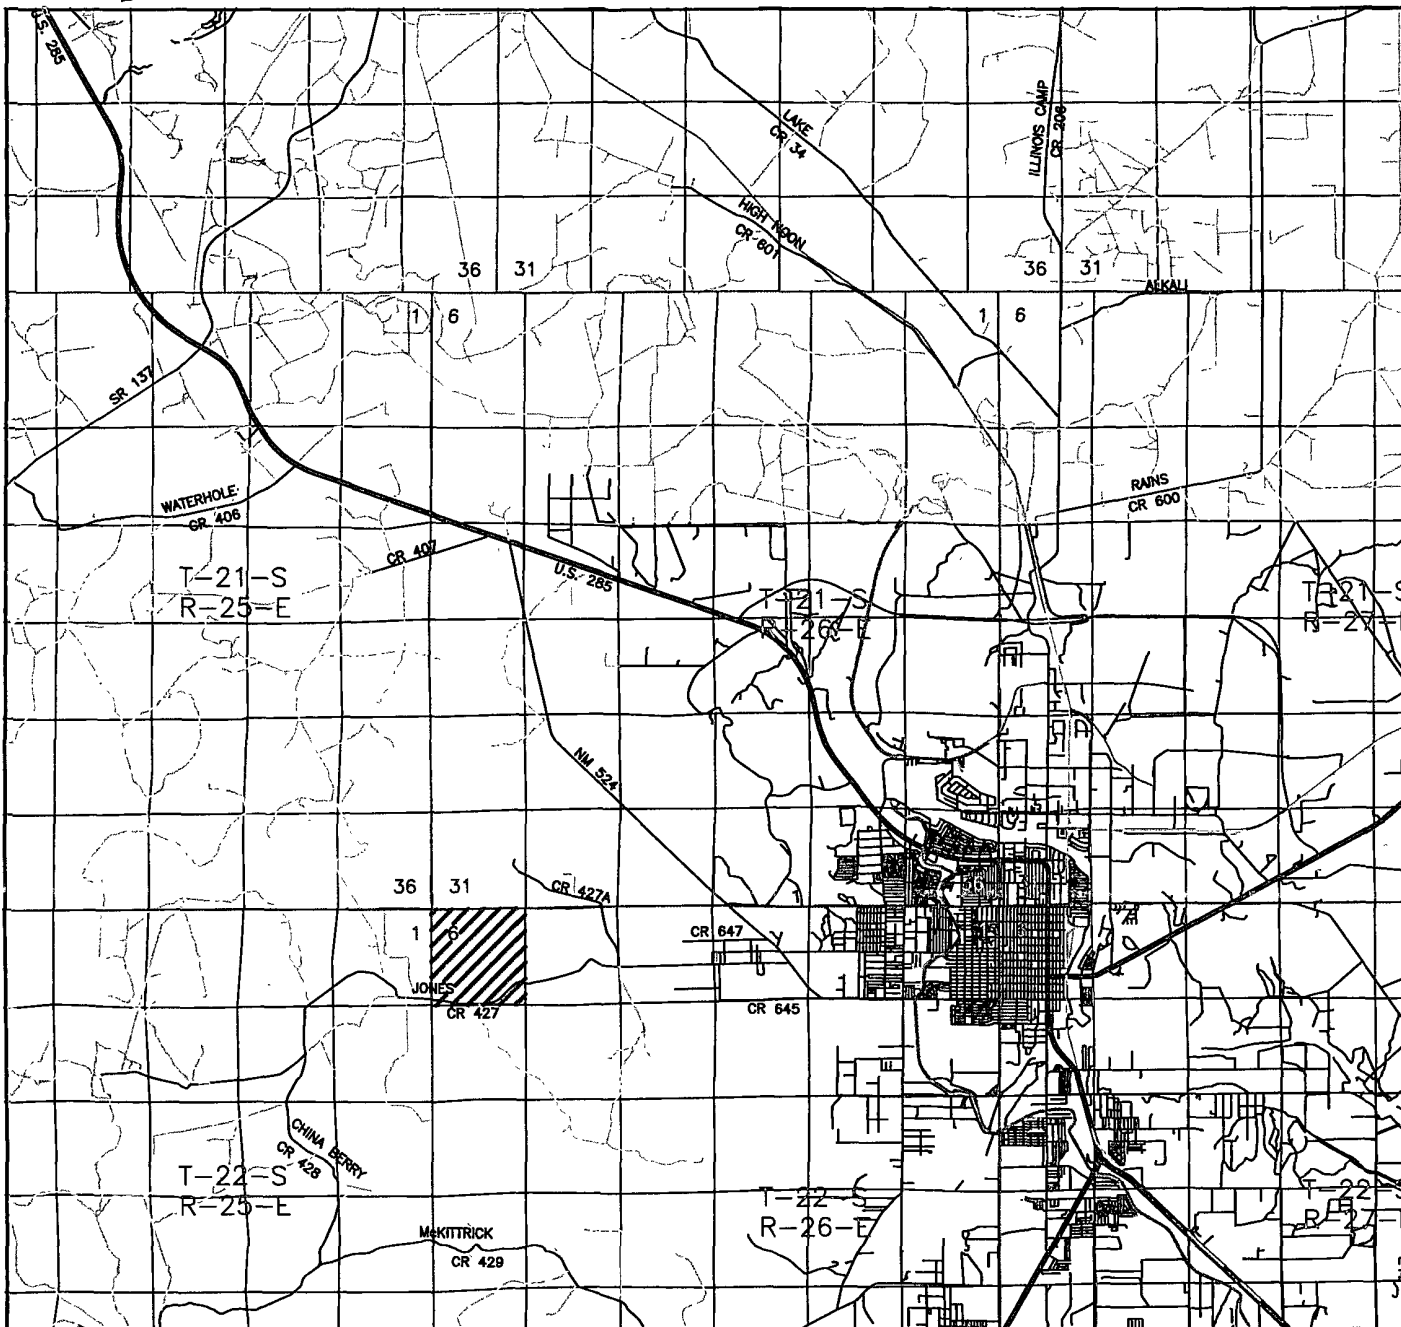

RIFLEMAN "6" FEDERAL COM #4  
 Located at 1320' FSL AND 1320' FWL  
 Section 6, Township 22 South, Range 26 East,  
 N.M.P.M., Eddy County, New Mexico.

**basin**  
**surveys**

focused on excellence  
 in the oilfield

P.O. Box 1786  
 1120 N. West County Rd.  
 Hobbs, New Mexico 88241  
 (575) 393-7316 - Office  
 (575) 392-2206 - Fax  
 basinsurveys.com


W.O. Number: JMS 20518

Survey Date: 09-23-2008

Scale: 1" = 2 MILES

Date: 09-25-2008

DEVON ENERGY  
 PROD. CO., L.P.

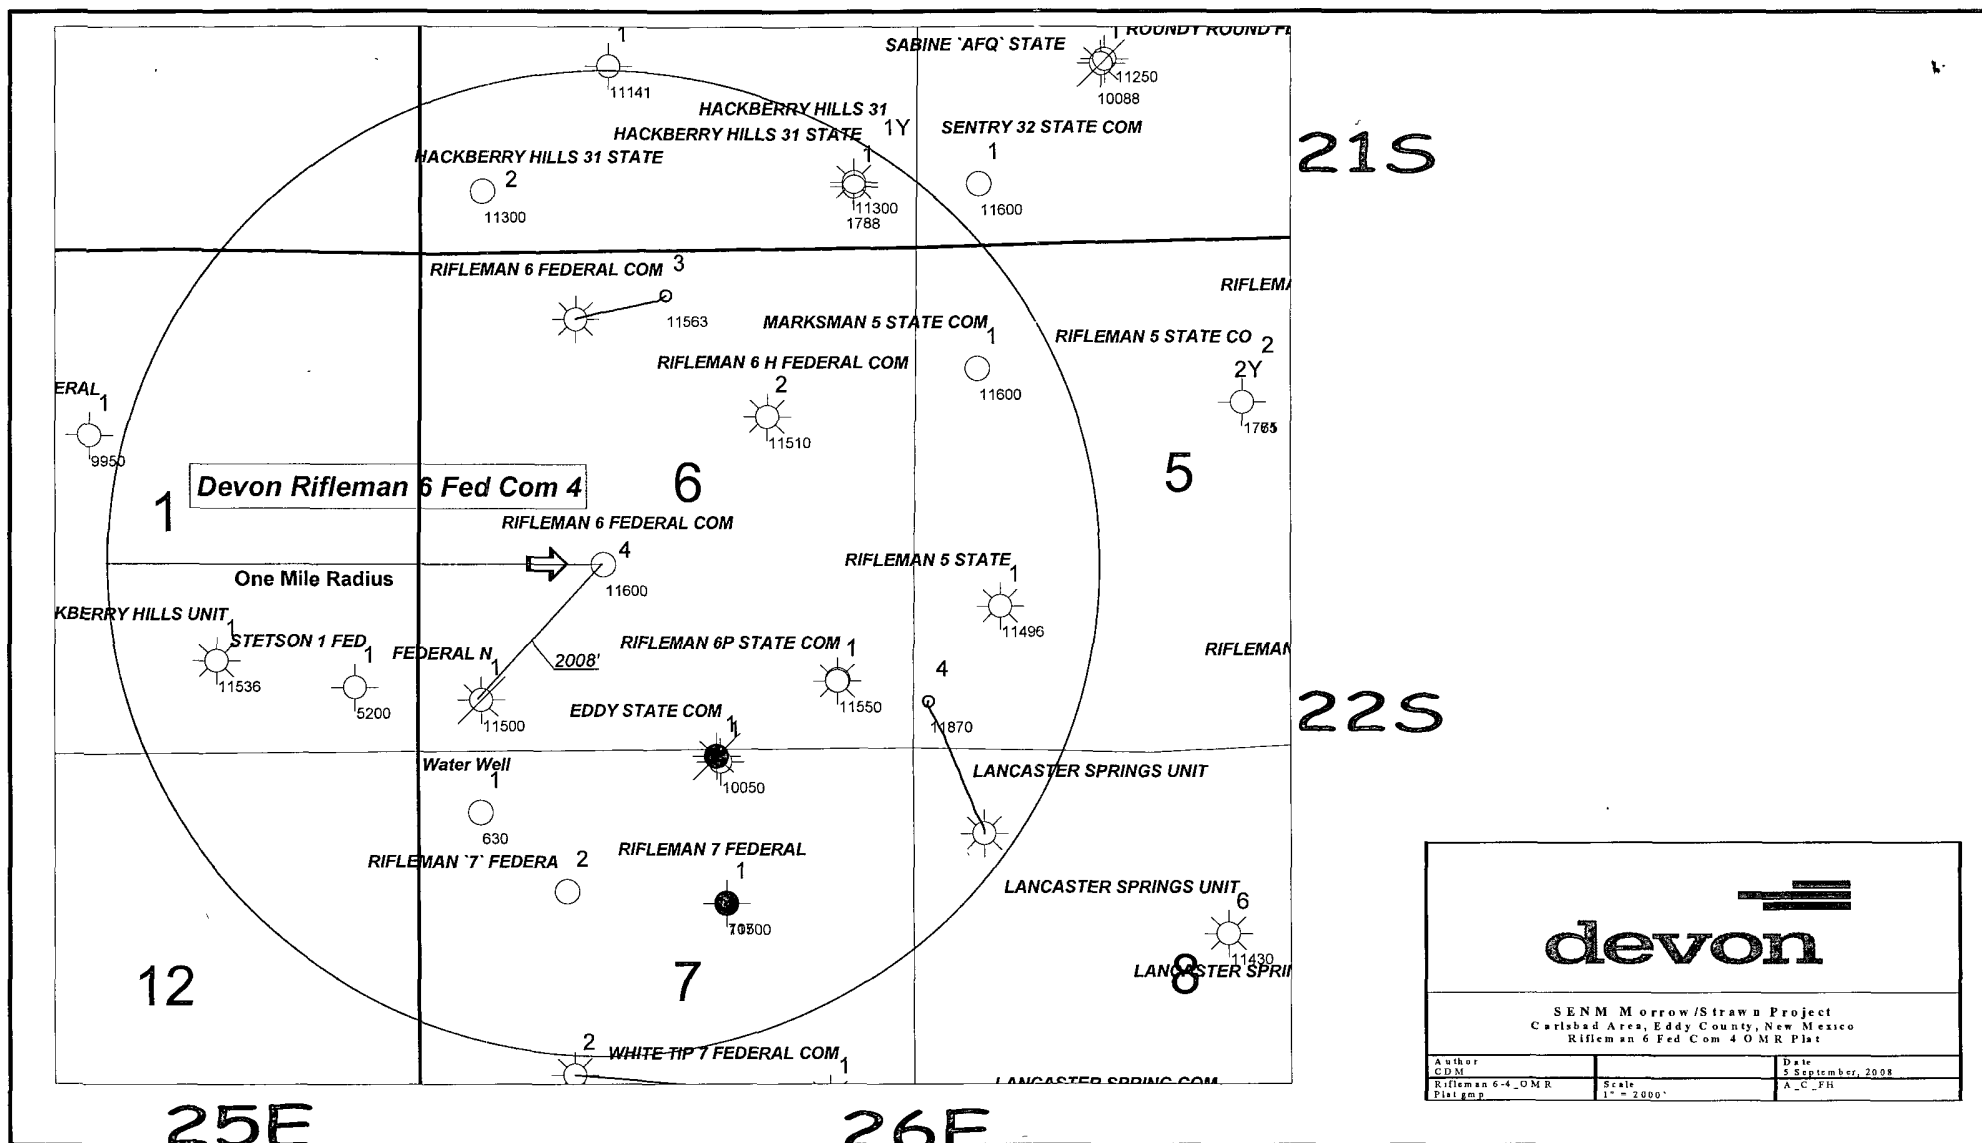

## DRILLING PROGRAM

Devon Energy Production Company, LP

### **Rifleman 6 Fed Com 4H**

Surface Location: 1320' FSL & 1320' FWL, Unit N, Sec 6 T22S R26E, Eddy, NM

Bottom hole Location: 1980' FSL & 1980' FWL, Unit K, Sec 6 T22S R26E, Eddy, NM

#### **1. Geologic Name of Surface Formation**

- a. Quaternary

#### **2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:**

a. Seven Rivers	Surface	Fresh Water
b. Capitan	445'	Fresh Water
c. Delaware Mtn Group	2260'	Barren
d. Delaware Sd	2450'	Oil
e. Bone Spring Lime	4750'	Oil
f. 3 <sup>rd</sup> Bone Spring Sd	8025'	Oil
g. Wolfcamp Lm	8425'	Gas
h. Penn	9300'	Gas
i. Canyon Lm	9775'	Gas
j. Strawn	9925'	Gas
k. Atoka	10250'	Gas
l. Morrow	10700'	Gas
m. Middle Morrow	11000'	Gas
n. Lower Morrow	11225'	Gas
o. Barnett	11325'	Gas
p. Total Depth	11400' TVD 11530' MD	

No other formations are expected to yield oil, gas or fresh water in measurable volumes. The surface fresh water sands will be protected by setting 13 3/8" casing at 600' and circulating cement back to surface. Fresh water sands will be protected by setting 9 5/8" casing at ~~2450'~~ and circulating cement to surface. The Morrow intervals will be isolated by setting 5 1/2" casing to total depth and circulating cement to surface. see COA

#### **3. Casing Program:**

	<u>Hole</u> <u>Size</u>	<u>Hole</u> <u>Interval</u>	<u>OD Csg</u>	<u>Casing</u> <u>Interval</u>	<u>Weight</u>	<u>Collar</u>	<u>Grade</u>
	30"	0' - 40'	20"	0' - 40'	N/A	N/A	Conductor
See	17 1/2"	0' - 600'	13 3/8"	0' - 600'	48#/ft	ST&C	H-40
COA	12 1/4"	600' - 2450'	9 5/8"	0' - 2450'	36#/ft	LT&C	J-55
	8 3/4"	2450' - 11400' TVD	5 1/2"	0' - 11400' TVD 0' - 11530' MD	17#/ft	LT&C	P-110

#### Design Parameter Factors:

<u>Casing Size</u>	<u>Collapse Design</u>	<u>Burst Design</u>	<u>Tension Design</u>
	<u>Factor</u>	<u>Factor</u>	<u>Factor</u>
13 3/8"	2.57	1.40	2.26
9 5/8"	1.95	1.85	2.56
5 1/2"	1.19	1.77	1.69

#### 4. Cement Program:

- a. 13 3/8" Surface Cement **Lead Slurry:** 305 sacks (35:65) Poz (Fly Ash): Premium Plus C Cement + 5% bwow Sodium Chloride + 0.125 lbs/sack Cello Flake + 4% bwoc Bentonite + 1% bwoc Sodium Metasilicate + 5% bwoc MPA-5 + 101.3% Fresh Water. **Yield:** 1.97 cf/sack. **Tail** w/200 sacks Premium Plus C Cement + 2% bwoc Calcium Chloride + 0.125 lbs/sack Cello Flake + 56.3% Fresh Water. **Yield:** 1.35 cf/sack. **Displacement:** 87.9 bbls mud @ 9ppg. TOC to surface.
- b. 9 5/8" Intermediate Cement **Lead Slurry:** 765 sacks (35:65) Poz (Fly Ash): Premium Plus C Cement + 5% bwow Sodium chloride + 0.125 lbs/sack Cello Flake + 5 lbs/sack LCM-1 + 6% bwoc bentonite + 95.8% Fresh Water; **Yield:** 1.95 cf/sack. **Tail Slurry:** 250 sacks (60:40) Poz (Fly Ash): Premium Plus C Cement + 5% bwow Sodium chloride + 0.5% bwoc sodium Metasilicate + 4% bwoc MPA-5 + 64.8% Fresh Water; **Yield:** 1.34 cf/sack. **Displacement:** 186.3 bbls Mud @ 8.5 ppg. TOC to surface.
- c. 5 1/2" Production Cement with **Stage 1:**  
**Cement Slurry:** 740 sacks (15:61:11) Poz (Fly Ash): Premium Plus C Cement: CSE-2 + 0.3% bwoc R-3 + 1% bwow Potassium Chloride + 0.75% bwoc EC-1 + 0.125 lbs/sack Cello Flake + 0.4% bwoc CD-32 + 3 lbs/sack LCM-1 + 0.6% bwoc FL-25 + 0.6 bwoc FL-52A + 72.3% Fresh Water; **Yield:** 1.57 cf/sack.  
**Displacement:** 266.2 bbls Displacement Fluid.
- Stage 2**  
**Lead Slurry:** 1125 sacks (35:65) Poz (Fly Ash): Class H Cement + 0.125 lbs/sack Cello Flake + 3 lbs/sack LCM-1 + 6% bwoc bentonite + 0.4% bwoc FL-52A + 99.3% Fresh water; **Yield:** 1.94 cf/sack. **Tail Slurry:** 635 sacks (60:40) Poz (Fly Ash): Class H Cement + 1% bwow Sodium Chloride + 0.75% bwoc BA-10 + 0.1% woc R-3 + 2 lbs/sack Kol Seal + 4% bwoc MPA-1 + 0.125 lbs/sack Cello Flake + 61.3% Fresh Water; **Yield:** 1.35 cf/sack.  
**Displacement:** 197.6 bbls Displacement Fluid . DV tool @ 8500'. TOC to surface.



The above cement volumes could be revised pending the caliper measurement from the open hole logs. All casing is new and API approved.

**5. Pressure Control Equipment:**

The blowout preventor equipment (BOP) shown in Exhibit #1 will consist of a (5M system) double ram type (5000 psi WP) preventor and a bag-type (Hydril) preventor (3000 psi WP) and rotating head. Both units will be hydraulically operated and the ram type preventor will be equipped with blind rams on top and 4 1/2" drill pipe rams on bottom. An annular and rotating head will be installed on the 13 3/8" surface casing and utilized to setting depth of the 9 5/8" intermediate casing. The annular and associated equipment will be tested to ~~1000 psi~~ **with the rig pump before drilling out the 13-3/8" casing shoe.** The BOPE will be installed on the 9 5/8" intermediate casing and utilized continuously until total depth is reached. Prior to drilling out the 9-5/8" casing shoe, the BOP's and Hydril will be tested as per BLM Drilling Operations Order #2.

Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drillers log. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines and choke manifold having 5000 psi WP rating.

**6. Proposed Mud Circulation System**

<u>Depth</u>	<u>Mud Wt.</u>	<u>Visc</u>	<u>Fluid Loss</u>	<u>Type System</u>
0' - 625'	8.6-9.4	32-34	NC	Fresh Water
625' - 2350'	8.4-8.5	28-29	NC	Fresh Water
2350' - 8000'	8.4-8.5	28	NC	Fresh Water
8000' - 9800'	9.5-9.8	28	NC	Cut Brine Water
9800' - <del>11400'</del> 11530'	9.2-10.2	36-48	6-10cc	Brine/Polymer

The necessary mud products for weight addition and fluid loss control will be on location at all times.

**7. Auxiliary Well Control and Monitoring Equipment:**

- A Kelly cock will be in the drill string at all times.
- A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- Hydrogen Sulfide detection equipment will be in operation after drilling out the 13 3/8" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 13 3/8" shoe until total depth is reached.

**8. Logging, Coring, and Testing Program:**


- Drill stem tests will be based on geological sample shows.
- If a drill stem test is anticipated; a procedure, equipment to be used and safety measures will be provided via sundry notice to the BLM.
- The open hole electrical logging program will be:
  - Total Depth to Intermediate Casing      Dual Laterolog-Micro Laterolog with SP and Gamma Ray. Compensated Neutron - Z Density log with Gamma Ray and Caliper.



# devon

## Devon Energy

Project: Eddy County (NM27E)  
Site: Sec. 6-T22S-R26E  
Well: Rifleman 6 Fed Com 4  
Wellbore: Wellbore #1  
Design: Plan #1



### WELL DETAILS. Rifleman 6 Fed Com 4

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.43	-0.43	3903.235	4015.962	31° 0' 3.700 N	105° 54' 58.654 W

### SECTION DETAILS



Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.43	-0.43	0.00	0.00	0.00	
2	4750.00	0.00	0.00	4750.00	0.43	-0.43	0.00	0.00	0.00	
3	5311.15	16.83	45.04	5303.11	58.27	57.48	3.00	45.04	81.85	
4	7968.82	16.83	45.04	7846.89	602.16	602.09	0.00	0.00	851.53	
5	8529.97	0.00	0.00	8400.00	660.00	660.00	3.00	180.00	933.38	Rifleman 6 Fed TGT 1
6	11529.97	0.00	0.00	11400.00	660.00	660.00	0.00	0.00	933.38	

### WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Rifleman 6 Fed Com 4 TGT 1	8400.00	660.00	660.00	4553.336	4685.715	Point

### REFERENCE INFORMATION

Co-ordinate (N/E) Reference: Well Rifleman 6 Fed Com 4, True North  
Vertical (TVD) Reference: WELL @ 0.00ft (Original Well Elev)  
Section (VS) Reference: Slot - (0.43N, -0.43E)  
Measured Depth Reference: WELL @ 0.00ft (Original Well Elev)  
Calculation Method: Minimum Curvature

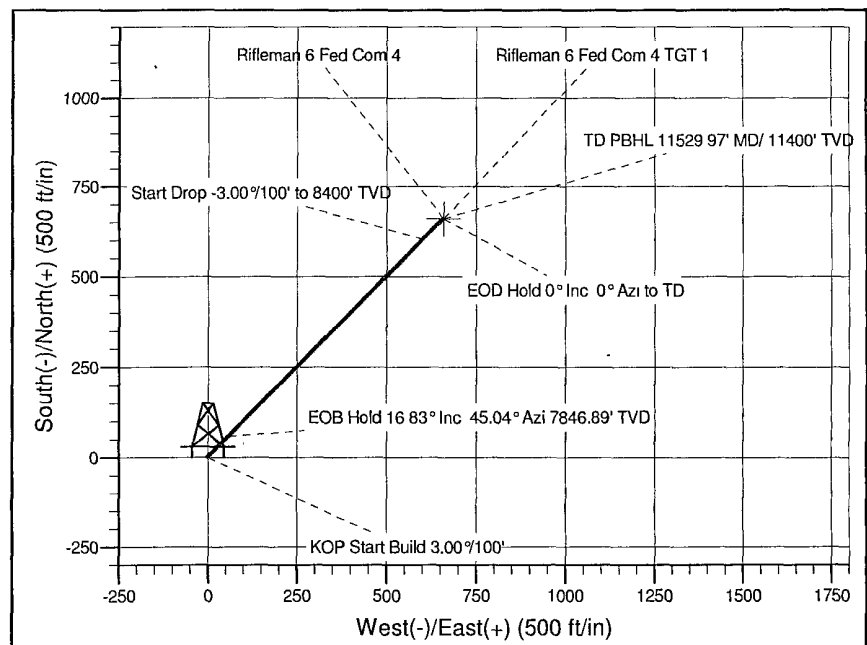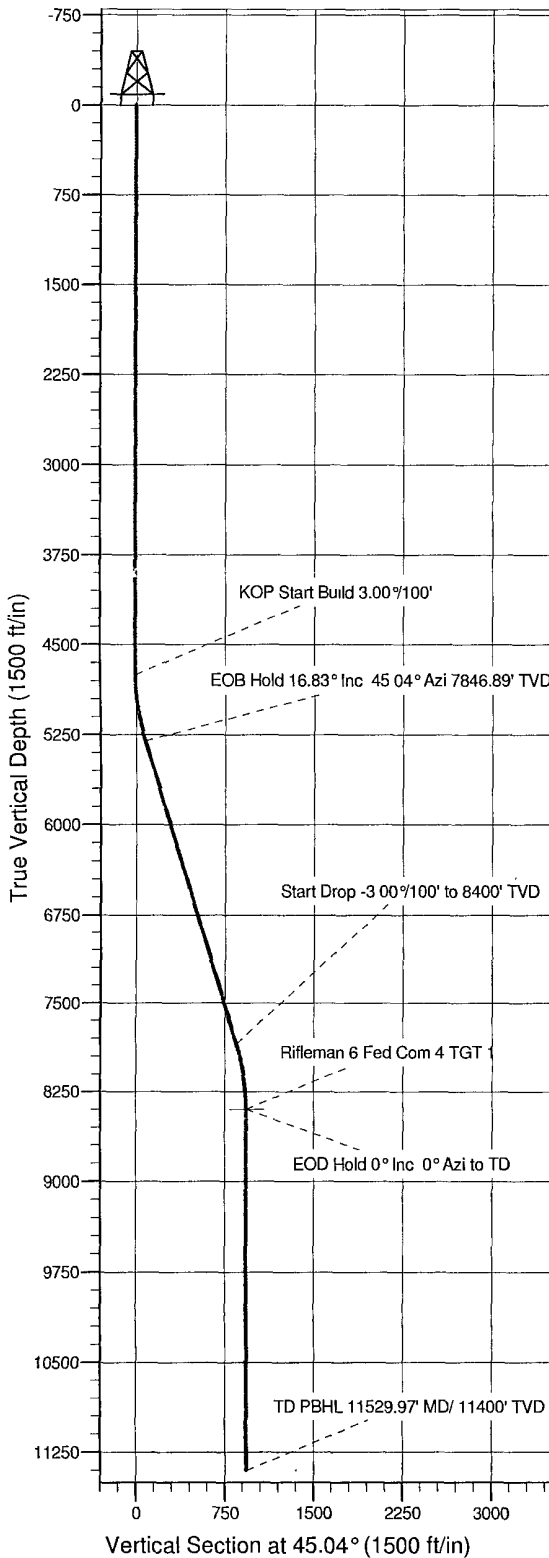

# **Devon Energy**

**Eddy County (NM27E)**

**Sec. 6-T22S-R26E**

**Rifleman 6 Fed Com 4**

**Wellbore #1**

**Plan: Plan #1**

## **Standard Planning Report**

**19 November, 2008**

# Quantum Planning Report

**Database:** EDM 2003.16 Single User Db  
**Company:** Devon Energy  
**Project:** Eddy County (NM27E)  
**Site:** Sec. 6-T22S-R26E  
**Well:** Rifleman 6 Fed Com 4  
**Wellbore:** Wellbore #1  
**Design:** Plan #1

**Local Co-ordinate Reference:**  
**TVD Reference:**  
**MD Reference:**  
**North Reference:**  
**Survey Calculation Method:**

**Well Rifleman 6 Fed Com 4**  
 WELL @ 0.00ft (Original Well Elev)  
 WELL @ 0.00ft (Original Well Elev)  
 True  
 Minimum Curvature

**Project** Eddy County (NM27E)

**Map System:** US State Plane 1927 (Exact solution)      **System Datum:** Mean Sea Level  
**Geo Datum:** NAD 1927 (NADCON CONUS)  
**Map Zone:** New Mexico East 3001

**Site** Sec. 6-T22S-R26E

**Site Position:**      **Northing:** ft      **Latitude:**  
**From:** None      **Easting:** ft      **Longitude:**  
**Position Uncertainty:** 0.00 ft      **Slot Radius:** "      **Grid Convergence:** 0.00 °

**Well** Rifleman 6 Fed Com 4

**Well Position**      **+N/-S**      0.43 ft      **Northing:**      3,903.235 ft      **Latitude:**      31° 0' 3.700 N  
                          **+E/-W**      -0.43 ft      **Easting:**      4,015.962 ft      **Longitude:**      105° 54' 58.654 W  
**Position Uncertainty**      0.00 ft      **Wellhead Elevation:**      ft      **Ground Level:**      0.00 ft

**Wellbore** Wellbore #1

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	2008/11/19	8.77	58.66	47,894

**Design** Plan #1

**Audit Notes:**

**Version:**      **Phase:** PROTOTYPE      **Tie On Depth:** 0.00

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.43	-0.43	45.04

**Plan Sections**

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.43	-0.43	0.00	0.00	0.00	0.00	
4,750.00	0.00	0.00	4,750.00	0.43	-0.43	0.00	0.00	0.00	0.00	
5,311.15	16.83	45.04	5,303.11	58.27	57.48	3.00	3.00	0.00	45.04	
7,968.82	16.83	45.04	7,846.89	602.16	602.09	0.00	0.00	0.00	0.00	
8,529.97	0.00	0.00	8,400.00	660.00	660.00	3.00	-3.00	0.00	180.00	Rifleman 6 Fed Cor
11,529.97	0.00	0.00	11,400.00	660.00	660.00	0.00	0.00	0.00	0.00	

# Quantum Planning Report

<b>Database:</b>	EDM 2003.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Rifleman 6 Fed Com 4
<b>Company:</b>	Devon Energy	<b>TVD Reference:</b>	WELL @ 0.00ft (Original Well Elev)
<b>Project:</b>	Eddy County (NM27E)	<b>MD Reference:</b>	WELL @ 0.00ft (Original Well Elev)
<b>Site:</b>	Sec. 6-T22S-R26E	<b>North Reference:</b>	True
<b>Well:</b>	Rifleman 6 Fed Com 4	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Plan #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.43	-0.43	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.43	-0.43	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.43	-0.43	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.43	-0.43	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.43	-0.43	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.43	-0.43	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.43	-0.43	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.43	-0.43	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.43	-0.43	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.43	-0.43	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.43	-0.43	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.43	-0.43	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.43	-0.43	0.00	0.00	0.00	0.00
4,750.00	0.00	0.00	4,750.00	0.43	-0.43	0.00	0.00	0.00	0.00
<b>KOP Start Build 3.00°/100'</b>									
4,800.00	1.50	45.04	4,799.99	0.89	0.03	0.65	3.00	3.00	0.00
4,900.00	4.50	45.04	4,899.85	4.59	3.73	5.89	3.00	3.00	0.00
5,000.00	7.50	45.04	4,999.29	11.98	11.13	16.34	3.00	3.00	0.00

# Quantum Planning Report

<b>Database:</b>	EDM 2003.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Rifleman 6 Fed Com 4
<b>Company:</b>	Devon Energy	<b>TVD Reference:</b>	WELL @ 0.00ft (Original Well Elev)
<b>Project:</b>	Eddy County (NM27E)	<b>MD Reference:</b>	WELL @ 0.00ft (Original Well Elev)
<b>Site:</b>	Sec. 6-T22S-R26E	<b>North Reference:</b>	True
<b>Well:</b>	Rifleman 6 Fed Com 4	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Plan #1		

Planned Survey										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	
5,100.00	10.50	45.04	5,098.04	23.03	22.20	31.98	3.00	3.00	0.00	
5,200.00	13.50	45.04	5,195.85	37.72	36.91	52.77	3.00	3.00	0.00	
5,300.00	16.50	45.04	5,292.43	56.01	55.22	78.65	3.00	3.00	0.00	
5,311.15	16.83	45.04	5,303.11	58.27	57.48	81.85	3.00	3.00	0.00	
<b>EOB Hold 16.83° Inc 45.04° Azi 7846.89' TVD</b>										
5,400.00	16.83	45.04	5,388.15	76.45	75.69	107.58	0.00	0.00	0.00	
5,500.00	16.83	45.04	5,483.87	96.92	96.18	136.54	0.00	0.00	0.00	
5,600.00	16.83	45.04	5,579.58	117.38	116.67	165.50	0.00	0.00	0.00	
5,700.00	16.83	45.04	5,675.30	137.85	137.16	194.46	0.00	0.00	0.00	
5,800.00	16.83	45.04	5,771.01	158.31	157.65	223.42	0.00	0.00	0.00	
5,900.00	16.83	45.04	5,866.73	178.78	178.15	252.38	0.00	0.00	0.00	
6,000.00	16.83	45.04	5,962.44	199.24	198.64	281.34	0.00	0.00	0.00	
6,100.00	16.83	45.04	6,058.15	219.71	219.13	310.31	0.00	0.00	0.00	
6,200.00	16.83	45.04	6,153.87	240.17	239.62	339.27	0.00	0.00	0.00	
6,300.00	16.83	45.04	6,249.58	260.64	260.11	368.23	0.00	0.00	0.00	
6,400.00	16.83	45.04	6,345.30	281.10	280.61	397.19	0.00	0.00	0.00	
6,500.00	16.83	45.04	6,441.01	301.57	301.10	426.15	0.00	0.00	0.00	
6,600.00	16.83	45.04	6,536.73	322.03	321.59	455.11	0.00	0.00	0.00	
6,700.00	16.83	45.04	6,632.44	342.50	342.08	484.07	0.00	0.00	0.00	
6,800.00	16.83	45.04	6,728.16	362.96	362.57	513.03	0.00	0.00	0.00	
6,900.00	16.83	45.04	6,823.87	383.43	383.07	541.99	0.00	0.00	0.00	
7,000.00	16.83	45.04	6,919.58	403.89	403.56	570.95	0.00	0.00	0.00	
7,100.00	16.83	45.04	7,015.30	424.36	424.05	599.91	0.00	0.00	0.00	
7,200.00	16.83	45.04	7,111.01	444.82	444.54	628.88	0.00	0.00	0.00	
7,300.00	16.83	45.04	7,206.73	465.29	465.03	657.84	0.00	0.00	0.00	
7,400.00	16.83	45.04	7,302.44	485.75	485.53	686.80	0.00	0.00	0.00	
7,500.00	16.83	45.04	7,398.16	506.22	506.02	715.76	0.00	0.00	0.00	
7,600.00	16.83	45.04	7,493.87	526.68	526.51	744.72	0.00	0.00	0.00	
7,700.00	16.83	45.04	7,589.59	547.15	547.00	773.68	0.00	0.00	0.00	
7,800.00	16.83	45.04	7,685.30	567.61	567.49	802.64	0.00	0.00	0.00	
7,900.00	16.83	45.04	7,781.02	588.08	587.98	831.60	0.00	0.00	0.00	
7,968.82	16.83	45.04	7,846.89	602.16	602.09	851.53	0.00	0.00	0.00	
<b>Start Drop -3.00°/100' to 8400' TVD</b>										
8,000.00	15.90	45.04	7,876.80	608.37	608.30	860.32	3.00	-3.00	0.00	
8,100.00	12.90	45.04	7,973.65	625.94	625.90	885.18	3.00	-3.00	0.00	
8,200.00	9.90	45.04	8,071.67	639.91	639.88	904.95	3.00	-3.00	0.00	
8,300.00	6.90	45.04	8,170.58	650.23	650.21	919.55	3.00	-3.00	0.00	
8,400.00	3.90	45.04	8,270.13	656.88	656.87	928.96	3.00	-3.00	0.00	
8,500.00	0.90	45.04	8,370.03	659.83	659.83	933.15	3.00	-3.00	0.00	
8,529.97	0.00	0.00	8,400.00	660.00	660.00	933.38	3.00	-3.00	0.00	
<b>EOD Hold 0° Inc 0° Azi to TD - Rifleman 6 Fed Com 4 TGT 1</b>										
8,600.00	0.00	0.00	8,470.03	660.00	660.00	933.38	0.00	0.00	0.00	
8,700.00	0.00	0.00	8,570.03	660.00	660.00	933.38	0.00	0.00	0.00	
8,800.00	0.00	0.00	8,670.03	660.00	660.00	933.38	0.00	0.00	0.00	
8,900.00	0.00	0.00	8,770.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,000.00	0.00	0.00	8,870.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,100.00	0.00	0.00	8,970.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,200.00	0.00	0.00	9,070.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,300.00	0.00	0.00	9,170.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,400.00	0.00	0.00	9,270.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,500.00	0.00	0.00	9,370.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,600.00	0.00	0.00	9,470.03	660.00	660.00	933.38	0.00	0.00	0.00	
9,700.00	0.00	0.00	9,570.03	660.00	660.00	933.38	0.00	0.00	0.00	

# Quantum Planning Report

<b>Database:</b>	EDM 2003.16 Single User Db	<b>Local Co-ordinate Reference:</b>	Well Rifleman 6 Fed Com 4
<b>Company:</b>	Devon Energy	<b>TVD Reference:</b>	WELL @ 0.00ft (Original Well Elev)
<b>Project:</b>	Eddy County (NM27E)	<b>MD Reference:</b>	WELL @ 0.00ft (Original Well Elev)
<b>Site:</b>	Sec. 6-T22S-R26E	<b>North Reference:</b>	True
<b>Well:</b>	Rifleman 6 Fed Com 4	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	Wellbore #1		
<b>Design:</b>	Plan #1		

## Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
9,800.00	0.00	0.00	9,670.03	660.00	660.00	933.38	0.00	0.00	0.00
9,900.00	0.00	0.00	9,770.03	660.00	660.00	933.38	0.00	0.00	0.00
10,000.00	0.00	0.00	9,870.03	660.00	660.00	933.38	0.00	0.00	0.00
10,100.00	0.00	0.00	9,970.03	660.00	660.00	933.38	0.00	0.00	0.00
10,200.00	0.00	0.00	10,070.03	660.00	660.00	933.38	0.00	0.00	0.00
10,300.00	0.00	0.00	10,170.03	660.00	660.00	933.38	0.00	0.00	0.00
10,400.00	0.00	0.00	10,270.03	660.00	660.00	933.38	0.00	0.00	0.00
10,500.00	0.00	0.00	10,370.03	660.00	660.00	933.38	0.00	0.00	0.00
10,600.00	0.00	0.00	10,470.03	660.00	660.00	933.38	0.00	0.00	0.00
10,700.00	0.00	0.00	10,570.03	660.00	660.00	933.38	0.00	0.00	0.00
10,800.00	0.00	0.00	10,670.03	660.00	660.00	933.38	0.00	0.00	0.00
10,900.00	0.00	0.00	10,770.03	660.00	660.00	933.38	0.00	0.00	0.00
11,000.00	0.00	0.00	10,870.03	660.00	660.00	933.38	0.00	0.00	0.00
11,100.00	0.00	0.00	10,970.03	660.00	660.00	933.38	0.00	0.00	0.00
11,200.00	0.00	0.00	11,070.03	660.00	660.00	933.38	0.00	0.00	0.00
11,300.00	0.00	0.00	11,170.03	660.00	660.00	933.38	0.00	0.00	0.00
11,400.00	0.00	0.00	11,270.03	660.00	660.00	933.38	0.00	0.00	0.00
11,500.00	0.00	0.00	11,370.03	660.00	660.00	933.38	0.00	0.00	0.00
11,529.97	0.00	0.00	11,400.00	660.00	660.00	933.38	0.00	0.00	0.00
TD PBHL 11529.97' MD/ 11400' TVD									


## Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
- hit/miss target									
- Shape									
Rifleman 6 Fed Com	0.00	0.00	8,400.00	660.00	660.00	4,553.336	4,685.715	31° 0' 10 227 N	105° 54' 51.067 W
- plan hits target									
- Point									


## Plan Annotations

Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
4,750.00	4,750.00	0.43	-0.43	KOP Start Build 3.00°/100'
5,311.15	5,303.11	58.27	57.48	EOB Hold 16.83° Inc 45.04° Azi 7846.89' TVD
7,968.82	7,846.89	602.16	602.09	Start Drop -3.00°/100' to 8400' TVD
8,529.97	8,400.00	660.00	660.00	EOD Hold 0° Inc 0° Azi to TD
11,529.97	11,400.00	660.00	660.00	TD PBHL 11529.97' MD/ 11400' TVD




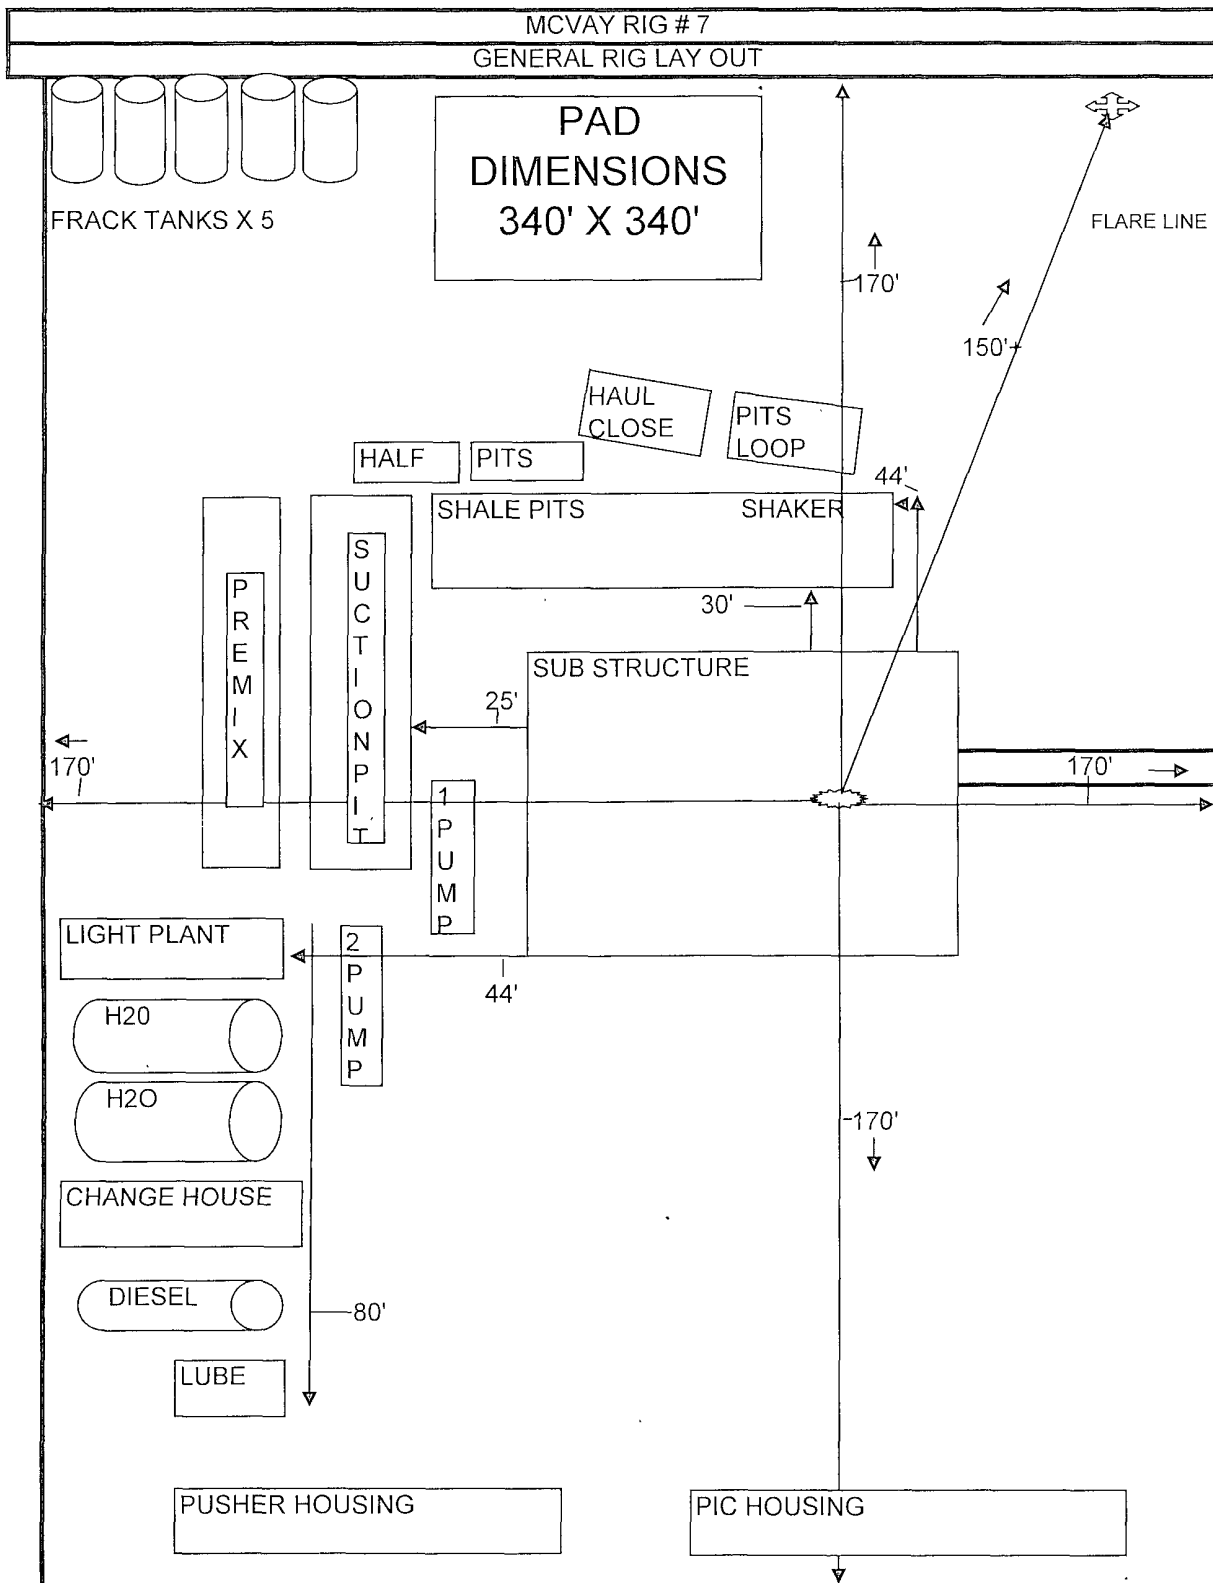


# 13-5/8" 3K Annular

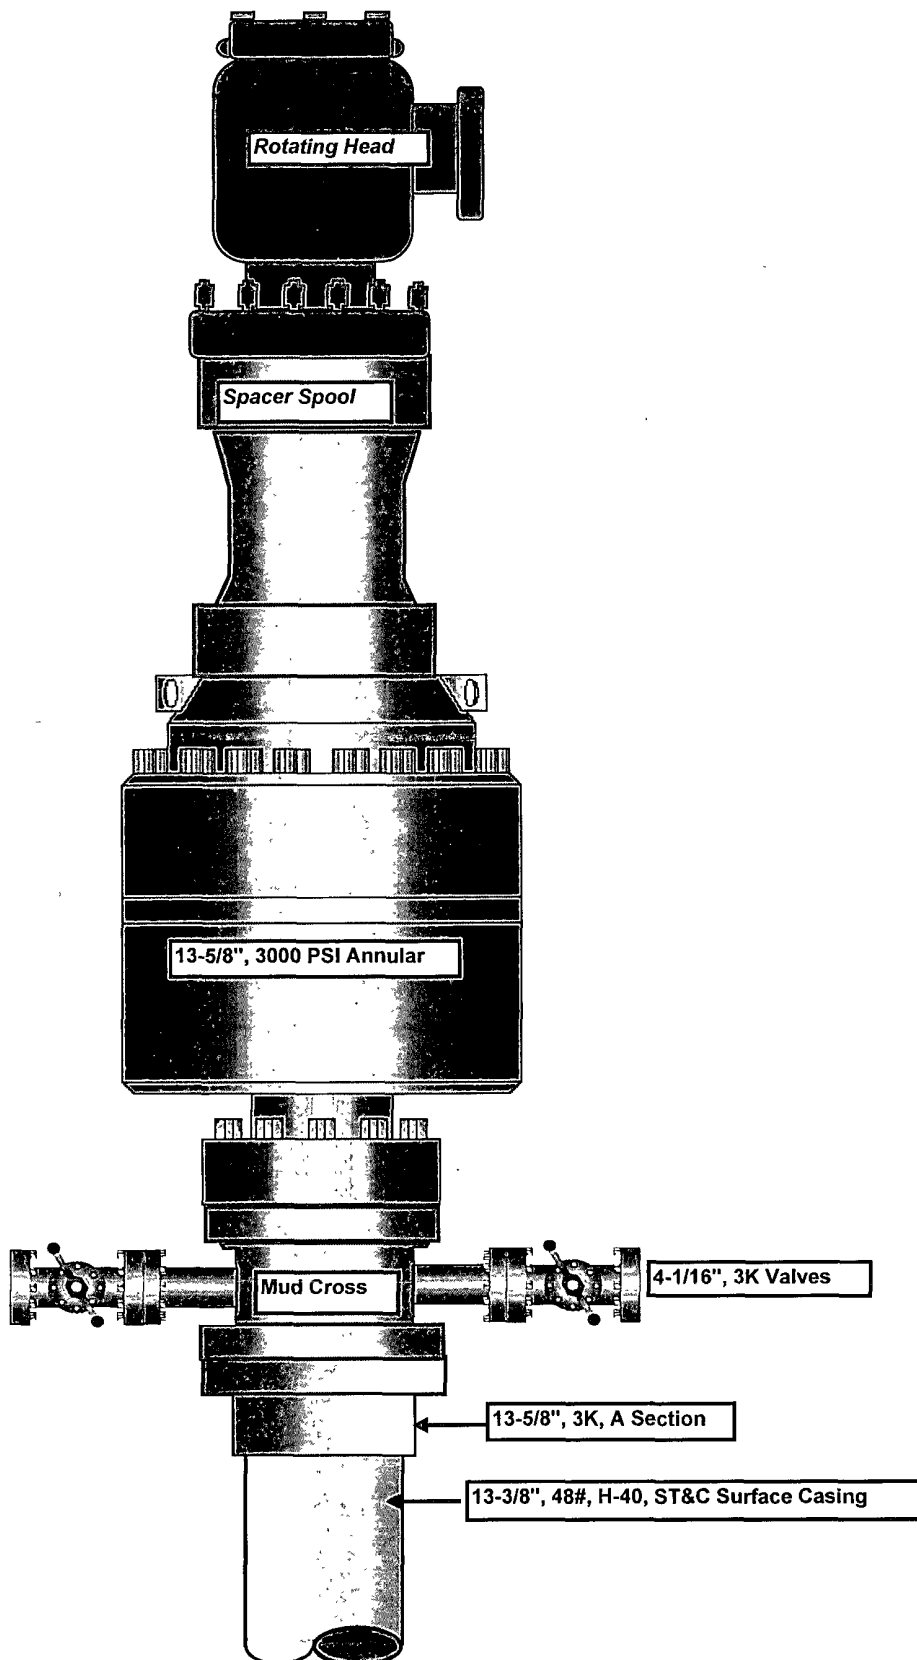

# 13-5/8" x 5,000 psi BOP Stack

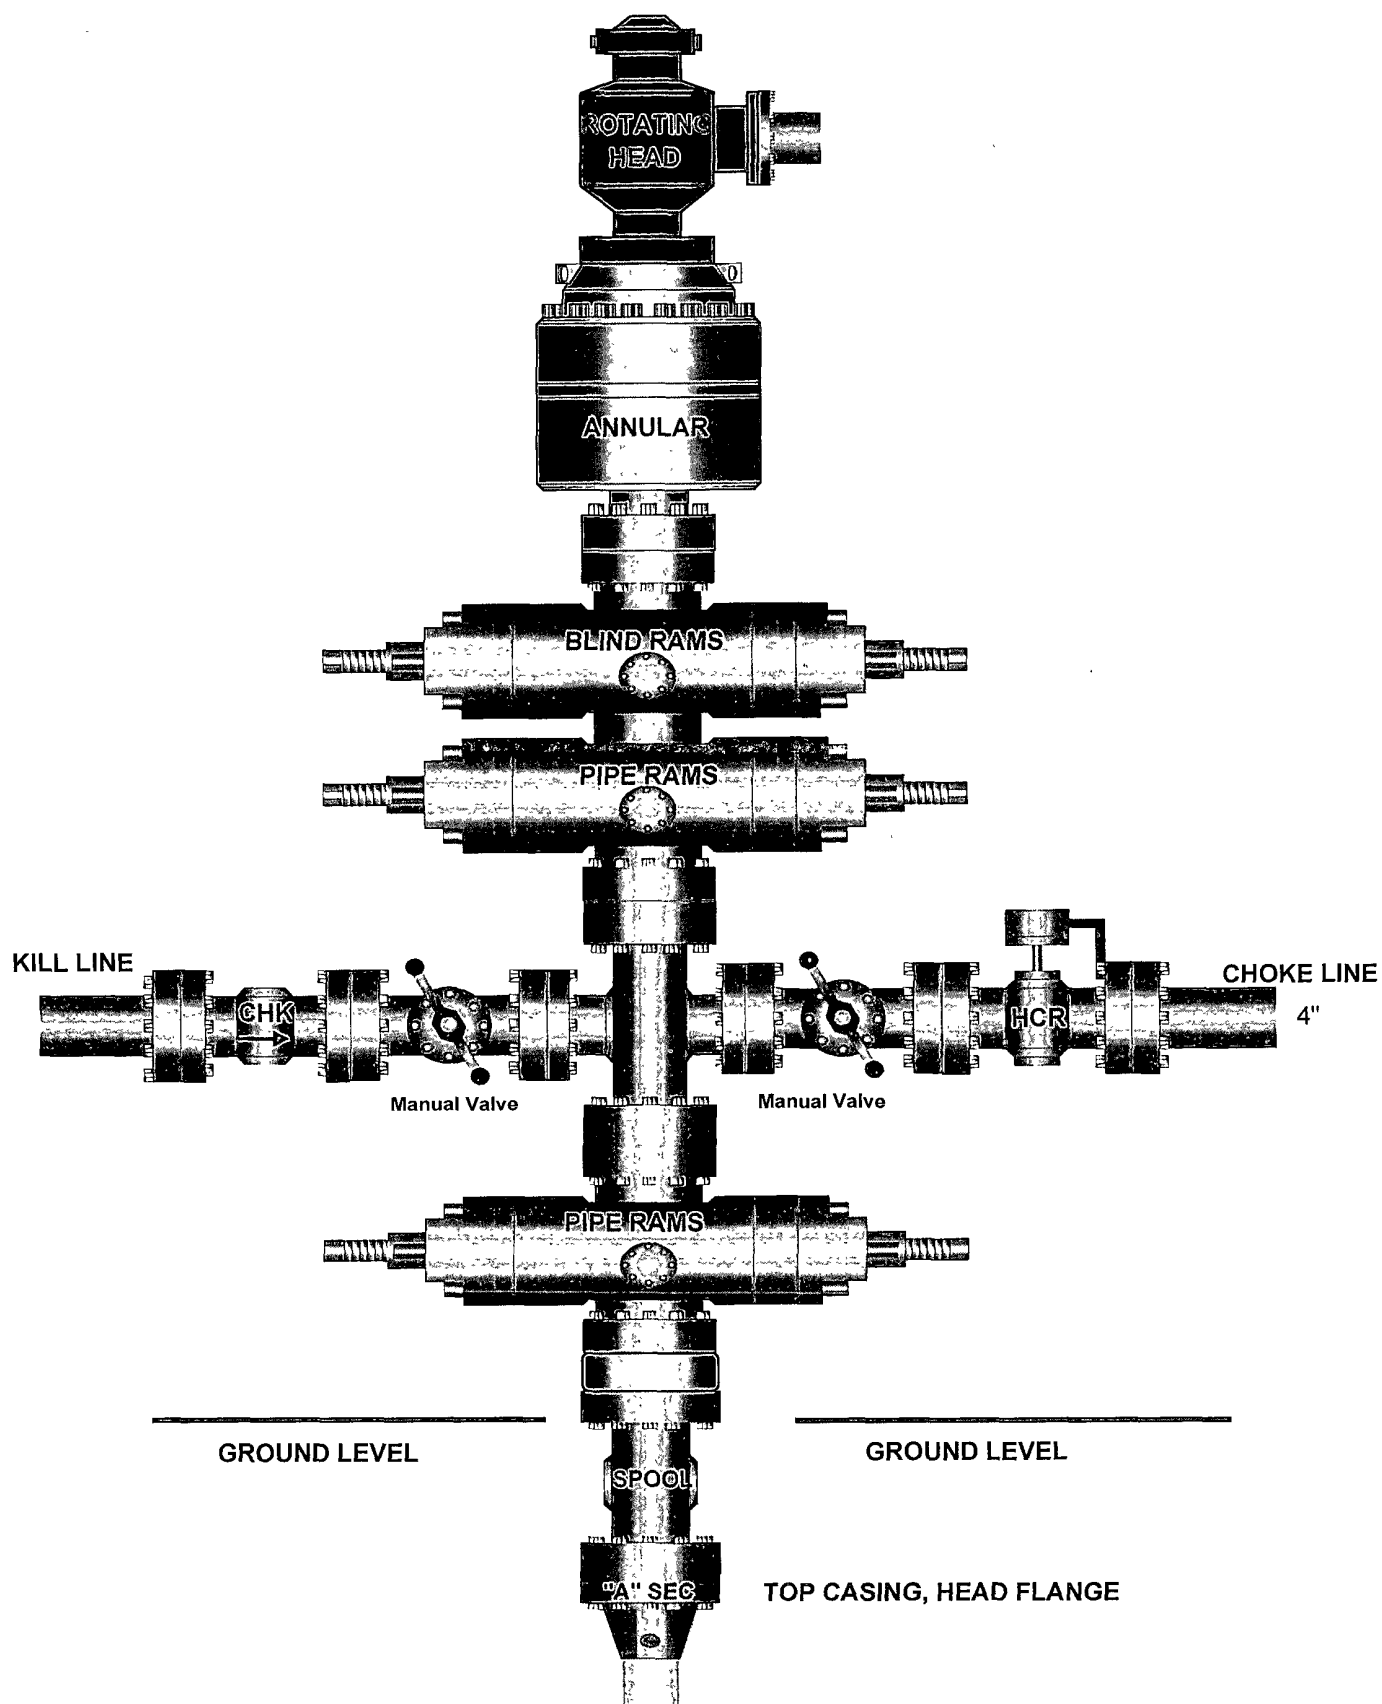

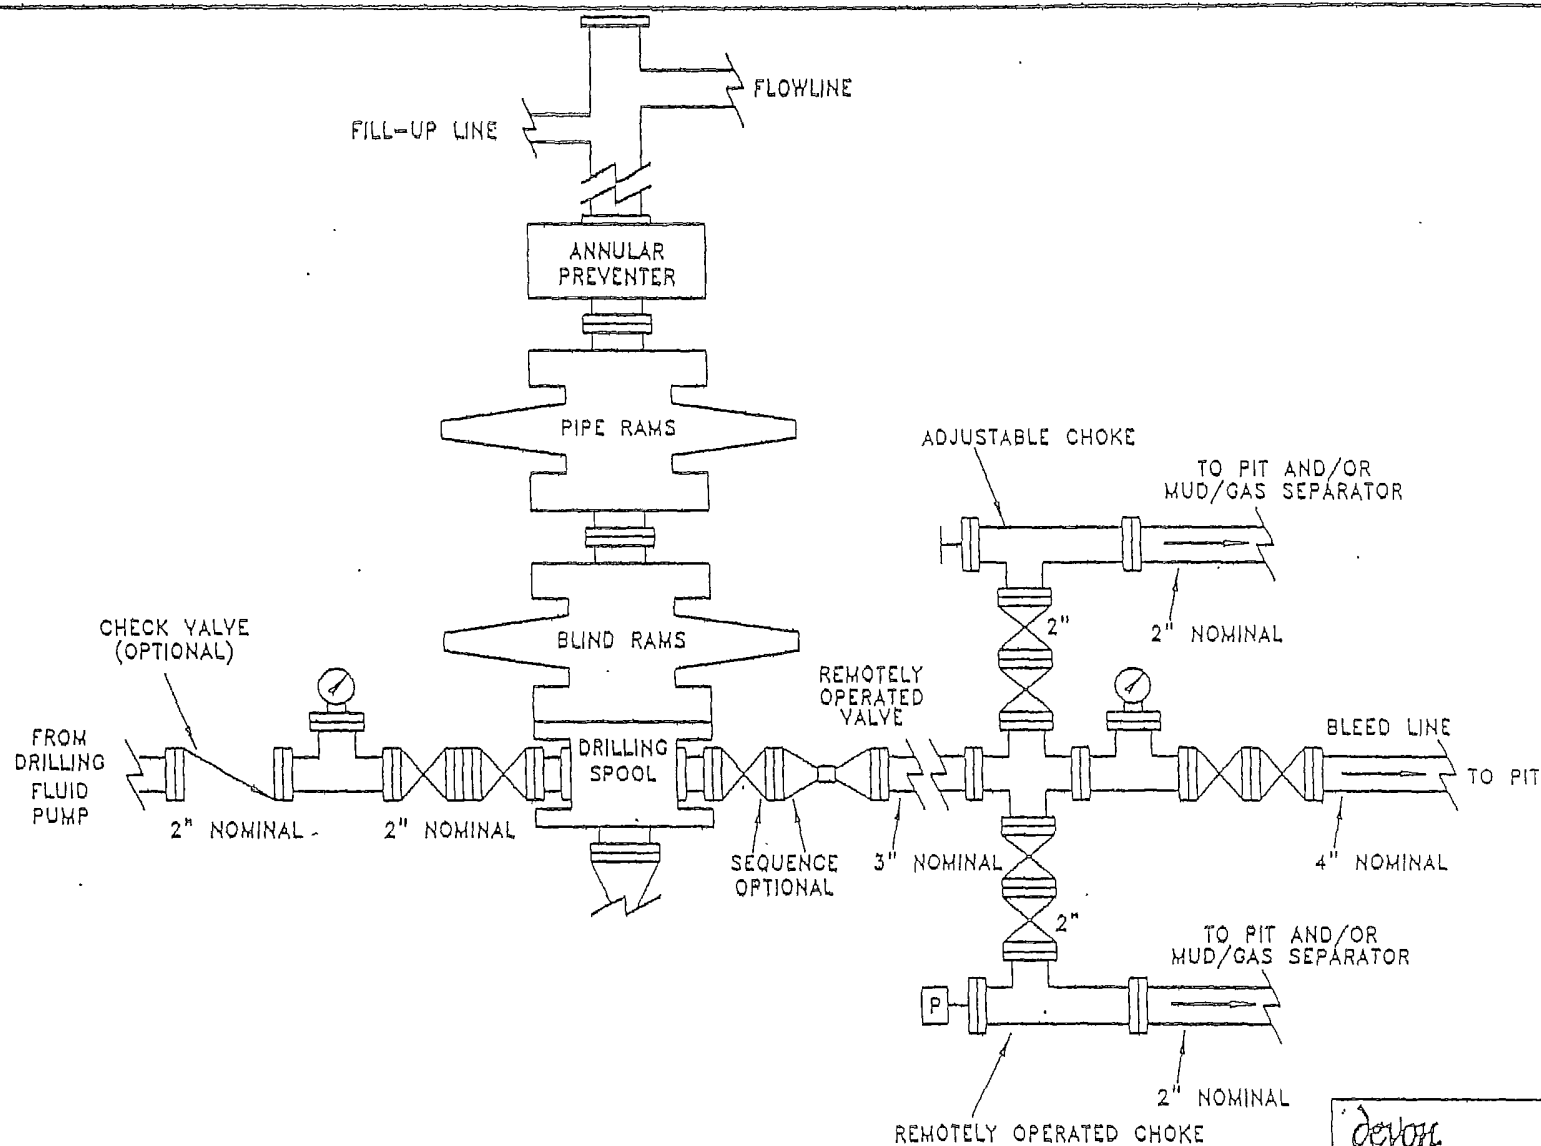

devon

EXHIBIT 1

PROPOSED 5-M BOPE  
AND CHOKE ARRANGEMENT


sl\..nm\plots  
5mbope.dwg

SC

MINIMUM CHOKE MANIFOLD  
3,000, 5,000 and 10,000 PSI Working Pressure

3 MWP - 5 MWP - 10 MWP

Exhibit E

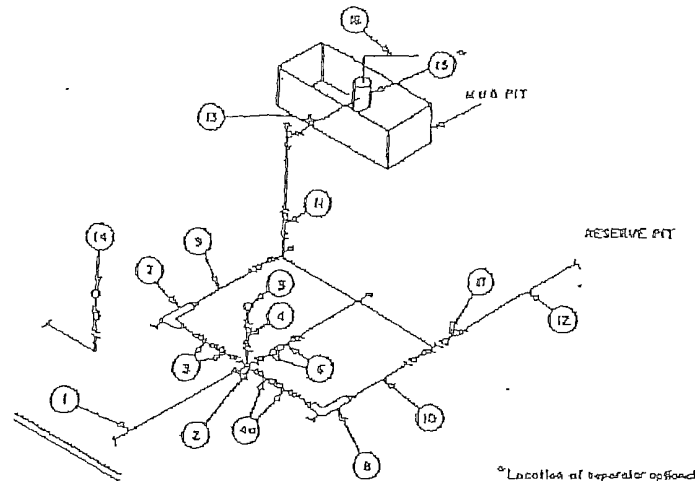

BEYOND SUBSTRUCTURE

No.		MINIMUM REQUIREMENTS								
		3,000 MWP			5,000 MWP			10,000 MWP		
		I.D.	NOMINAL	RATING	I.D.	NOMINAL	RATING	I.D.	NOMINAL	RATING
1	Line from drilling spool		3"	3,000		3"	5,000		3"	10,000
2	Cross 3"x3"x3"x2"			3,000			5,000			10,000
	Cross 3"x3"x3"x3"									10,000
3	Valves (1) Gate <input type="checkbox"/> Plug <input type="checkbox"/> (2)	3-1/8"		3,000	3-1/8"		5,000	3-1/8"		10,000
4	Valve Gate <input type="checkbox"/> Plug <input type="checkbox"/> (2)	1-13/16"		3,000	1-13/16"		5,000	1-13/16"		10,000
4a	Valves (1)	2-1/16"		3,000	2-1/16"		5,000	3-1/8"		10,000
5	Pressure Gauge			3,000			5,000			10,000
6	Valves Gate <input type="checkbox"/> Plug <input type="checkbox"/> (2)	3-1/8"		3,000	3-1/8"		5,000	3-1/8"		10,000
7	Adjustable Choke (3)	2"		3,000	2"		5,000	2"		10,000
8	Adjustable Choke	1"		3,000	1"		5,000	2"		10,000
9	Line		3"	3,000		3"	5,000		3"	10,000
10	Line		2"	3,000		2"	5,000		3"	10,000
11	Valves Gate <input type="checkbox"/> Plug <input type="checkbox"/> (2)	3-1/8"		3,000	3-1/8"		5,000	3-1/8"		10,000
12	Lines		3"	1,000		3"	1,000		3"	2,000
13	Lines		3"	1,000		3"	1,000		3"	2,000
14	Remote reading compound standpipe pressure gauge			3,000			5,000			10,000
15	Gas Separator		2"x5"			2"x5"			2"x5"	
16	Line		4"	1,000		4"	1,000		4"	2,000
17	Valves Gate <input type="checkbox"/> Plug <input type="checkbox"/> (2)	3-1/8"		3,000	3-1/8"		5,000	3-1/8"		10,000

(1) Only one required in Class JM.

(2) Gate valves only shall be used for Class 10M.

(3) Remote operated hydraulic chokes required on 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTIONS

1. All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
2. All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or BX. Use only BX for 10 MWP.
3. All lines shall be securely anchored.
4. Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
5. Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an alternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
6. Line from drilling spool to choke manifold should be as straight as possible. Lines downstream from chokes shall make turns by large bends or 90° bends using bull plugged tees.
7. Discharge lines from chokes, choke bypass and from top of gas separator should vent as far as practical from the well.

Attachment to Exhibit #1  
NOTES REGARDING BLOWOUT PREVENTERS  
Devon Energy Production Company, LP  
**Rifleman 6 Fed Com 4H**

Surface Location: 1320' FSL & 1320' FWL, Unit N, Sec 6 T22S R26E, Eddy, NM  
Bottom hole Location: 1980' FSL & 1980' FWL, Unit K, Sec 6 T22S R26E, Eddy, NM

1. Drilling nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated fittings will be in operable condition to withstand a minimum 5000 psi working pressure.
4. All fittings will be flanged.
5. A full bore safety valve tested to a minimum 5000 psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.

## HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H<sub>2</sub>S safety instructor to the following:
  - a. Characteristics of H<sub>2</sub>S
  - b. Physical effects and hazards
  - c. Proper use of safety equipment and life support systems.
  - d. Principle and operation of H<sub>2</sub>S detectors, warning system and briefing areas
  - e. Evacuation procedures, routes and first aid.
  - f. Proper use of 30-minute pressure demand air pack.
2. H<sub>2</sub>S Detection and Alarm System
  - a. H<sub>2</sub>S detectors and audio alarm system to be located at bell nipple, end of blooie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
  - a. Windsock at mud pit area should be high enough to be visible
  - b. Windsock at briefing area should be high enough to be visible
  - c. There should be a windsock at entrance to location
4. Condition Flags and Signs
  - a. Warning Sign on access road to location
  - b. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H<sub>2</sub>S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well Control Equipment
  - a. See Exhibit "E" & "E-1"
6. Communication
  - a. While working under masks chalkboards will be used for communication.
  - b. Hand signals will be used where chalk board is inappropriate
  - c. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
7. Drill stem Testing
  - a. Exhausts will be watered
  - b. Flare line will be equipped with an electric igniter or a propane pilot light in case gas reaches the surface.
  - c. If the location is near to a dwelling a closed DST will be performed.
8. Drilling contractor supervisor will be required to be familiar with the effects H<sub>2</sub>S has on tubular goods and other mechanical equipment.

If H<sub>2</sub>S is encountered, mud system will be altered if necessary to maintain control or formation. A mud gas separator will be brought into service along with H<sub>2</sub>S scavengers if necessary.

## Emergency Procedures

In the case of a release of gas containing H<sub>2</sub>S, the first responder(s) must isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

All responders must have training in the detection of H<sub>2</sub>S, measures for protection against the gas, equipment used for protection and emergency response. Additionally, responders must be equipped with H<sub>2</sub>S monitors and air packs in order to control the release. Use the “buddy system” to ensure no injuries during the response.

## Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

## Characteristics of H<sub>2</sub>S and SO<sub>2</sub>

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H <sub>2</sub> S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO <sub>2</sub>	2.21 Air = 1	2 ppm	N/A	1000 ppm

## Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico’s ‘Hazardous Materials Emergency Response Plan’ (HMER)



## Devon Energy Corp. Company Call List

<u>Artesia (575)</u>	<u>Cellular</u>	<u>Office</u>	<u>Home</u>
Foreman – BJ Cathey.....	390-5893 .....	748-0176 .....	887-6026
Asst. Foreman – Bobby Jones...	748-7447 .....	748-0176 .....	746-3194
Don Mayberry .....	748-7180 .....	748-5235 .....	746-4945
Montral Walker .....	(575) 390-5182 .....	(575) 748-0193	
Linda Berryman .....	(575) 513-0534 .....	(575) 748-0177	

### Agency Call List

<u>Lea</u>	<u>Hobbs</u>
<u>County</u>	State Police..... 392-5588
<u>(505)</u>	City Police..... 397-9265
	Sheriff's Office..... 393-2515
	Ambulance..... 911
	Fire Department ..... 397-9308
	LEPC (Local Emergency Planning Committee)..... 393-2870
	NMOCD..... 393-6161
	US Bureau of Land Management..... 393-3612

<u>Eddy</u>	<u>Carlsbad</u>
<u>County</u>	State Police ..... 885-3137
<u>(505)</u>	City Police ..... 885-2111
	Sheriff's Office ..... 887-7551
	Ambulance..... 911
	Fire Department..... 885-2111
	LEPC (Local Emergency Planning Committee)..... 887-3798
	US Bureau of Land Management ..... 887-6544
	New Mexico Emergency Response Commission (Santa Fe).... (575) 476-9600
	24 HR ..... (575) 827-9126
	National Emergency Response Center (Washington, DC) ..... (800) 424-8802

### Emergency Services

	Boots & Coots IWC ..... 1-800-256-9688 or (281) 931-8884
	Cudd Pressure Control..... (915) 699-0139 or (915) 563-3356
	Halliburton ..... (575) 746-2757
	B. J. Services..... (575) 746-3569
<i>Give</i>	Flight For Life - Lubbock, TX ..... (806) 743-9911
<i>GPS</i>	Aerocare - Lubbock, TX ..... (806) 747-8923
<i>position:</i>	Med Flight Air Amb - Albuquerque, NM ..... (575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM ..... (575) 272-3115

## **SURFACE USE PLAN**

Devon Energy Production Company, LP

### **Rifleman 6 Fed Com 4H**

Surface Location: 1320' FSL & 1320' FWL, Unit N, Sec 6 T22S R26E, Eddy, NM

Bottom hole Location: 1980' FSL & 1980' FWL, Unit K, Sec 6 T22S R26E, Eddy, NM

#### **1. Existing Roads:**

- a. The well site and elevation plat for the proposed well are reflected on the well site layout; Form C-102. The well was staked by Basin Surveys.
- b. All roads into the location are depicted on Exhibit 3.
- c. Directions to Location: From the junction of county Rd Jones and Co. Rd Bitter Cherry, go west 1.6 miles to 2-track, on 2-track go north 0.3 miles to proposed location.

#### **2. New or Reconstructed Access Roads:**

- a. The well site layout, Form C-102 shows the existing County Road. Approximately 1770' of new access road will be constructed as follows:
- b. The maximum width of the road will be 15'. It will be crowned and made of 6" of rolled and compacted caliche. Water will be deflected, as necessary, to avoid accumulation and prevent surface erosion.
- c. Surface material will be native caliche. This material will be obtained from a BLM approved pit nearest in proximity to the location. The average grade will be approximately 1%.
- d. No cattle guards, grates or fence cuts will be required. No turnouts are planned.

#### **3. Location of Existing Wells:**

1 Mile Radius Plat shows all existing and proposed wells within a one-mile radius of the proposed location. See attached plat.

#### **4. Location of Existing and/or Proposed Production Facilities:**

- a. In the event the well is found productive, the Pacheco 31 Fed Com 9 tank battery would be utilized and the necessary production equipment will be installed at the well site. See Production Facilities Layout diagram.
- b. If necessary, the well will be operated by means of an electric prime mover. Electric power poles will be set along side of the access road.
- c. All flow lines will adhere to API standards.
- d. If the well is productive, rehabilitation plans are as follows:
  - i. The reserve pit will be back-filled after the contents of the pit are dry (within 120 days after completion, weather permitting).
  - ii. The original topsoil from the well site will be returned to the location. The drill site will then be contoured as close as possible to the original state.

**5. Location and Types of Water Supply:**

This location will be drilled using a combination of water mud systems (outlined in the Drilling Program). The water will be obtained from commercial water stations in the area and hauled to location by transport truck using the existing and proposed roads shown in the C-102. On occasion, water will be obtained from a pre-existing water well, running a pump directly to the drill rig. In these cases where a poly pipeline is used to transport water for drilling purposes, proper authorizations will be secured. If a poly pipeline is used, the size, distance, and map showing route will be provided to the BLM via sundry notice.

**6. Construction Materials:**

All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM approved pit or from prevailing deposits found under the location. All roads will be constructed of 6" rolled and compacted caliche. Will use BLM recommended use of extra caliche from other locations close by for roads, if available.

**7. Methods of Handling Waste Material:**

- a. Drill cuttings will be disposed of in the reserve pits.
- b. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in an approved sanitary landfill.
- c. The supplier, including broken sacks, will pick up salts remaining after completion of well.
- d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- e. Remaining drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry enough to be broken out for further drying. If the drilling fluids do not evaporate in a reasonable time they will be hauled off by transports to a state approved disposal site. Later pits will be broken out to speed dry. Water produced during completion will be put in reserve pits. Oil and condensate produced will be put in a storage tank and sold.
- f. Disposal of fluids to be transported by the following companies:
  - i. American Production Service Inc, Odessa TX
  - ii. Gandy Corporation, Lovington NM
  - iii. I & W Inc, Loco Hill NM
  - iv. Jims Water Service of Co Inc, Denver CO

**8. Ancillary Facilities:** No campsite or other facilities will be constructed as a result of this well.

**9. Well Site Layout**

- a. Exhibit D shows the proposed well site layout with dimensions of the pad layout.
- b. This exhibit indicated proposed location of reserve and sump pits and living facilities.
- c. Mud pits in the active circulating system will be steel pits & the reserve pit will be lined.
- d. If needed, the reserve pit is to be lined with polyethylene. The pit liner will be 6 mils thick. Pit liner will extend a minimum 2'00" over the reserve pits dikes where the liner will be anchored down.

- e. The reserve pit will be fenced on three sides with four strands of barbed wire during drilling and completion phases. The fourth side will be fenced after all drilling operations have ceased to preclude endangering wildlife.
- f. If a pit or closed loop system is utilized Devon will comply with the NMOCD requirements 19.15.17 and submit form C-144 to the appropriate NMOCD District Office. Copy to be provided to the BLM; processing and approval by the OCD.

**10. Plans for Surface Reclamation:**

- a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The reserve pit area will be broken out and leveled after drying to a condition where these efforts are feasible. The original top soil will again be returned to the pad and contoured, as close as possible, to the original topography. Will close the pits per OCD compliance regulations.
- b. The pit lining will be buried or hauled away in order to return the location and road to their pristine nature. All pits will be filled and location leveled, weather permitting, within 120 days after abandonment.
- c. The location and road will be rehabilitated as recommended by the BLM.
- d. If the well is a producer, the reserve pit fence will be torn down after the pit contents have dried. The reserve pit and those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.
- e. If the well is deemed commercially productive, the reserve pit will be restored as described in 10(A) within 120 days subsequent to the completion date. Caliche from areas of the pad site not required for operations will be reclaimed. The original top soil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography.

**11. Surface Ownership**

- a. The surface is owned by the US Government and is administered by the Bureau of Land Management. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas.
- b. The proposed road routes and the surface location will be restored as directed by the BLM.

**12. Other Information:**


- a. The area surrounding the well site is grassland. The topsoil is very sandy in nature. The vegetation is moderately sparse with native prairie grass, sagebush, yucca and miscellaneous weeds. No wildlife was observed but it is likely that deer, rabbits, coyotes, and rodents traverse the area.
- b. There is no permanent or live water in the general proximity of the location.
- c. There are no dwellings within 2 miles of location.
- d. A Cultural Resources Examination will be completed by Southern New Mexico Archaeological Services, Inc. and forwarded to the BLM office in Carlsbad, New Mexico.

**13. Bond Coverage:**

Bond Coverage is Nationwide; Bond # is CO-1104

DEVON ENERGY PRODUCTION COMPANY LP

General Production Facilities Diagram

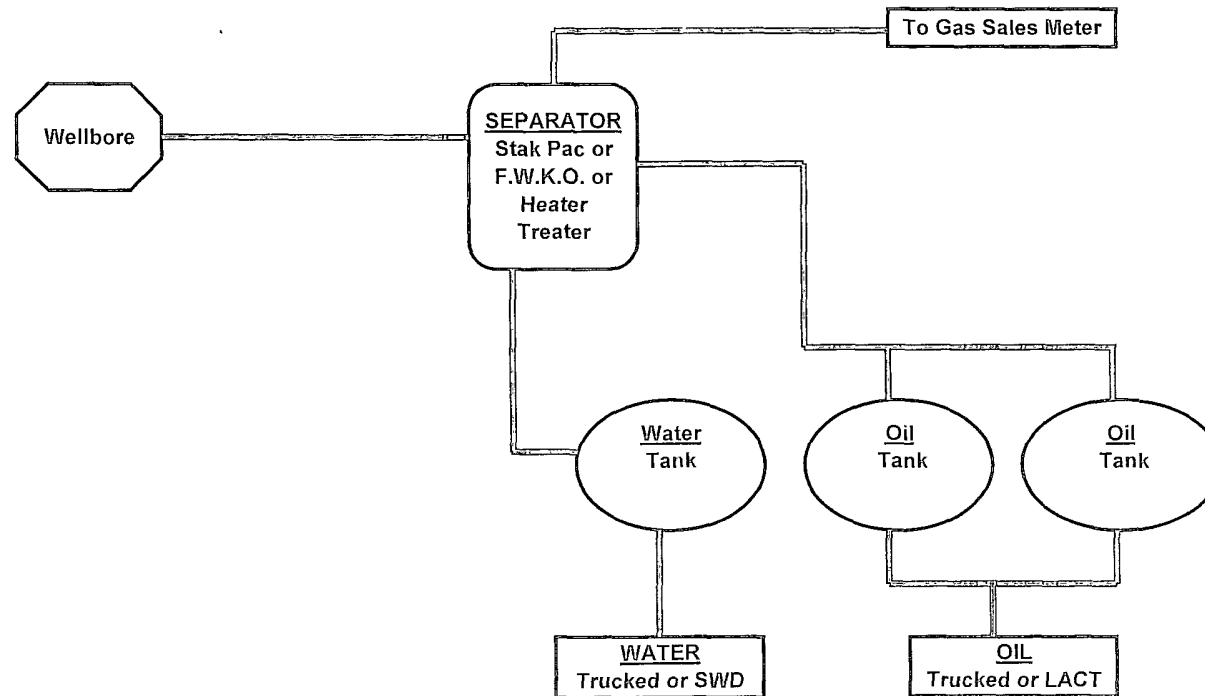

**Operators Representative:**

The Devon Energy Production Company, L.P. representatives responsible for ensuring compliance of the surface use plan are listed below.

Greg McGowen  
Operations Engineer Advisor

Don Mayberry  
Superintendent

Devon Energy Production Company, L.P.  
20 North Broadway, Suite 1500  
Oklahoma City, OK 73102-8260

Devon Energy Production Company, L.P.  
Post Office Box 250  
Artesia, NM 88211-0250

(405) 228-8965 (office)  
(405) 464-9769 (cell)

(505) 748-0164 (office)  
(505) 748-5235 (cell)


**Certification**

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or Devon Energy Production Company, L.P. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

I hereby also certify that I, or Devon Energy Production Company, L.P. have made a good faith effort to provide the surface owner with a copy of the Surface Use Plan of Operations and any Conditions of Approval that are attached to the APD.

Executed this 01st day of December, 2008.

Printed Name: Stephanie A. Ysasaga

Signed Name: 

Position Title: Sr. Staff Engineering Technician

Address: 20 North Broadway, OKC OK 73102

Telephone: (405) 552-7802

Field Representative (if not above signatory): Don Mayberry (see above)

Address (if different from above):

Telephone (if different from above):

E-mail (optional):

## PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Co. LP
LEASE NO.:	NM71752
WELL NAME & NO.:	Rifleman 6 Fed Com 4H
SURFACE HOLE FOOTAGE:	1320' FSL & 1320' FWL
BOTTOM HOLE FOOTAGE:	1980' FSL & 1980' FWL
LOCATION:	Section 6, T. 22 S., R 26 E., NMPM
COUNTY:	Eddy County, New Mexico

### TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
  - Cave/Karst
  - Interim Reclamation
  - Communitization agreement
  - Reporting
- ☒ **Construction**
  - Notification
  - Topsoil
  - Closed Loop System
  - Federal Mineral Material Pits
  - Well Pads
  - Roads
- ☒ **Road Section Diagram**
- ☒ **Drilling**
- ☐ **Production (Post Drilling)**
  - Well Structures & Facilities
  - Pipelines
  - Electric Lines
- ☒ **Closed Loop System/Interim Reclamation**
- ☐ **Final Abandonment/Reclamation**

## **I. GENERAL PROVISIONS**

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

## **II. PERMIT EXPIRATION**

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

## **III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES**

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

## **IV. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.



## **V. SPECIAL REQUIREMENT(S)**

**Rifleman 6 Fed. Com. # 4H:** Closed Loop System- V- Door Northeast

### **Interim Reclamation:**

The proposed location is located on the top of a ridge. In order to make the location less visible and to help prevent more erosion the northeast side of the well pad must be reclaimed during interim reclamation process. This will help reduce the overall surface disturbance and resource impacts, once the well has been drilled.

## **Cave and Karst**

**\*\*** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

### **Cave/Karst Surface Mitigation**

The following stipulations will be applied to minimize impacts during construction, drilling and production.

### **Construction:**

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

### **No Blasting:**

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

### **Pad Berming:**

The pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the pad.

### **Closed Mud System Using Steel Tanks with All Fluids and Cuttings Hauled Off.**

A closed mud system using steel tanks for all cuttings and fluids is required. All fluids and cuttings will be hauled off site for disposal. No pits are allowed.

### **Tank Battery Liners and Berms:**

Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

ADD COMPRESSOR STIP AS NEEDED IN CRITICAL OR HIGH CAVE KARST AREAS AND NOTIFY OPERATOR THAT IT WILL BE REQUIRED:

### **Compressor Liners and Containment:**

Gas compressors must have a leak containment system that will contain all leakage over an extended period of time. Containment systems should be leak proof both vertically

and horizontally, and include: the ability to visually monitor any leakage; the ability to siphon out any leakage or accumulated fluids; and appropriate bird and bat protection on all leak containment areas. When compressors are replaced: soils will be sampled to ensure the original containment was fully successful; any breach of original containment cleaned up down to clean soils; and new liners and/or containment systems installed prior to placement of the new compressor.

**Leak Detection System:**

A method of detecting leaks is required. The method could incorporate gauges to measure loss, siting valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

**Automatic Shut-off Systems:**

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

**Cave/Karst Subsurface Mitigation**

The following stipulations will be applied to protect cave/karst and ground water concerns:

**Rotary Drilling with Fresh Water:**

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

**Directional Drilling:**

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

**Fluorescent Dyes:**

Nontoxic Fluorescent dyes will be added to the drilling fluid when the hole is spudded and will be circulated to the bottom of the karst layers. BLM must witness the dye being injected.

**Florescene Dye (Eosin Y Orange):**

Thirty-two (32) ounces dry powder Orange (Eosin Y) Florescene dye will be added to the drilling fluid before the well is spudded AND to the pre-flush fluids of the surface and/or intermediate interval of casing down to the base of the Capitan Massif.

These dyes will track the fluids if lost circulation occurs.

Arrangements will be made to have BLM witness the dye being injected prior to spudding the hole and before the pre-flush of the surface casing. Contact the BLM drilling on call phone at (575) 361-2822 to make arrangements.

**Lost Circulation:**

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

**Abandonment Cementing:**

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

**Pressure Testing:**

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

**Communitization Agreement**

**A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales.**

**Reporting**

- 1. Subsequent sundries to be filed with drilling details about spud, casing and completion work.**
- 2. Completion report to be sent within 30 days of completion. Completion report to have all items completed.**

## **VI. CONSTRUCTION**

### **A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

### **B. TOPSOIL**

The operator shall stockpile the topsoil of the well pad. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

### **C. Closed Loop System**

**Rifleman 6 Fed. Com. # 4H:** Closed Loop System- V- Door Northeast

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

### **D. FEDERAL MINERAL MATERIALS PIT**

If the operator elects to surface the access road and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and access road and other facilities on the lease.

Payment shall be made to the BLM prior to removal of any additional federal mineral materials from any site other than the reserve pit. Call the Carlsbad Field Office at (575) 234-5972.

### **E. WELL PAD SURFACING**

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

## **F. ON LEASE ACCESS ROADS**

### **Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

### **Surfacing**

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

### **Crowning**


Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

### **Ditching**

Ditching shall be required on both sides of the road.

### **Turnouts**

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

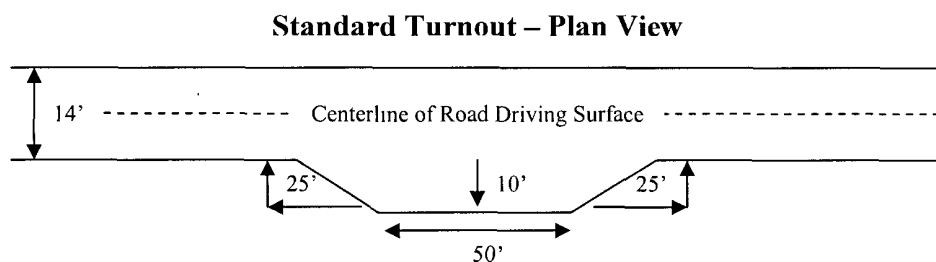


## **Drainage**

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

### **Cross Section of a Typical Lead-off Ditch**

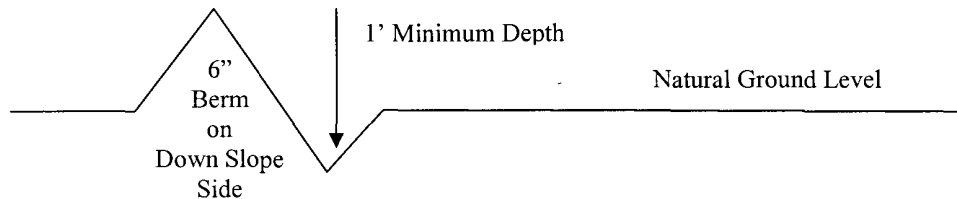

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

### **Formula for Spacing Interval of Lead-off Ditches**

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

## **Culvert Installations**

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

## **Cattleguards**

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

**Fence Requirement**


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

**Public Access**

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 – Cross Sections and Plans For Typical Road Sections

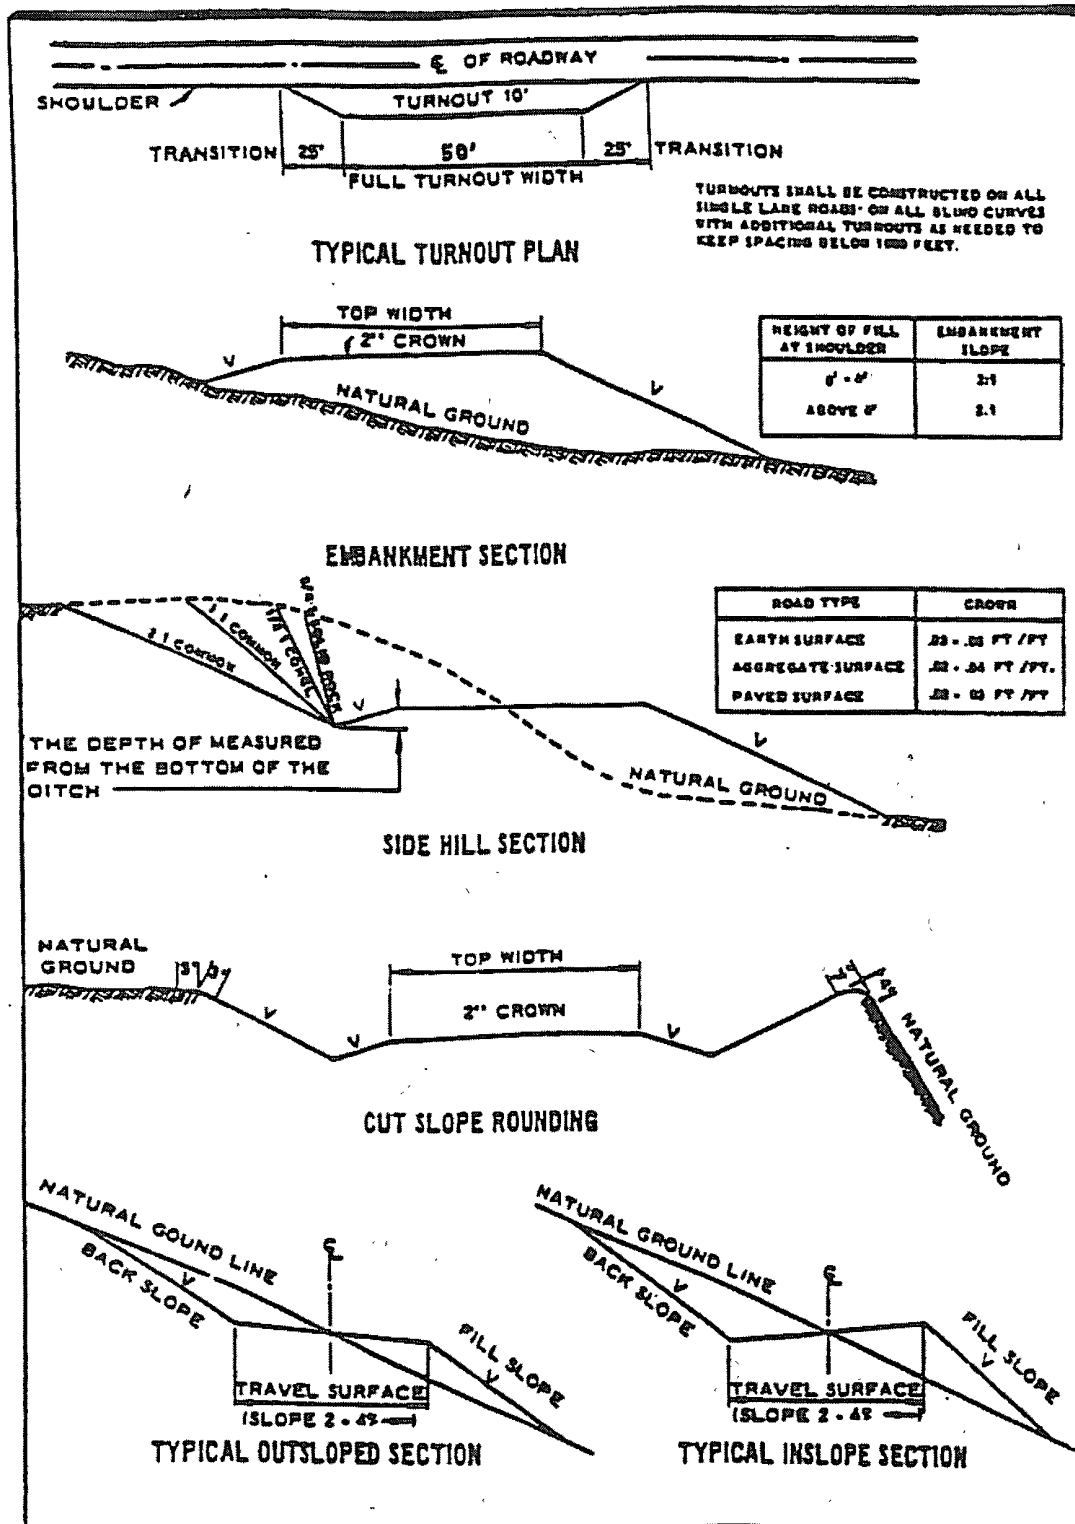



## **VII. DRILLING**

### **A. DRILLING OPERATIONS REQUIREMENTS**

The BLM is to be notified a minimum of 4 hours in advance for a representative to witness:

- a. Spudding well
- b. Setting and/or Cementing of all casing strings
- c. BOPE tests

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,  
(575) 361-2822

1. **Hydrogen Sulfide has been reported in the Canyon and Morrow formations, but has not been reported as a hazard and no measurements have been recorded. It is recommended that monitoring equipment be onsite for potential Hydrogen Sulfide. If Hydrogen Sulfide is encountered, please report measurements and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

### **B. CASING**

**Changes to the approved APD casing and cement program require submitting a sundry and receiving approval prior to work. Failure to obtain approval prior to work will result in an Incident of Non-Compliance being issued.**

**Centralizers required on surface casing per Onshore Order 2.III.B.1.f.**

**Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. See individual casing strings for details regarding lead cement slurry requirements.**

**No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.**

**High cave/karst.**

**Possible lost circulation in the Capitan Reef, Delaware and Bone Spring formations. Possible high pressure in the Wolfcamp and in the Pennsylvanian Section especially the Atoka Clastics.**

1. The 13-3/8 inch surface casing shall be set **at approximately 600 feet at the top of the Capitan Reef** and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with a surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
  - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

**Intermediate casing to be set in the base of the Capitan Reef above the Delaware Mountain Group at approximately 2200'.**

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above.  
**Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**

Formation below the 9-5/8" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe and the mud weight for the bottom of the hole. Report results to BLM office.

**NOTE: If the formation fails the test, an additional casing string will be required.**

**Centralizers required on horizontal leg, must be type for horizontal service and minimum of one every other joint.**

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
  - a. First stage to DV tool, cement shall:
    - ☒ Cement to circulate. If cement does not circulate, contact the appropriate BLM office, before proceeding with second stage cement job.
  - b. Second stage above DV tool, cement shall:
    - ☒ Cement to circulate. If cement does not circulate, contact the appropriate BLM office.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

#### **C. PRESSURE CONTROL**

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 9-5/8" intermediate casing shoe shall be **5000 (5M)** psi. **Annular prevetor must be rated to 5M.**
4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. The tests shall be done by an independent service company.
  - b. The results of the test shall be reported to the appropriate BLM office.

- c. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- d. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.
- e. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the **Wolfcamp** formation, if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.
- f. **Effective November 1, 2008, no variances will be granted on reduced pressure tests on the surface casing and BOP/BOPE. Onshore Order 2 requirements will be in effect.**

#### **D. DRILLING MUD**

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the **Wolfcamp** formation, and shall be used until production casing is run and cemented.

#### **E. DRILL STEM TEST**

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

**NOTE: Area code for Eddy and Lea Counties is 575, area code for Albuquerque and Santa Fe is still 505.**

**WWI 123008**

## **VIII. PRODUCTION (POST DRILLING)**

### **A. WELL STRUCTURES & FACILITIES**

#### **Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

#### **Containment Structures**

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

#### **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color  
Shale Green, Munsell Soil Color Chart # 5Y 4/2

### **B. PIPELINES**

### **C. ELECTRIC LINES**

## **IX. INTERIM RECLAMATION & RESERVE PIT CLOSURE**

### **A. INTERIM RECLAMATION**

If the well is a producer, interim reclamation shall be conducted on the well site in accordance with the orders of the Authorized Officer. The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

The operators should work with BLM surface management specialists to devise the best strategies to reduce the size of the location. Any reductions should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

BLM SERIAL NO.  
COMPANY REFERENCE  
WELL NO. & NAME

Seed Mixture 3, for Shallow Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass ( <i>Setaria magrostachya</i> )	1.0
Green Spangletop ( <i>Leptochloa dubia</i> )	2.0
Side oats Grama ( <i>Bouteloua curtipendula</i> )	5.0

\*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed  
(Insert Seed Mixture Here)

## **X. FINAL ABANDONMENT & REHABILITATION REQUIREMENTS**

Upon abandonment of the well and/or when the access road is no longer in service the Authorized Officer shall issue instructions and/or orders for surface reclamation and restoration of all disturbed areas.

On private surface/federal mineral estate land the reclamation procedures on the road and well pad shall be accomplished in accordance with the private surface land owner agreement.