

Submit 1 Copy To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.	30-015-29460
5. Indicate Type of Lease	STATE ☒ FEE ☐
6. State Oil & Gas Lease No.	001796
7. Lease Name or Unit Agreement Name	Poker Lake Unit
8. Well Number	127
9. OGRID Number	260737
10. Pool name or Wildcat	Poker Lake (Delaware)
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	3349' GL

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
BOPCO, L.P.

3. Address of Operator
P.O. Box 2760
Midland, TX 79702

4. Well Location
Unit Letter L : 1980 feet from the South line and 660 feet from the West line
Section 2 Township 25S Range 30E NMPM County Eddy

RECEIVED
APR 19 2010
NMOCD ARTESIA

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOBS ☐

**Notify OCD 24 hrs. prior
to any work done.**

OTHER: Repair previous P&A wellbore ☒

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

BOPCO, L.P. respectfully requests permission to repair the subject wellbore which was previously P&A'ed (04/22/97):

1. MIRU pulling unit and plugging equipment. Set open top steel pit for plugging. ND WH & NU 3,000 psi manual BOP.
2. RIH with mill and mill out the 4 existing plugs: Surface - 185'; 3850' - 4100'; 5,600' - 6,200'; 6,488' - 6 755'. POOH with mill.
3. Circulate w/ 9.5 ppg salt gel and pressure test casing to 500#.
4. RIH with tbq and spot 100 sxs Class H cement from 7,700' to 7,990', WOC & TAG.
5. PUH and spot 75 sxs Class C cement from 5,850' to 6,050', WOC & TAG.
6. PUH and spot 175 sxs Class C cement from 3,850' to 4,400', WOC & TAG.
7. PUH and spot 100 sxs Class C cement from 890' to 1200', WOC & TAG.
8. PUH and spot 25 sxs Class C cement from surf to 60'.
9. ND BOP and cut off well head 5' below ground level. Rig down rig and P&A equipment.
10. Set P&A marker and remediate location.
11. Use steel tank and haul all fluids.

Spud Date:

03/30/1997

Rig Release Date:

04/23/1997

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Valerie Truax

TITLE Regulatory Admin Assistant

DATE 04/15/2010

Type or print name Valerie Truax

E-mail address: vltruax@basspet.com

PHONE: (432)683-2277

For State Use Only

APPROVED BY:

AD Harker

TITLE

DATE 4/20/2010

Conditions of Approval (if any):

Approval Granted providing work
is complete by 7/20/2010

CURRENT

LEASE: POKER LAKE UNIT WELL #: 127
 FIELD: POKER LAKE (DELAWARE)
 LOCATION: 1980' FSL & 660' FWL, SECTION 2, T25S, R30E
 COUNTY: EDDY ST: NN API: 30-015-29460

KB: 3333'
 GL: 3349
 SPUD DATE: 3/30/1997
 P&A DATE: 4/23/1997

SURFACE CASING


SIZE	11-3/4"
WT/GRD	42# WC-40
CSA	947'
SX	561 C
CIRC	Y
TOC	SURF
HOLE SIZE	14-3/4" 0-949'

INTERMEDIATE CASING

SIZE	8-5/8"
WT/GRD	32 & 28# WC-50 & K-55
CSA	3973'
SX	1370
CIRC	Y
TOC	SURF
HOLE SIZE	11" 947-3973'

PRODUCTION CASING

SIZE	
WT/GRD	
CSA	
SX	
CIRC	
TOC	
HOLE SIZE	7-7/8" 3973-7992'

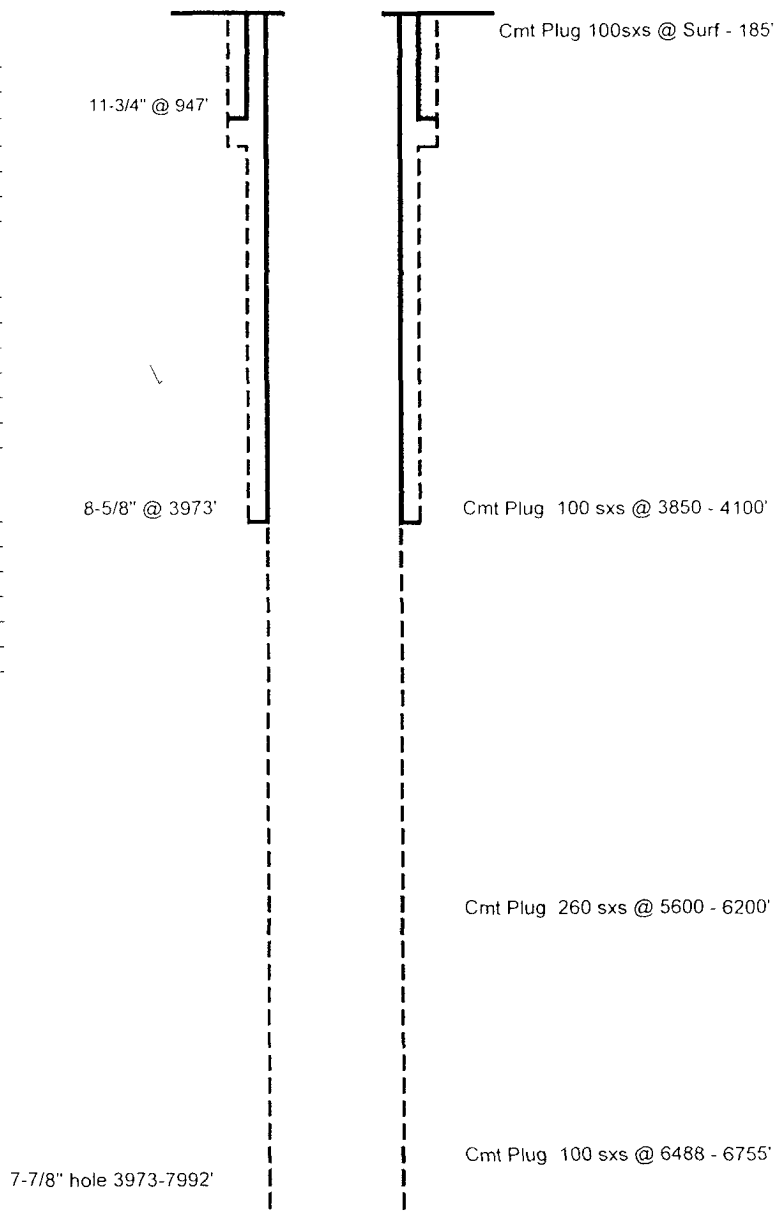

TD: 7992'

Updated: 4/12/2010
 Author: crm
 Engr: CCC

PROPOSED PA

LEASE: POKER LAKE UNIT WELL #: 127
 FIELD: POKER LAKE (DELAWARE)
 LOCATION: 1980' FSL & 660' FWL, SECTION 2, T25S, R30E
 COUNTY: EDDY ST: NN API: 30-015-29460

KB: 3333'
 GL: 3349
 SPUD DATE: 3/30/1997
 P&A DATE: 4/23/1997

SURFACE CASING

SIZE 11-3/4"
 WT/GRD 42# WC-40
 CSA 947'
 SX 561 C
 CIRC Y
 TOC SURF
 HOLE SIZE 14-3/4" 0-949'

11-3/4" @ 947'

Surface Plug - Surf - 60',
 25 sxs Class C cmt
 Shoe/T Salt Plug - 890' - 1200',
 100 sxs Class C cmt, WOC & TAG

INTERMEDIATE CASING

SIZE 8-5/8"
 WT/GRD 32 & 28# WC-50 & K-55
 CSA 3973'
 SX 1370
 CIRC Y
 TOC SURF
 HOLE SIZE 11" 947-3973'

8-5/8" @ 3973'

Shoe/B Salt/T Injection Interval Plug 3850' - 4400',
 175 sxs Class C cmt, WOC & TAG

PRODUCTION CASING

SIZE _____
 WT/GRD _____
 CSA _____
 SX _____
 CIRC _____
 TOC _____
 HOLE SIZE 7-7/8" 3973-7992'

7-7/8" HOLE 3973-7992'

Bottom of Injection Interval Plug 5850' - 6050',
 75 sxs Class C cmt, WOC & TAG

Bone Springs Plug 7700' - 7990'
 100 sxs Class H cmt, WOC & TAG

TD: 7992'

Updated 4/12/2010
 Author cm
 Engr CCC

S/30E

