Form 3160-5 (April 2004)

OCD-ARTESIA UNITED STATES

DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGÉMENT

FORM APPROVED OMB NO. 1004-0137 Expires March 31, 2007

6. If Indian, Allottee or Tribe Name

5. Lease Serial No.

NM-05608	

Do not use this form for proposals to drill or to re-enter an

abandoned well. Use Form 3160-3 (APD) for such proposals.


SUNDRY NOTICES AND REPORTS ON WELLS

7. If Unit or CA/Agreement, Name and/or No. SUBMIT IN TRIPLICATE - Other instructions on reverse side NM-91035 1. Type of Well 8. Well Name and No. X Oil Well Gas Well #2 Bone Flats 12 2. Name of Operator Federal Com 🗸 OXY USA WTP LP (Attn: Jereme Robinson 15.022) 9. API Well No. 3b. Phone No. (include area code) 3a. Address 30-015-28304 Box 27757, Houston, TX 77227-7757 713,366-5360 10. Field and Pool, or Exploratory Area 4. Location of Well (Footage, Sec., T., R., M., or Survey Description) South Dagger Draw/ Upper Pen Associate ~ Lat. 32.494790 1980'' FNL 660' FWL 11. County or Parish, State Long. 103.562010 CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION Notice of Intent Acidize Deepen Production (Start/Resume) Water Shut-Off Alter Casing Fracture Treat Reclamation Well Integrity Subsequent Report Casing Repair **New Construction** Recomplete Change Plans Plug and Abandon Temporarily Abandon Final Abandonment Notice Convert to Injection Plug Back Water Disposal 13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the final site is ready for final inspection.) OXY USA WTP LP request an extension T/A for a period of 1 for future Yeso Recompletion. CIBP @ 7724' w/ 10' cmt TD: 8000' Perfs: 7774-7894' Well passed MIT 01/06/2011, BLM witness Paul Swartz. See attached chart and Wellbore Diagram. Accepted for record APPROVED Well is approved to be TA/SI for a period of 1 year or until 12/3/2011. The BLM reserves the right to refuse to extend this TA. Operator has requested an annual FEB 10 2011 renewal option for 3 years. TA to be review annually. /s/ JD Whitlock Jr No TA will extend past 6/9/2013, This is from the date of the first TA request. BUREAU OF LAND MANAGEMENT CARLSBAD FIELD OFFICE

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed)	Title			
Jereme_Robinson/jereme_robinson@oxy.com	Regulatory Analyst	<u> </u>		
A AA	Date 01/16/2010			
THIS SPACE FOR FEDERAL OR STATE OFFICE USE				
Approved by	Title	Date		

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title 18 U.S.C. Section 1001, and Title 43 U.S.C. Section 1212, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

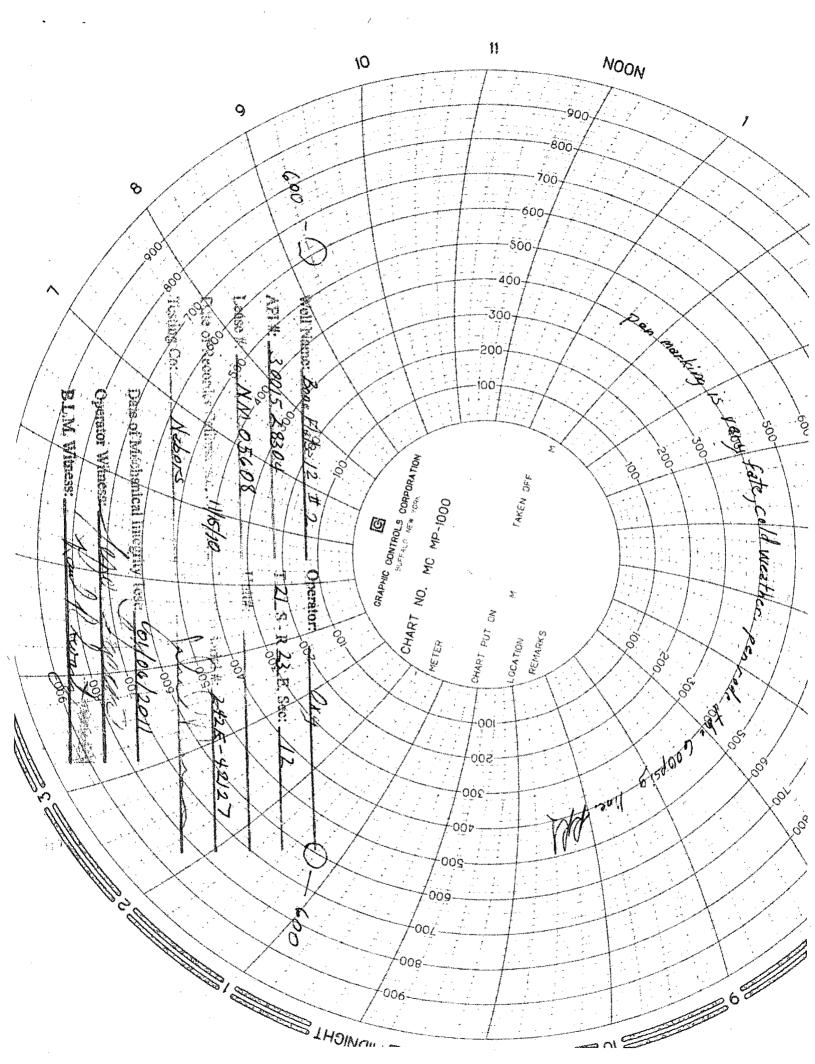

Spud: 02/22/95 G.L. Elev.: 3787' K.B.: 3803'

> Conductor Casing 16" Set at 76'. Cmt to surface w/ Redi-Mix

Surface Casing 9 5/8" 36# Set at 1212', Cmt. w/ 800 sks. Circ. 350 sks.

Bone Flats #2 1980' FNL and 660' FWL UL "E", Section 12, T-21-S, R-23-E Eddy County, New Mexico

CIBP Set at 7724' with 10' of Cement Dump Bailed on Top

Perforations: 7774'-7848', 7876'-7894' (2 jspf)

Production Casing 7" 23 & 26# Set at 8000', Cmt. W/1200 sks. Circ. 110

PBTD: 7954' TD: 8000'