

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on reverse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-22615

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Camack Federal

9. WELL NO.

3

10. FIELD AND POOL, OR WILDCAT

Undesignated ABO

11. SEC., T., R., M., OR BLE. AND
SURVEY OR AREA

Sec 12, T5S, R24E

12. COUNTY OR PARISH

Chaves

13. STATE

New Mexico

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐

2. NAME OF OPERATOR
Mesa Petroleum Co. ✓

3. ADDRESS OF OPERATOR
1000 Vaughn Building/ Midland, Texas 79701

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
1980' FSL & 1980' FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3898.9' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐

(Other) Amend Drilling Program

PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐ABANDON* ☐CHANGE PLANS ☐

X

SUBSEQUENT REPORT OF:


WATER SHUT-OFF ☐FRACTURE TREATMENT ☐SHOOTING OR ACIDIZING ☐(Other) ☐REPAIRING WELL ☐ALTERING CASING ☐ABANDONMENT* ☐(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Proposed to amend approved Drilling Program as follows:

Drill 17 1/2" hole to 800' on air. Set 13 3/8" casing and cement to surface. Reduce hole to 11" and drill to 1500' to set 8 5/8" casing. Nipple up ram type BOP's and reduce hole to 7 7/8" to drill to total depth using air, foam or mud as required. After log evaluation, 4 1/2" casing may be run and cemented with sufficient kinds and amounts to isolate and seal off any fresh water, oil, or gas zones encountered after the casing point.

Gas Sales are not dedicated.

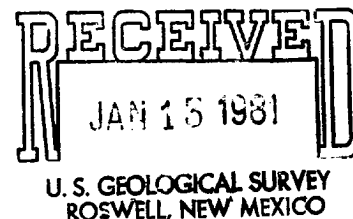

xc: USGS (6), TLS, HOBBS OFC, MEC, FILE

18. I hereby certify that the foregoing is true and correct

SIGNED

R. E. Mathis

TITLE Regulatory Coordinator

DATE 1-9-81

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE JAN 15 1981

CONDITIONS OF APPROVAL, IF ANY:

4-5/8" casing will be set if water is encountered below the 13-3/8" casing shoe.

*See Instructions on Reverse Side