

DEC-13-02 10:33 From:815221

150539397

Form C-103
Revised March 25, 1999

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

WELL API NO. 30-015-28463	
5. Indicate Type of Lease STATE ☒ FEE ☐	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name: Murchison 2 state	
8. Well No. 2	
9. Pool name or Wildcat Black River, Delaware south	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
Oil Well ☒ Gas Well ☐ Other ☐
2. Name of Operator
Chevron USA, Inc.
3. Address of Operator
15 Smith Rd. Midland, TX 79705
4. Well Location
Unit Letter I : 1830 feet from the south line and 330 feet from the east line
Section 2 Township 25-S Range 26-E NMPM County Eddy
10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

- NOTICE OF INTENTION TO:**
- PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
- TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
- PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
- OTHER: ☐

- SUBSEQUENT REPORT OF:**
- REMEDIAL WORK ☐ ALTERING CASING ☐
- COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
- CASING TEST AND CEMENT JOB ☐
- OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify OCD 24 hrs prior to MI & RU
2. Set 5 1/2 CIBP @ 5075, spot 25sx plug 5075-4875 (Brushy Canyon) WOC Tag.
3. Displace hole w/MLF, 9.5 # Brine W/25 # Gel P/BHL.
4. Spot 30sx plug 3000-2700 (Internal plug)
5. Spot 30sx plug 1850-1550 (8 5/8 shoe) WOC Tag.
6. Perf 4 holes @ 300, sqz 75sx plug 300-surf, 5 1/2 X 8 5/8 (Fresh wtr, surf) WOC Tag.
7. Install dry hole marker.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G. R. Bledsoe

TITLE HES Specialist

DATE 12/11/2002

Type or print name G. R. Bledsoe

Telephone No. 915-687-745

APPROVED BY [Signature]

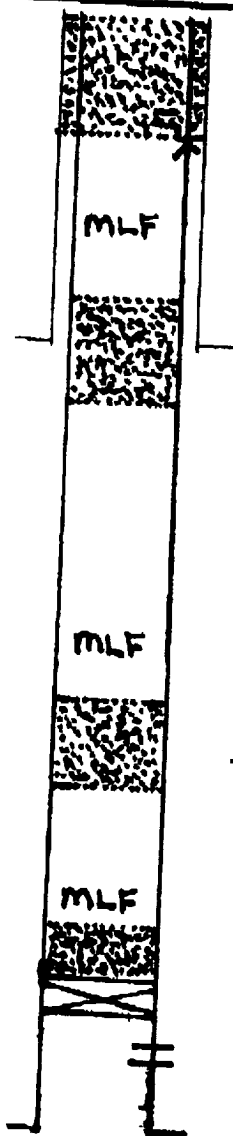
TITLE Field Rep ID

DATE DEC 13 2002

Conditions of approval, if any:

COMMIT WORKSHEET

(2 STRING CSNG)

OPERATOR CHEVRON USA INC.LEASE NAME MURCHISON STATE 2WELL # 2SECT 2 TWN 25-S RNG 26-E
FROM 1830 NSL 330 BWL TD 5600 FORMATION @ TD PBDT FORMATION @ PBDT Brushy Canyon

8 5/8
@ 1800
TOC SURE

5 1/2
@ 5600
TOC 1500

TD 5600

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	<u>8 5/8</u>	<u>1800</u>	<u>SURE</u>	<u>Circ</u>
INTMED 1				
INTMED 2				
PROD	<u>5 1/2</u>	<u>5600</u>	<u>1500</u>	<u>CALC</u>

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1		
INTMED 2	PERFS	<u>5138-5152</u>
PROD	OPENHOLE	

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	<u>1</u>	<u>CIBP</u>	<u>15</u>	<u>5075</u>
YATES	<u>2</u>	<u>THIN</u>	<u>30</u>	<u>3000</u>
QUEEN	<u>3</u>	<u>8 5/8 S</u>	<u>30</u>	<u>1850</u>
GRAYBURG	<u>4</u>	<u>SURE</u>	<u>75</u>	<u>300</u>
SAN ANDRES				
CAPTAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINERY				
TUBB				
DRINKARD				
ARO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				