

Submit to Appropriate District Office
State Lease - 6 copies
Fee Lease - 5 copies
District I
1625 N. French, Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-105
Revised June 10, 2003

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.

30-015-33442

5. Indicate Type Of Lease

STATE ☐ FEE ☐

6. State Oil & Gas Lease No.

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well:

OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER _____

b. Type of Completion:

NEW WELL ☒ WORK OVER ☐ DEEPEN ☐ PLUG BACK ☐ DIFF. RESVR. ☐ OTHER _____

RECEIVED

SEP 20 2004

OLD ARTESIA

7. Lease Name or Unit Agreement Name

Big Walt 2 State

8. Well No.

10

9. Pool name or Wildcat

Indian Basin; Upper Penn. Ass.

2. Name of Operator

Nearburg Producing Company

3. Address of Operator

3300 N A St., Bldg 2, Ste 120, Midland, TX 79705

4. Well Location

Unit Letter H : 2006 Feet From The North Line and 703 Feet From The East Line

Section 2

Township 22S

Range 24E

NMPM

Eddy

County

10. Date Spudded

6/29/04

11. Date T.D. Reached

7/25/04

12. Date Compl. (Ready to Prod.)

8/18/04

13. Elevations (DF & RKB, RT, GR, etc.)

3866'

14. Elev. Casinghead

15. Total Depth

8456

16. Plug Back T.D.

8405

17. If Multiple Compl. How Many Zones?

18. Intervals Drilled By

Rotary Tools

X

Cable Tools

19. Producing Interval(s), of this completion - Top, Bottom, Name

8031-8211 (OA)

20. Was Directional Survey Made

Yes

21. Type Electric and Other Logs Run

Litho Density; Comp Neutron

22. Was Well Cored

No

23. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
9-5/8	36#	1543	14-3/4	1380 sxs	170 sxs to pit
7	23 & 26#	8456	8-3/4	1450 sxs	

24. LINER RECORD

SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN	SIZE	DEPTH SET	PACKER SET
					2-7/8	8163	

26. Perforation record (interval, size, and number)

8031-8211 (OA) 4 JSPF (720 Holes)

27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED
8031-8211	755 bbls 20% HCL

28. PRODUCTION

Date First Production 8/18/04		Production Method (Flowing, gas lift, pumping - Size and type pump) Pumping				Well Status (Prod. or Shut-in) Producing	
Date of Test 8/28/04	Hours Tested 24	Choke Size	Prod'n For Test Period	Oil - Bbl. 208	Gas - MCF 91	Water - Bbl. 4058	Gas - Oil Ratio 19510:1
Flow Tubing Press. 310	Casing Pressure 230	Calculated 24-Hour Rate	Oil - Bbl. 208	Gas - MCF 91	Water - Bbl. 4058	Oil Gravity - API -(Corr.) 39.1	

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

Test Witnessed By

Bill Young

30. List Attachments

C104. Logs: Surveys

31. I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief

Signature

Printed Name

Sarah Jordan

Title Production Analyst Date 9/17/04

E-mail address

s.jordan@nearburg.com

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, Items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northeastern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn. "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry	T. Gr. Wash	T. Morrison	T.
T. Tubb	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs	T. Entrada	T.
T. Abo	T.	T. Wingate	T.
T. Wolfcamp 7558		T. Chinle	T.
T. Penn	T. Z Bone Spring 5780	T. Permian	T.
T. Cisco (Bough C) 8031	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from 8031 to 8206
 No. 2, from to
 No. 3, from to
 No. 4, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.



No. 1, from to feet
 No. 2, from to feet
 No. 3, from to feet

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness in Feet	Lithology	From	To	Thickness in Feet	Lithology
1000	2880	1880	Dolo; Sand				
2880	5860	2980	Lime				
5860	6000	140	Sand				
6000	7140	1140	Lime				
7140	7530	390	Sand				
7530	8031	501	Shale				
8031	8456	425	Dolo				

Nearburg Producing Company

WELL	Big Walt 2 State 10	FIELD	Eddy County, NM	STRUCTURE	Big Walt 2 State 10
Magnetic Parameters Model: IGRF 2000 Dip: 80.451° Date: July 27, 2004 Surface Location Lat: N33 25 21.886 Northing: 517533.10 BUS NAD27 New Mexico State Plane, Eastern Zone, US Feet Mag Dec: +9.015° FS: 49490.8 nT Lon: W104 27 44.273 Easting: 450295.10 BUS Ghd Conv: -0.08914809° Scale Fact: 0.999109045 Miscellaneous Slot: Big Walt 2 State 10 TVD Ref: (0.00 ft above) Plan: Big Walt 2 ST-10 surveys Srv Date: Tue 03:32 PM July 27, 2004					

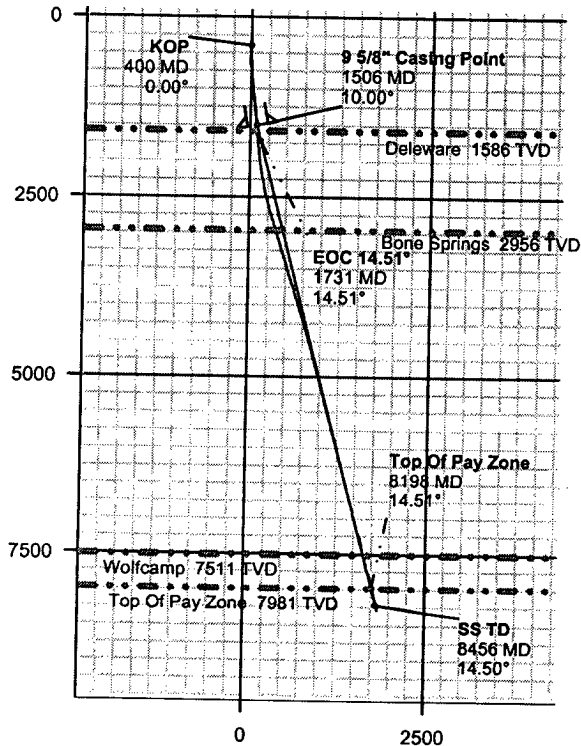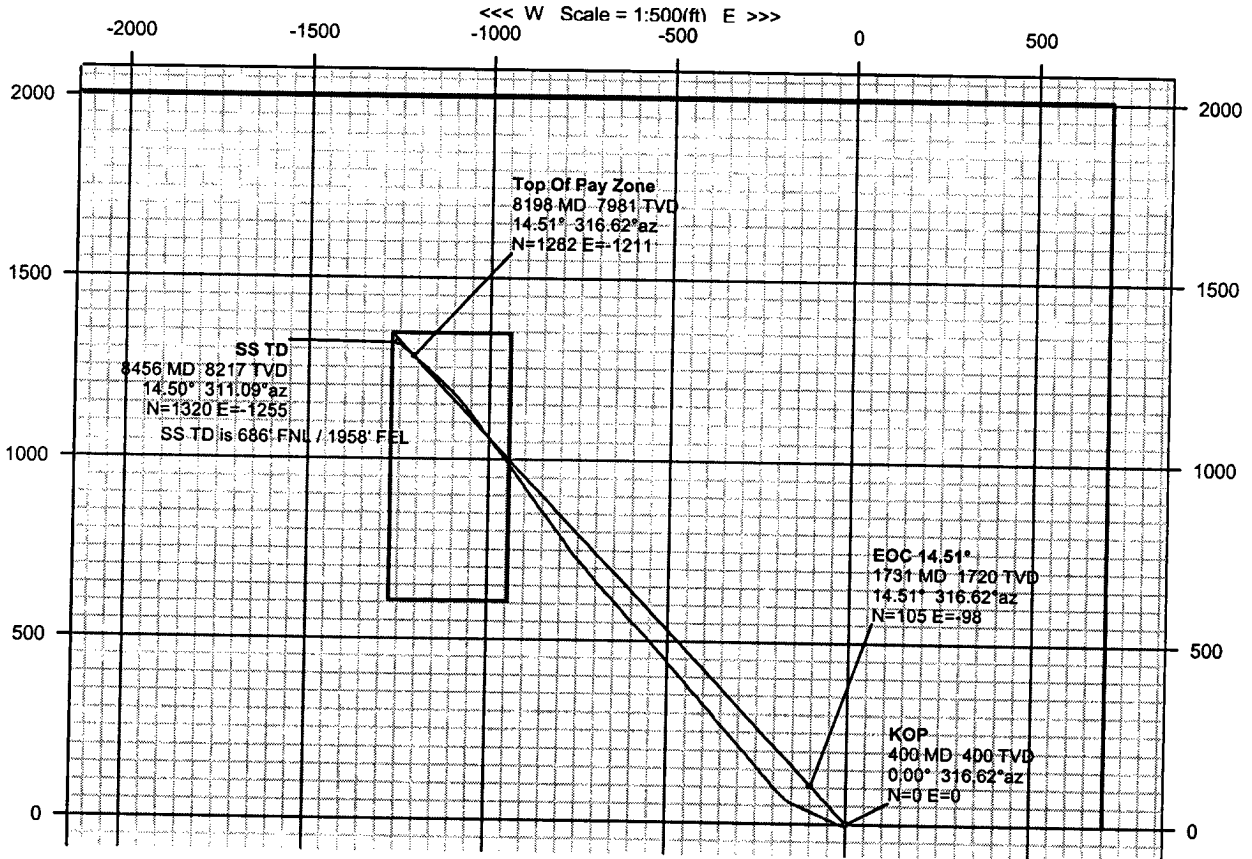

Departure (ft) Azim = 316.62°, Scale = 1:2500 Origin = 0 N-S, 0 E-W

INTREPID
Directional Drilling Specialists



Survey Report

Report Date: July 28, 2004	Survey / DLS Computation Method: Minimum Curvature / Lubinski
Client: Nearburg Producing Company	Vertical Section Azimuth: 316.617°
Field: Eddy County, NM	Vertical Section Origin: N 0.000 ft, E 0.000 ft
Structure / Slot: Big Walt 2 State 10 / Big Walt 2 State 10	TVD Reference Datum:
Well: Big Walt 2 State 10	TVD Reference Elevation: 0.0 ft relative to
Borehole: Big Walt 2 State 10	Sea Bed / Ground Level Elevation: 0.000 ft relative to
UWI/API#:	Magnetic Declination: 9.015°
Survey Name / Date: Big Walt 2 ST 10_surveys / July 27, 2004	Total Field Strength: 49490.835 nT
Tort / AHD / DDI / ERD ratio: 80.936° / 1853.72 ft / 5.189 / 0.226	Magnetic Dip: 60.451°
Grid Coordinate System: NAD27 New Mexico State Planes, Eastern Zone, US Feet	Declination Date: July 27, 2004
Location Lat/Long: N 32 25 21.886, W 104 27 44.273	Magnetic Declination Model: IGRF 2000
Location Grid N/E Y/X: N 517533.100 ftUS, E 460206.100 ftUS	North Reference: Grid North
Grid Convergence Angle: -0.06914609°	Total Corr Mag North -> Grid North: +9.084°
Grid Scale Factor: 0.99991090	Local Coordinates Referenced To: Well Head

Comments	Survey Type (Markers)	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
Tie-In	***	0.00	0.00	316.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-172.50M
	***	156.00	0.60	187.50	156.00	-0.52	-0.81	-0.11	0.82	187.50	0.38	143.60M
	***	337.00	0.70	143.60	336.99	-2.21	-2.64	0.43	2.67	170.84	0.27	175.70M
	***	514.00	0.80	175.70	513.97	-4.24	-4.74	1.16	4.88	166.25	0.24	-170.60M
	***	537.00	0.60	189.40	536.97	-4.44	-5.02	1.15	5.15	167.07	1.13	-135.70M
	***	565.00	0.70	224.30	564.97	-4.54	-5.29	1.01	5.38	169.20	1.43	-118.70M
	***	596.00	1.00	241.30	595.97	-4.48	-5.55	0.64	5.59	173.43	1.25	-95.90M
	***	627.00	1.50	264.10	626.96	-4.16	-5.72	-0.00	5.72	180.01	2.25	-85.70M
	***	657.00	2.20	274.30	656.94	-3.49	-5.72	-0.97	5.80	189.58	2.57	-81.70M
	***	688.00	2.80	278.30	687.91	-2.46	-5.57	-2.31	6.03	202.52	2.01	-79.30M
	***	719.00	3.40	280.70	718.87	-1.12	-5.29	-3.96	6.61	216.84	1.98	-77.40M
	***	750.00	4.10	282.60	749.80	0.54	-4.88	-5.95	7.69	230.65	2.29	-75.20M
	***	780.00	4.90	284.80	779.71	2.52	-4.31	-8.23	9.29	242.34	2.73	-72.80M
	***	811.00	5.60	287.20	810.58	4.96	-3.53	-10.96	11.51	252.15	2.37	14.98G
	***	841.00	6.30	288.90	840.42	7.69	-2.56	-13.91	14.15	259.56	2.41	15.71G
	***	872.00	6.90	290.30	871.21	10.87	-1.37	-17.27	17.32	265.48	2.00	10.23G
	***	903.00	7.40	291.00	901.97	14.34	-0.00	-20.88	20.88	269.99	1.64	9.23G
	***	934.00	8.00	291.70	932.69	18.09	1.51	-24.75	24.79	273.49	1.96	2.75G
	***	964.00	8.30	291.80	962.39	21.95	3.08	-28.70	28.86	276.14	1.00	16.86G
	***	994.00	8.70	292.60	992.06	25.99	4.76	-32.80	33.15	278.26	1.39	7.67G
	***	1025.00	9.30	293.10	1022.68	30.43	6.64	-37.27	37.86	280.11	1.95	39.73G
	***	1055.00	9.50	294.10	1052.27	34.94	8.61	-41.76	42.64	281.65	0.86	178.86G
	***	1575.00	4.10	295.60	1568.42	91.97	34.18	-97.74	103.54	289.28	1.04	-64.50M
	***	1606.00	4.00	295.50	1599.35	94.02	35.12	-99.71	105.72	289.41	0.32	-67.90M
	***	1623.00	4.20	292.10	1616.30	95.14	35.61	-100.82	106.93	289.45	1.85	-68.20M
	***	1655.00	4.40	291.80	1648.21	97.32	36.51	-103.05	109.33	289.51	0.63	-67.50M
	***	1687.00	4.90	292.50	1680.11	99.68	37.49	-105.45	111.92	289.57	1.57	-68.50M
	***	1718.00	5.80	291.50	1710.97	102.31	38.57	-108.13	114.81	289.63	2.92	-4.25G
	***	1749.00	6.40	291.10	1741.80	105.28	39.77	-111.20	118.10	289.68	1.94	-30.44G
	***	1780.00	6.70	289.60	1772.59	108.45	40.99	-114.52	121.63	289.70	1.11	6.95G
	***	1812.00	7.00	289.90	1804.37	111.86	42.28	-118.11	125.45	289.70	0.94	4.84G
	***	1844.00	7.30	290.10	1836.12	115.42	43.65	-121.85	129.43	289.71	0.94	43.81G
	***	1875.00	7.70	292.90	1866.85	119.08	45.13	-125.62	133.48	289.76	1.75	11.66G
	***	1907.00	7.90	293.20	1898.56	123.06	46.83	-129.61	137.81	289.87	0.64	15.75G
	***	1939.00	8.10	293.60	1930.24	127.16	48.60	-133.70	142.26	289.98	0.65	43.21G
	***	1971.00	8.40	295.50	1961.91	131.41	50.51	-137.87	146.84	290.12	1.27	16.86G
	***	2002.00	8.70	296.10	1992.57	135.72	52.52	-142.02	151.42	290.29	1.01	0.00G
	***	2034.00	9.00	296.10	2024.19	140.33	54.68	-146.44	156.32	290.48	0.94	42.86G
	***	2065.00	9.30	297.80	2054.79	144.97	56.92	-150.84	161.22	290.67	1.30	55.07G
	***	2095.00	9.50	299.50	2084.39	149.63	59.27	-155.14	166.07	290.91	1.14	66.52G

Comments	Survey Type (Markers)	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	***	2127.00	9.70	302.10	2115.94	154.77	62.00	-159.72	171.33	291.22	1.49	70.09G
	***	2159.00	9.90	305.10	2147.48	160.07	65.01	-164.25	176.65	291.59	1.71	74.54G
	***	2190.00	10.10	308.80	2178.00	165.38	68.25	-168.55	181.85	292.04	2.17	68.63G
	***	2222.00	10.30	311.50	2209.50	171.01	71.90	-172.88	187.24	292.58	1.62	39.53G
	***	2253.00	10.50	312.40	2239.99	176.58	75.64	-177.04	192.53	293.14	0.83	79.42G
	***	2284.00	10.60	315.00	2270.47	182.25	79.57	-181.15	197.85	293.71	1.57	33.36G
	***	2316.00	10.80	315.70	2301.91	188.19	83.79	-185.32	203.38	294.33	0.75	41.22G
	***	2348.00	11.30	317.90	2333.32	194.32	88.26	-189.52	209.06	294.97	2.04	24.60G
	***	2380.00	11.70	318.80	2364.67	200.70	93.03	-193.76	214.93	295.65	1.37	-22.98G
	***	2412.00	12.20	317.80	2395.98	207.32	97.98	-198.16	221.06	296.31	1.69	-6.32G
	***	2443.00	12.80	317.50	2426.25	214.03	102.94	-202.68	227.32	296.92	1.95	34.35G
	***	2475.00	13.10	318.40	2457.43	221.20	108.26	-207.49	234.03	297.55	1.13	0.00G
	***	2505.00	13.60	318.40	2486.62	228.12	113.44	-212.09	240.52	298.14	1.67	0.00G
	***	2536.00	14.10	318.40	2516.72	235.54	118.99	-217.01	247.49	298.74	1.61	-16.85G
	***	2566.00	14.60	317.80	2545.78	242.97	124.52	-221.98	254.52	299.29	1.74	50.59G
	***	2598.00	14.90	319.20	2576.73	251.11	130.63	-227.38	262.23	299.88	1.46	9.34G
	***	2660.00	15.90	319.80	2636.50	267.56	143.15	-238.07	277.79	301.02	1.63	-42.65G
	***	2693.00	16.30	318.50	2668.21	276.70	150.07	-244.05	286.50	301.59	1.63	25.94G
	***	2756.00	16.90	319.50	2728.58	294.68	163.65	-255.86	303.72	302.60	1.05	0.00G
	***	2820.00	17.50	319.50	2789.72	313.58	178.04	-268.15	321.88	303.58	0.94	-12.99G
	***	2882.00	17.90	319.20	2848.78	332.41	192.35	-280.43	340.05	304.45	0.66	-137.15G
	***	2945.00	17.30	317.30	2908.84	351.45	206.56	-293.11	358.58	305.17	1.32	8.55G
	***	3008.00	17.50	317.40	2968.95	370.29	220.42	-305.87	377.02	305.78	0.32	121.41G
	***	3071.00	17.10	319.70	3029.10	389.01	234.45	-318.27	395.31	306.38	1.26	-123.51G
	***	3134.00	16.80	318.10	3089.37	407.36	248.29	-330.35	413.25	306.93	0.88	-90.00G
	***	3196.00	16.80	317.50	3148.72	425.28	261.57	-342.38	430.86	307.38	0.28	16.31G
	***	3258.00	17.00	317.70	3208.04	443.30	274.88	-354.54	448.61	307.79	0.34	61.39G
	***	3319.00	17.30	319.50	3266.33	461.27	288.37	-366.43	466.29	308.20	1.00	-11.40G
	***	3383.00	17.60	319.30	3327.39	480.44	302.94	-378.92	485.13	308.64	0.48	-32.15G
	***	3445.00	18.20	318.10	3386.38	499.48	317.26	-391.50	503.91	309.02	1.14	180.00G
	***	3508.00	17.60	318.10	3446.33	518.84	331.67	-404.43	523.03	309.35	0.95	163.45G
	***	3570.00	17.30	318.40	3505.48	537.42	345.54	-416.81	541.41	309.66	0.51	-28.09G
	***	3632.00	17.70	317.70	3564.61	556.06	359.40	-429.27	559.86	309.94	0.73	84.05G
	***	3701.00	17.80	320.30	3630.33	577.07	375.28	-443.07	580.64	310.26	1.16	-68.20G
	***	3764.00	17.90	319.50	3690.30	596.35	390.05	-455.51	599.69	310.57	0.42	-144.91G
	***	3828.00	17.60	318.80	3751.25	615.84	404.81	-468.27	618.99	310.84	0.58	0.00G
	***	3892.00	17.60	318.80	3812.25	635.18	419.37	-481.01	638.16	311.08	0.00	121.68G
	***	3986.00	17.40	319.90	3901.90	663.42	440.81	-499.43	666.14	311.43	0.41	-50.37G
	***	4080.00	17.50	319.50	3991.58	691.56	462.31	-517.66	694.05	311.77	0.17	-149.64G
	***	4175.00	17.10	318.70	4082.28	719.79	483.66	-536.16	722.07	312.05	0.49	-149.71G
	***	4268.00	17.00	318.50	4171.19	747.04	504.12	-554.19	749.17	312.29	0.12	-87.04G
	***	4363.00	17.10	314.50	4262.02	774.88	524.31	-573.35	776.94	312.44	1.24	167.14G
	***	4425.00	16.60	314.90	4321.36	792.84	536.95	-586.13	794.90	312.49	0.83	164.79G
	***	4487.00	15.80	315.70	4380.89	810.13	549.24	-598.30	812.17	312.55	1.34	-176.20G
	***	4519.00	15.40	315.60	4411.72	818.73	555.40	-604.31	820.77	312.58	1.25	120.87G
	***	4550.00	15.20	316.90	4441.62	826.91	561.30	-609.97	828.93	312.62	1.28	51.69G
	***	4582.00	15.50	318.30	4472.48	835.38	567.56	-615.68	837.37	312.67	1.49	46.14G
	***	4612.00	15.90	319.80	4501.36	843.49	573.69	-621.00	845.43	312.73	1.90	51.56G
	***	4643.00	16.10	320.70	4531.16	852.02	580.26	-626.46	853.91	312.81	1.03	-90.00G
	***	4676.00	16.10	319.90	4562.86	861.15	587.30	-632.31	862.98	312.89	0.67	-35.14G
	***	4739.00	16.30	319.40	4623.36	878.70	600.70	-643.69	880.44	313.02	0.39	-141.05G
	***	4801.00	15.80	317.90	4682.94	895.83	613.56	-655.01	897.50	313.13	1.05	-133.40G
	***	4864.00	15.50	316.70	4743.61	912.83	626.06	-666.53	914.44	313.21	0.70	174.09G
	***	4927.00	15.00	316.90	4804.39	929.40	638.13	-677.88	930.98	313.27	0.80	-128.03G
	***	4959.00	14.90	316.40	4835.31	937.65	644.14	-683.54	939.22	313.30	0.51	119.47G
	***	4991.00	14.80	317.10	4866.24	945.85	650.11	-689.16	947.41	313.33	0.64	82.72G
	***	5022.00	14.90	319.70	4896.20	953.79	656.05	-694.43	955.32	313.37	2.17	63.47G

Comments	Survey Type (Markers)	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	***	5053.00	15.10	321.20	4926.15	961.80	662.24	-699.54	963.29	313.43	1.41	-122.98G
	***	5084.00	15.00	320.60	4956.08	969.82	668.48	-704.62	971.27	313.49	0.60	125.79G
	***	5147.00	14.80	321.70	5016.96	985.97	681.10	-714.78	987.32	313.62	0.55	-165.86G
	***	5179.00	14.60	321.50	5047.92	994.06	687.46	-719.82	995.37	313.68	0.64	-21.26G
	***	5210.00	15.00	320.90	5077.89	1001.95	693.63	-724.79	1003.22	313.74	1.38	-46.28G
	***	5242.00	15.10	320.50	5108.79	1010.24	700.06	-730.05	1011.47	313.80	0.45	-99.68G
	***	5305.00	15.00	317.90	5169.63	1026.58	712.44	-740.74	1027.75	313.88	1.08	165.58G
	***	5337.00	14.90	318.00	5200.55	1034.83	718.57	-746.26	1035.98	313.92	0.32	139.07G
	***	5368.00	14.50	319.40	5230.53	1042.69	724.48	-751.46	1043.82	313.95	1.73	-154.10G
	***	5399.00	14.10	318.60	5260.57	1050.34	730.26	-756.48	1051.45	313.99	1.44	111.66G
	***	5431.00	13.90	320.80	5291.62	1058.07	736.17	-761.49	1059.15	314.03	1.78	90.00G
	***	5461.00	13.90	323.90	5320.74	1065.24	741.87	-765.89	1066.28	314.09	2.48	22.27G
	***	5493.00	14.20	324.40	5351.79	1072.94	748.17	-770.44	1073.93	314.16	1.01	37.07G
	***	5524.00	14.50	325.30	5381.82	1080.55	754.45	-774.86	1081.48	314.24	1.21	14.43G
	***	5554.00	14.90	325.70	5410.84	1088.07	760.72	-779.17	1088.95	314.31	1.38	14.61G
	***	5585.00	15.10	325.90	5440.78	1095.99	767.36	-783.68	1096.81	314.40	0.67	46.46G
	***	5617.00	15.20	326.30	5471.67	1104.24	774.30	-788.35	1105.00	314.49	0.45	-78.22G
	***	5680.00	15.40	323.10	5532.44	1120.69	787.86	-797.95	1121.36	314.64	1.38	-114.85G
	***	5711.00	15.20	321.40	5562.34	1128.83	794.33	-802.96	1129.47	314.69	1.58	175.10G
	***	5742.00	14.90	321.50	5592.28	1136.85	800.62	-807.97	1137.46	314.74	0.97	-27.73G
	***	5773.00	15.20	320.90	5622.21	1144.87	806.90	-813.02	1145.46	314.78	1.09	55.96G
	***	5806.00	15.40	322.00	5654.04	1153.55	813.71	-818.44	1154.11	314.83	1.07	39.01G
	***	5837.00	15.60	322.60	5683.91	1161.79	820.26	-823.51	1162.32	314.89	0.83	-90.00G
	***	5868.00	15.60	322.40	5713.77	1170.09	826.88	-828.59	1170.59	314.94	0.17	38.08G
	***	5898.00	16.10	323.80	5742.63	1178.23	833.43	-833.50	1178.70	315.00	2.10	-7.99G
	***	5930.00	16.30	323.70	5773.36	1187.09	840.63	-838.78	1187.52	315.06	0.63	43.33G
	***	5961.00	16.70	325.00	5803.09	1195.81	847.78	-843.91	1196.21	315.13	1.76	174.62G
	***	6024.00	16.40	325.10	5863.48	1213.56	862.49	-854.19	1213.89	315.28	0.48	-166.78G
	***	6087.00	15.60	324.40	5924.03	1230.75	876.67	-864.21	1231.02	315.41	1.31	-154.55G
	***	6151.00	14.70	322.70	5985.81	1247.35	890.13	-874.14	1247.58	315.52	1.57	168.90G
	***	6213.00	14.20	323.10	6045.85	1262.73	902.47	-883.48	1262.93	315.61	0.82	51.15G
	***	6276.00	14.30	323.60	6106.91	1278.13	914.91	-892.73	1278.29	315.70	0.25	0.00G
	***	6338.00	14.90	323.60	6166.91	1293.64	927.49	-902.01	1293.78	315.80	0.97	-171.52G
	***	6401.00	14.40	323.30	6227.86	1309.46	940.29	-911.50	1309.57	315.89	0.80	114.00G
	***	6464.00	14.20	325.20	6288.91	1324.88	952.92	-920.59	1324.96	315.99	0.81	70.26G
	***	6526.00	14.30	326.30	6349.00	1339.95	965.53	-929.18	1340.01	316.10	0.47	-130.01G
	***	6590.00	14.00	324.80	6411.06	1355.41	978.43	-938.02	1355.44	316.21	0.74	-90.00G
	***	6622.00	14.00	323.80	6442.11	1363.08	984.72	-942.54	1363.11	316.25	0.76	-30.31G
	***	6685.00	14.70	322.20	6503.14	1378.59	997.19	-951.94	1378.61	316.33	1.28	-61.46G
	***	6749.00	14.90	320.80	6565.02	1394.88	1009.98	-962.12	1394.89	316.39	0.64	-149.63G
	***	6811.00	14.60	320.10	6624.98	1410.63	1022.15	-972.17	1410.64	316.44	0.56	90.00G
	***	6874.00	14.60	320.60	6685.94	1426.48	1034.38	-982.30	1426.48	316.48	0.20	60.88G
	***	6937.00	14.70	321.30	6746.89	1442.37	1046.75	-992.34	1442.37	316.53	0.32	58.21G
	***	7000.00	15.10	323.70	6807.78	1458.48	1059.60	-1002.20	1458.48	316.59	1.17	171.69G
	***	7064.00	14.10	324.30	6869.71	1474.48	1072.65	-1011.68	1474.48	316.68	1.58	-9.42G
	***	7126.00	14.40	324.10	6929.80	1489.60	1085.03	-1020.61	1489.61	316.75	0.49	-12.18G
	***	7188.00	15.00	323.60	6989.77	1505.21	1097.73	-1029.89	1505.22	316.83	0.99	-30.59G
	***	7251.00	15.50	322.50	7050.55	1521.68	1110.97	-1039.85	1521.69	316.89	0.92	28.64G
	***	7282.00	15.80	323.10	7080.40	1529.99	1117.64	-1044.91	1530.01	316.93	1.10	-51.39G
	***	7313.00	16.00	322.20	7110.22	1538.44	1124.39	-1050.06	1538.46	316.96	1.02	-90.00G
	***	7376.00	16.00	319.00	7170.78	1555.75	1137.80	-1061.08	1555.79	317.00	1.40	-25.11G
	***	7439.00	16.30	318.50	7231.29	1573.26	1150.97	-1072.63	1573.30	317.02	0.52	170.73G
	***	7501.00	15.80	318.80	7290.87	1590.40	1163.84	-1083.96	1590.44	317.04	0.82	-160.44G
	***	7565.00	14.60	317.10	7352.63	1607.17	1176.31	-1095.19	1607.21	317.05	2.00	-151.86G
	***	7628.00	13.10	313.50	7413.80	1622.24	1187.04	-1105.77	1622.28	317.03	2.74	-158.62G
	***	7691.00	12.60	312.60	7475.22	1636.22	1196.60	-1116.01	1636.26	317.00	0.85	139.20G
	***	7752.00	12.50	313.00	7534.77	1649.45	1205.61	-1125.74	1649.48	316.96	0.22	-1.34G

Comments	Survey Type (Markers)	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	***	7815.00	13.50	312.90	7596.15	1663.59	1215.27	-1136.11	1663.61	316.93	1.59	4.64G
	***	7879.00	14.10	313.10	7658.30	1678.83	1225.68	-1147.27	1678.85	316.89	0.94	-7.33G
	***	7941.00	14.90	312.70	7718.33	1694.32	1236.24	-1158.65	1694.33	316.86	1.30	-125.68G
	***	8004.00	14.40	309.80	7779.28	1710.18	1246.75	-1170.62	1710.18	316.80	1.41	73.37G
SS TD	SS	8456.00	14.50	311.09	8216.98	1822.31	1319.92	-1256.45	1822.32	316.41	0.07	0.00G