

OXY USA Inc. - Proposed
Lakewood 15 #1
API No. 30-015-33574

185sx @ 550'-Surface

40sx @ 1132-1032' WOC-Tag

25sx @ 3220-3050' WOC-Tag

25sx @ 4620-4520' WOC-Tag


25sx @ 6080-5920' WOC-Tag

CIBP @ 7004' w/ 25sx

6/05-CR @ 7730', sqz 100sx - PB-7725'

6/05-CIBP @ 9100' w/ 40' cmt
6/05-CIBP @ 9380' w/ 40' cmt
3/05-CIBP @ 9600' w/ 40' cmt

PB-9840'

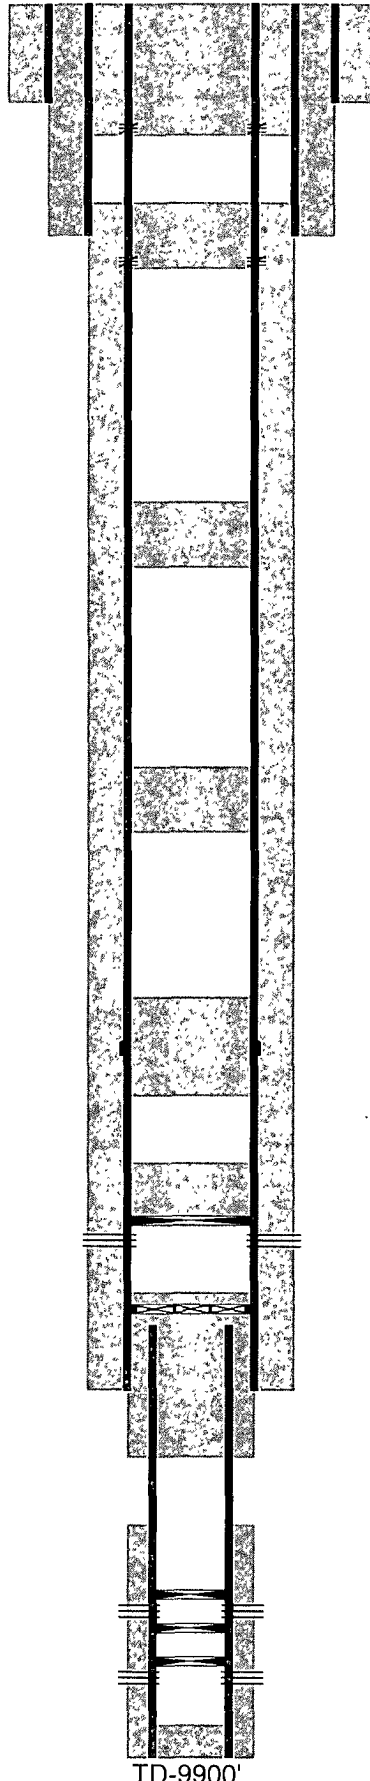

Perf @ 550'

Perf @ 1132'

Perfs @ 7054-7095'

Perfs @ 9115-9230'

Perfs @ 9619-9654'

17-1/2" hole @ 500'
13-3/8" csg @ 500'
w/ 450sx-TOC-Surf-Circ


11" hole @ 1082'
8-5/8" csg @ 1082'
w/ 450sx-TOC-Surf-Circ

7-7/8" hole @ 7822'
5-1/2" csg @ 7822'
w/ 1275sx-TOC-1084'-CBL
DVT @ 6030'

4-3/4" hole @ 9900'
2-7/8" liner @ 7745-9873'
w/ 145sx-TOC-8516'-CBL

TD-9900'

OXY USA Inc. - Current
Lakewood 15 #1
API No. 30-015-33574

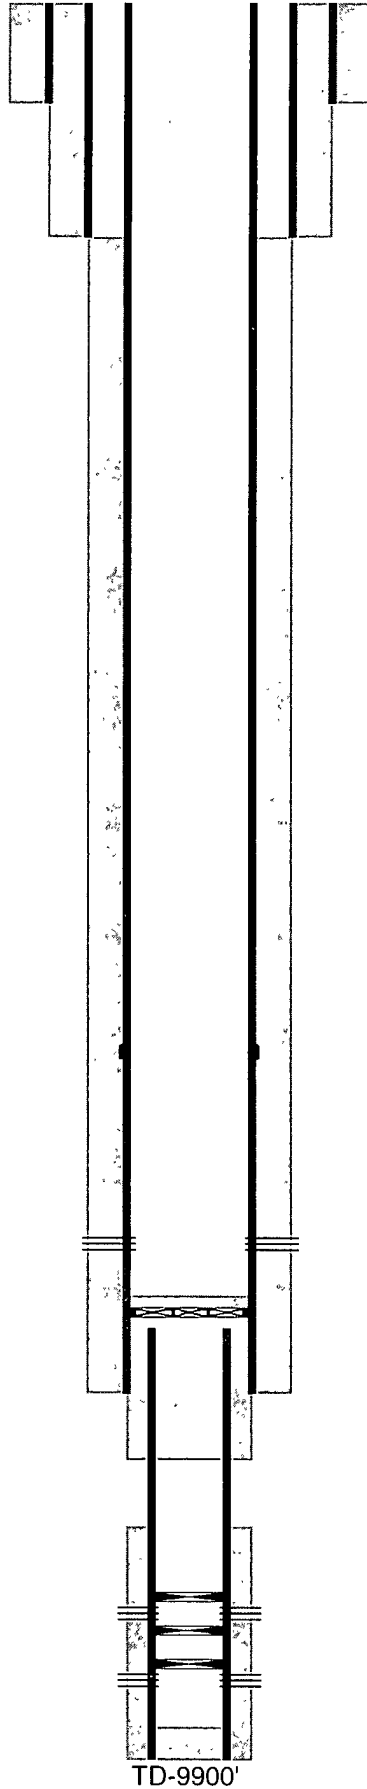

17-1/2" hole @ 500'
13-3/8" csg @ 500'
w/ 450sx-TOC-Surf-Circ

11" hole @ 1082'
8-5/8" csg @ 1082'
w/ 450sx-TOC-Surf-Circ

Perfs @ 7054-7095'

6/05-CR @ 7730', sqz 100sx - PB-7725'

7-7/8" hole @ 7822'
5-1/2" csg @ 7822'
w/ 1275sx-TOC-1084'-CBL
DVT @ 6030'

6/05-CIBP @ 9100' w/ 40' cmt
6/05-CIBP @ 9380' w/ 40' cmt
3/05-CIBP @ 9600' w/ 40' cmt

4-3/4" hole @ 9900'
2-7/8" liner @ 7745-9873'
w/ 145sx-TOC-8516'-CBL

Perfs @ 9115-9230'

Perfs @ 9619-9654'

PB-9840'

TD-9900'