

Subm. Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-22627
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name PARDUE FARMS 26
8. Well Number 1
9. OGRID 241333
10. Pool name or Wildcat DUBLINRANCH; MORROW GAS
11. Elevation (Show whether DR, RKB, RT, GR, etc.)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☐ Gas Well ☒	
2. Name of Operator CHEVRON MIDCONTINENT, L.P.	
3. Address of Operator 15 SMITH ROAD, MIDLAND, TEXAS 79705	
4. Well Location Unit Letter E: 1980 feet from the NORTH line and 660 feet from the WEST line Section 26 Township 23-S Range 28-E NMPM County EDDY.	
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: <u>Morrow</u>		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: PREP WORK FOR RE-ENTRY		OTHER:	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

CHEVRON MIDCONTINENT, L.P. INTENDS TO PLUG THE MORROW RESERVOIR, IN PREPARATION FOR RE-ENTRY TO THE AVALON. PLEASE FIND ATTACHED, THE WELLBORE DIAGRAMS, AND C-144 INFORMATION.

THE INTENDED PROCEDURE IS AS FOLLOWS:

MIRU. Kill well. ND WH. NU BOP.

Release packer. POH W/2 7/8" tbg & on-off tool & pkr. LD.

TIH w/tbg & RBP & set @ 10,000'. Test 9 5/8" csg to 500 psi.

MIRU wireline.

TIH w/CBL. Log 9000-surface.

TIH W/CIBP & set @ 12,350' (or no more than 100' above top perf). Dump bail 35' or 25 sx cmt.

TIH W/CIBP & set @ 12,090. Dump bail 35' or 25 sx cmt.

TIH W/CIBP & set @ 11,410'. Dump bail 35' or 25 sx cmt.

TIH W/CIBP & set @ 11,195. Dump bail 35' or 25 sx cmt.

TIH W/CIBP & set @ 11,015. Dump bail 35' or 25 sx cmt.

TIH W/CIBP & set @ 9,555. Dump bail 35' or 25 sx cmt.



TIH W/CIBP & set @ 6,000'. Test CIBP to 500 psi.

Rig down.

ND BOP. NU WH. RDMO

Spud Date:

Rig Release Date:



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE: Denise Pinkerton TITLE: REGULATORY SPECIALIST DATE: 02-24-2012

Type or print name: DENISE PINKERTON E-mail address: leakejd@cvhewron.com PHONE: 432-687-7375

APPROVED BY: AK Wadde TITLE: Dist. II Secy DATE: 03/03/2012

Conditions of Approval (if any):

Pardue Farms 26 #1 Wellbore Diagram

Created: 12/01/06 By: C. A. Irie
 Updated: By:
 Lease: Pardue Farms 26
 Field: Culebra Bluff South - Morrow
 Surf. Loc.: 1,980' FNL & 660' FWL
 Bot. Loc.:
 County: Eddy St.: NM
 Status: Active Gas Well

Well #: 1 Fd./St. #: Fed
 API: 30-015-22627
 Unit Ltr.: E Section: 26
 TSHP/Rng: S-23 E-28
 Unit Ltr.: Section:
 TSHP/Rng:
 Directions: Carlsbad, NM
 Cheveno: EQ3026

Current

Surface Casing (Not Shown)

Size: 20"
 Wt., Grd.: 94#*
 Depth: 427
 Sxs Cmt: 675
 Circulate: Yes, 40
 TOC: Surface
 Hole Size: 26"
 *1 Jt H-40, 10 Jts K-55

Intermediate Casing (Not Shown)

Size: 13 3/8
 Wt., Grd.: 61# K-55
 Depth: 3,000
 Sxs Cmt: 1,900
 Circulate: No
 TOC: 510' TS
 Hole Size: 17 1/2

Production Casing


Size: 9 5/8
 Wt., Grd.: S-95*
 Depth: 10,400
 Sxs Cmt: 3,260
 Circulate: DV Only
 TOC: 600' TS
 Hole Size: 12 1/4
 DV Tool: 6,313
 *43 Jts 47#, 213 Jts 43.5#

Production Liner 1

Size: 7"
 Wt., Grd.: 26# S-95
 Top: 10,104
 Depth: 12,290
 Sxs Cmt: 650
 Circulate: Yes
 TOC: TOL
 Hole Size:

Production Liner 2

Size: 4 1/2
 Wt., Grd.: 13.5# N-80
 Top: 12,001
 Depth: 13,117
 Sxs Cmt: 130
 Circulate: Yes
 TOC: TOL
 Hole Size:

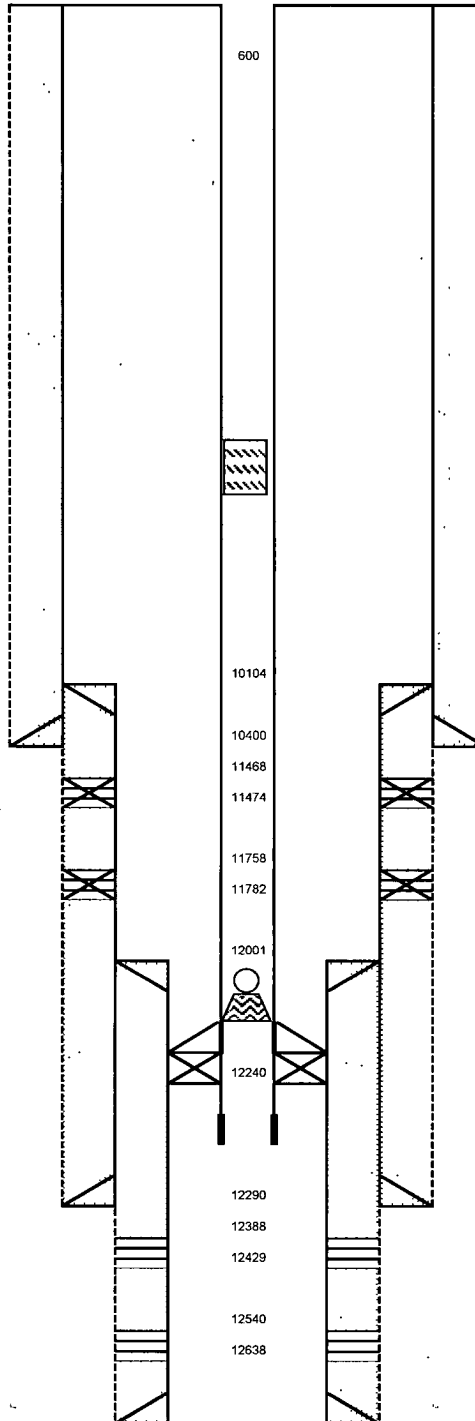

KB: 3,051
 DF:
 GL: 3,026
 Ini. Spud: 09/16/78
 Ini. Comp.: 12/16/78

History

12/16/78 Ini Comp: Bit 12956, RBP 11880, snd 4 sx, tag 11890, hydromite 100#, tag 11840, dual pkr BHA, btm pkr 11640, top pkr 11322, both strings 2 3/8, perf Atoka 4 spf 11758-782, swab, flow, perf Atoka spf 11468-474, flow
 5/17/05 Recomp Morrow: Cmt ret 11607, sqz all perfs 188 sx, tag 10825, DO cmt, test good, CO 11761, rel RBP, tag 12962, drl 13015, polish TOL 4 5, FA liner pkr TOL 4.5, sting pkr, perf Morrow 12540-546, 552-554, 612-618, 630-634, 636-638 (25 hls), frac 50000 gls 70Q 50000# 20/40, CBP 12480, perf Morrow 12388-429, frac 54000 gls 70Q 50000# 20/40, flow, guage 3 65 12610, set down, Baker 10K Hornet Packer 12240, tbg 2 7/8, swab
 11/9/06 Swab
 2/8/07 Inst PL
 9/2007 Inst Comp: 2 Peice

Geology - Tops

Delaware 2,625
 Bone Spring 6,290
 Wolfcamp 9,555
 Penn 11,015
 Strawn 11,195
 Atoka 11,410
 Morrow Lime 12,090
 Morrow Clastics 12,270

Tubing Detail - Not Verified!

2 7/8" 6.4# L-80 Tubing
 8 Jts 2 7/8" 6.4# L-80 Tubing
 2 7/8" X 2 3/8" Crossover
 w/Turned Down Collars
 On/Off Tool w/1.87" F Profile
 Baker 10K Hornet Pkr @ 12,240'
 2 3/8" Tubing Sub
 1.81" R Profile Nipple

Perforations

11468-474, 758-782, 12388-429, 540-546, 552-554, 612-618, 630-634, 636-638

PBTD: 13,015
 TD: 13,117

Pardue Farms 26 #1 Wellbore Diagram

Created: 12/01/06 By: C. A. Irle
 Updated: By:
 Lease: Pardue Farms 26
 Field: Culebra Bluff South - Morrow
 Surf. Loc.: 1,980' FNL & 660' FWL
 Bot. Loc.:
 County: Eddy St.: NM
 Status: Active Gas Well

Well #: 1 Fd./St. #: Fed
 API: 30-015-22627
 Unit Ltr.: E Section: 26
 TSHP/Rng: S-23 E-28
 Unit Ltr.: Section:
 TSHP/Rng:
 Directions: Carlsbad, NM
 Chevno: EQ3026

Proposed

Surface Casing (Not Shown)

Size: 20"
 Wt., Grd.: 94#*
 Depth: 427
 Sxs Cmt: 675
 Circulate: Yes, 40
 TOC: Surface
 Hole Size: 26"
 *1 Jt H-40, 10 Jts K-55

Intermediate Casing (Not Shown)

Size: 13 3/8
 Wt., Grd.: 61# K-55
 Depth: 3,000
 Sxs Cmt: 1,900
 Circulate: No
 TOC: 510' TS
 Hole Size: 17 1/2

Production Casing


Size: 9 5/8
 Wt., Grd.: S-95*
 Depth: 10,400
 Sxs Cmt: 3,260
 Circulate: DV Only
 TOC: 600' TS
 Hole Size: 12 1/4
 DV Tool: 6,313
 *43 Jts 47#, 213 Jts 43.5#

Production Liner 1

Size: 7"
 Wt., Grd.: 26# S-95
 Top: 10,104
 Depth: 12,290
 Sxs Cmt: 650
 Circulate: Yes
 TOC: TOL
 Hole Size:

Production Liner 2

Size: 4 1/2
 Wt., Grd.: 13.5# N-80
 Top: 12,001
 Depth: 13,117
 Sxs Cmt: 130
 Circulate: Yes
 TOC: TOL
 Hole Size:

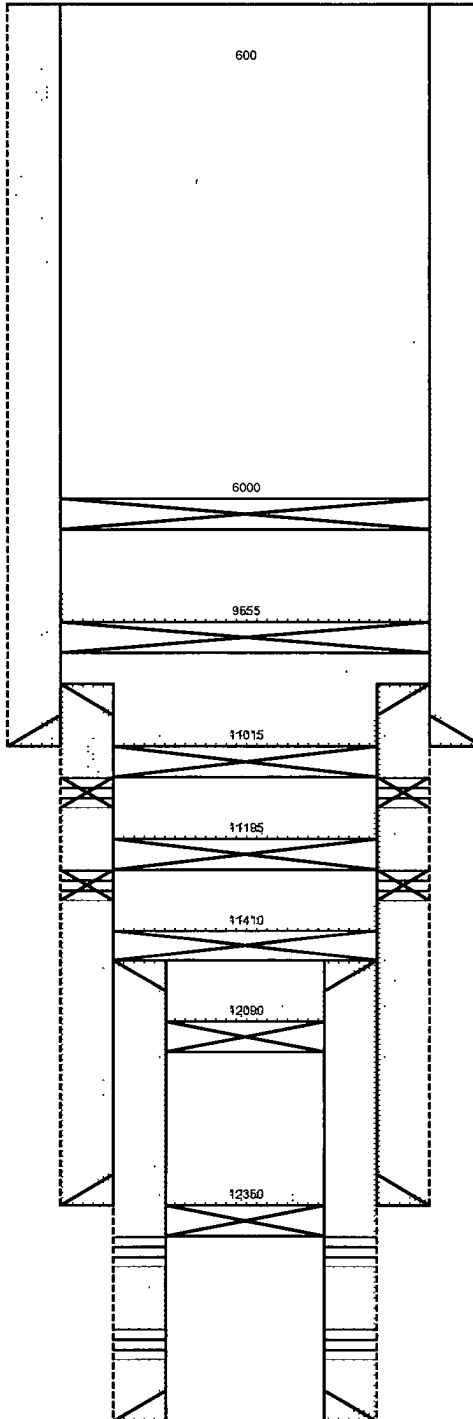

KB: 3,051
 DF:
 GL: 3,026
 Ini. Spud: 09/16/78
 Ini. Comp.: 12/16/78

History

12/16/78 Ini Comp. Bit 12956, RBP 11880, snd 4 sx, tag 11890, hydromite 100#, tag 11840, dual pkr BHA, btm pkr 11640, top pkr 11322, both strings 2 3/8, perf Atoka 4 spf 11758-782, swab, flow, perf Atoka spf 11468-474, flow.
 5/17/05 Recompr Morrow Cmt ret 11607, sqz all perfs 188 sx, tag 10825, DO cmt, test good, CO 11761, rel RBP, tag 12962, dnl 13015, polish TOL 4.5, FA liner pkr TOL 4.5, sting pkr, perf Morrow 12540-546, 552-554, 612-618, 630-634, 636-638 (25 hls), frac 50000 gls 70Q 50000# 20/40, CBP 12480, perf Morrow 12388-429, frac 54000 gls 70Q 50000# 20/40, flow, guage 3.65 12610, set down, Baker 10K Hornet Packer 12240, tbg 2 7/8, swab
 11/9/06 Swab
 2/8/07 Inst PL
 9/2007 Inst Comp: 2 Peice

Geology - Tops

Delaware 2,625
 Bone Spring 6,290
 Wolfcamp 9,555
 Penn 11,015
 Strawn 11,195
 Atoka 11,410
 Morrow Lime 12,090
 Morrow Clastics 12,270

PBTD: 13,015
 TD: 13,117