

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No 1004-0137  
Expires: March 31, 2007

## SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.


**SUBMIT IN TRIPLICATE- Other instructions on reverse side.**

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. NMNM0545035
2. Name of Operator OXY USA Inc. 16696		6. If Indian, Allottee or Tribe Name
3a. Address P.O. Box 50250 Midland, TX 79710	3b. Phone No. (include area code) 432-685-5717	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 330FWL 2460FWL NENW(C) 395FWL 370FWL NWNW(D) Sec 29 T23S R31E		8. Well Name and No. Federal 29 #5
		9. API Well No. 32015- 37337
		10. Field and Pool, or Exploratory Area Sand Dunes Delaware, West
		11. County or Parish, State Eddy, NM

## 12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input checked="" type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input checked="" type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)



See Attached

SEE ATTACHED FOR  
CONDITIONS OF APPROVALAccepted for record  
NMOCD

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed) David Stewart		Title Regulatory Advisor
Signature 	Date 9/28/11	APPROVED NOV 12 2011  WESLEY W. INGRAM PETROLEUM ENGINEER
THIS SPACE FOR FEDERAL OR STATE OFFICE USE		
Approved by Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Title Office	
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.		

(Instructions on page 2)

**Federal 29 #5**  
**API No. 30-015-37337**


TD-8605'M 7993'V    PBTD-8477'M 7875'V    Perfs-8315-8325'

11-3/4" 42# @ 425' w/ 350sx, 14-3/4" hole, TOC-Surface-Circ  
8-5/8" 32# @ 4023' w/ 1130sx, 10-5/8" hole, TOC-Surface-Circ  
5-1/2" 17# @ 8605' DVT's @ 5915, 4113' w/ 1570sx, 7-7/8" hole, TOC-Surf-Circ

**Procedure:**

1. Clean location & set anchors
2. RU DDPU, POOH w/ rods and pump. NDWH, NU BOP.
3. POOH w/ tubing, ND BOP and NU Frac Valve, RD DDPU.
4. RU WL UNIT and RIH w/ Composite BP and set above existing perfs @ 8315-8325'.
5. Perforate 1 JSPF @ in 4 stages @ 8272-7936, 7850-7702, 7514-7332, 7176-6958, 6692-6425' w/ 4" Titan SDP EXP 4039-321T 38.5 gram charge w/ .43" EHD and 55" penetration on 90 degree phasing. RD WLU.
6. Frac well down casing at first available date per Halliburton frac procedure.
7. RU WLU and set Composite BP between stages.
8. Shut well in overnight and RD Frac equipment and WLU.
9. MI RUPU, ND Frac valve, NU BOP.
10. PU tubing and RIH with bit and drill out Composite BP's to PBTD.
11. RIH w/ tbg & pkr, swab & flow well until sand cleans up.
12. POOH & RIH W/ production BHA as directed
13. Test well into battery

OXY USA Inc.  
Federal 29 #5  
API No. 30-015-37337

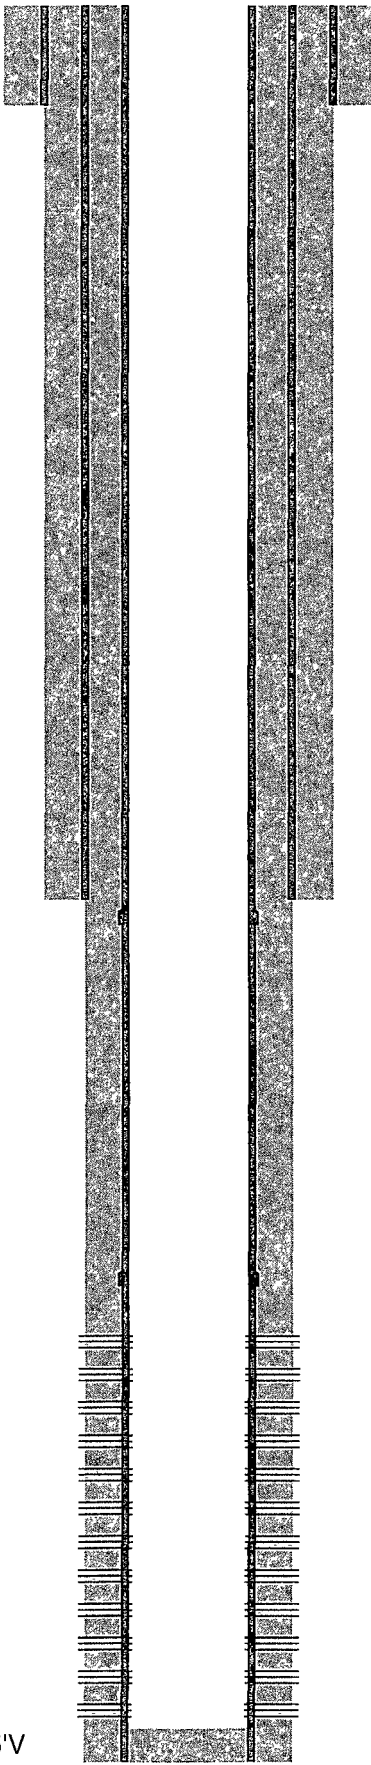

14-3/4" hole @ 425'  
11-3/4" csg @ 425'  
w/ 350sx-TOC-Surf-Circ

10-5/8" hole @ 4023'  
8-5/8" csg @ 4023'  
w/ 1130sx-TOC-Surf-Circ

7-7/8" hole @ 8605'  
5-1/2" csg @ 8605'  
DVT's @ 5915', 4113'  
w/ 1570sx-TOC-Surf-Circ

***Perfs @ 6425-8272'***

Perfs @ 8315-8325'

PB-8477'M 7875'V

TD-8605'M 7993'V

**Federal 29 5**  
**OXY USA Inc.**  
**November 12, 2011**  
**Conditions of Approval**

- 1. Surface disturbance beyond the originally approved pad must have prior approval.**
- 2. Closed loop system required.**
- 3. Operator to have H2S monitoring equipment on location.**
- 4. A minimum of a 3000 (3M) BOP to be used. All blowout preventer (BOP) and related equipment (BOPE) shall comply with reasonable well control requirements. A two ram system with a blind ram and a pipe ram designed for the size of the work string shall be adequate. Tapered work strings will require an additional pipe ram. The manifold shall comply with Onshore Oil and Gas Order #2 Attachment I (3M Diagrams of Choke Manifold Equipment). The accumulator system shall have an immediately available power source to close the rams and retain 200 psi above pre-charge. The pre-charge test shall follow requirements in Onshore Order #2.**
- 5. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of work over operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.**
- 6. Operator limited to 3700 psi on the frac down the casing. This is based on 70% of the 5.5" 17# J-55 casing's burst rating.**
- 7. Operator to submit a subsequent sundry with details of work performed including a new well test. Due to classification as one pool under order R-10086, no completion report is required.**

**WWI 111211**