

30015 43326

WELL NAME: CROW FEDERAL COM 504

API: 30-015-43326

SPUD DATE: 10/22/2015

PRODUCING FORMATION: YESO PADDOCK

FIELD: CEDAR LAKE (BP)

COUNTY: EDDY

STATE: NEW MEXICO

WORKING INTEREST: 60.00%

SURFACE LOC: 1100' FNL & 515' FWL

SECTION: 9

TOWNSHIP: 17-S

RANGE: 31-E

SURVEY: RONALD J. EIDSON

SECTION: 9

TOWNSHIP: 17-S

RANGE: 31-E

SURVEY: RONALD J. EIDSON

DRILL RIG: CAPSTAR 114

RIG RELEASE: 10/15/2015

KB (ft): 3,886.00

GL (ft): 3,875.00

KB/GL DIFF (ft): 11.00

TMD (ft): 9,472.00

TD OF PILOT HOLE (ft): N/A

FC DEPTH (ft): 9,436.00

PBMD (ft): 9,472.00

RDV DEPTH (ft): N/A

ORIO VALVE (ft): N/A

DEEPEST TVD (ft): 5,198.00


TAPERED CASING STRING:

7" 29# L-80 TO X-OVER @ 4,647'
TAPERING TO 5.5" 20# L-80 SET @ 9,445'

KOP (ft): 4,583
LATERAL LENGTH (ft): 4,098
TD OF PILOT HOLE (ft): N/A

PACKERS & SLEEVES
TOP PERF (MD): 5,374
BOTTOM PERF (MD): 9,436

TMD (ft): 9,472
FC DEPTH (ft): 9,436
PBMD (ft): 9,472
RDV DEPTH (ft): N/A
ORIO VALVE (ft): N/A

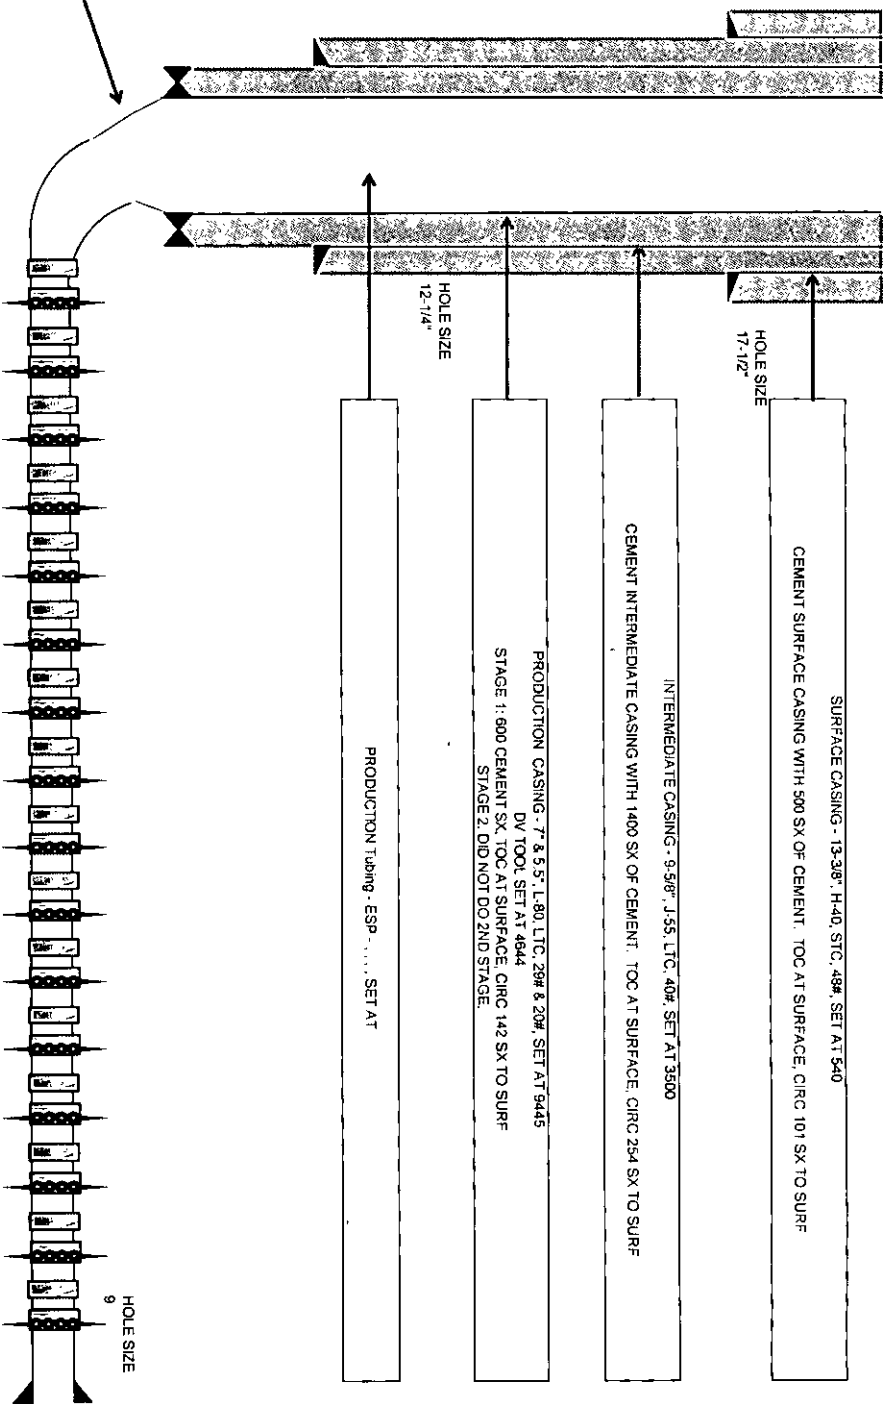

LAST UPDATED BY: HILLARI GOULD
LAST UPDATED: 4/27/2016

COMPLETION:					
STIMULATION:					
STATUS:					
COMMENTS:					
PACKERS & SLEEVES - 15 STAGES					
TOTAL ACID (bb)	65.359	TOTAL LTR (bb)	2,850.520	MAX WH RATE (bpm)	95.00
PRODUCTION METHOD	Pumping	LIFT TYPE	ESP	SETTING DEPTH	0
CROSSOVER SUB @ 4,647'					