

OCD

30-015-21711

PAR FIVE
ENERGY SERVICES LLC

DESIGN - EXECUTE - EVALUATE - REPORT

PRODUCTION

NM OIL CONSERVATION
ARTESIA DISTRICT

DEC 20 2016

RECEIVED

Ray Westall Operating, Inc

DHY A SWD #1

EDDY, NM

PRIMARY PUMP:

2014

SECONDARY PUMP:

PREPARED BY: TRAVIS KELSEY

SERVICE SUPERVISOR

ARTESIA DISTRICT

1-575-748-8610

10/26/2016

WELL SUMMARY



COMPANY NAME:	Ray Westall Operating, Inc	DATE:	10/26/2016
LEASE NAME:	DHY "A" SWD	OPERATOR NAME:	
WELL NUMBER:	1	TICKET NUMBER:	5844
API NUMBER:	30-015-21711	AFE NUMBER:	
SECTION: 15	TOWNSHIP: 19S	RANGE: 28E	
COUNTY: EDDY	STATE: NEW MEXICO		
RIG NAME:	COMPANY REP: DONNIE MATHEWS	PHONE#:	575-626-4344

DIRECTIONS

US82 EAST to CR204 to CR206 SOUTH to CR235 Curry Combs turn LEFT and follow to CR246 Millman Rd turn RIGHT and follow 1/2 mile past the end of the pavement turn RIGHT (thru an Apache location) to location.

NOTES

UPDATED BY DOLLAR 10/25

HSE

PROPER PPE

JOB PROCEDURE

TEST LINES

PUMP 20 BBLS OF CHEMICAL WASH (200# SAPP & 5 GALLONS PLEXAID 803)

PUMP 20 BBLS OF GEL (200# PF-182)

PUMP 800 SACKS OF LEAD CMT @ 11.9#

PUMP 100 SACKS OF TAIL CMT @ 15.6#

SHUT DOWN, WASH-UP, AND DROP PLUG

PUMP CALCULATED DISPLACEMENT

WELL SUMMARY



WELL / CASING DATA									
JOB TYPE: PRODUCTION					HOLE SIZE: 7.875				
TVD: 9523					PREVIOUS CASING SIZE: 8.625				
PREVIOUS CASING LB/FT: 24					PREVIOUS CASING DEPTH: 2800				
CASING SIZE: 5.5									
CASING LB/FT: 17					CASING GRADE: N-80				
FLOAT COLLAR DEPTH: 9486.97					SHOE JOINT LENGTH: 36.77				
DV TOOL DEPTH:					SECOND DV TOOL DEPTH:				
TOTAL DEPTH: 9523					TOTAL CASING : 9523				
TUBULAR DATA									
TBG/D.P. SIZE: 2 7/8					TBG/D.P. DEPTH:				
TBG/D.P. LB/FT: 6.5					TOOL DEPTH:				
PACKER OR RETAINER:					PERF/HOLE DEPTH:				
SURFACE EQUIPMENT									
CEMENT HEAD SIZE: 5.5					QUICK CONNECT SIZE: 5.5				
DRILL PIN SIZE/TYPE:					THREAD: 8-ROUND				
TUBING SWEDGE SIZE: 2 7/8					TAKE 2 -2 INCH REGULAR TUBING SWEDGES				
CHEMICALS NEEDED									
300# SUGAR									
400# SAPP									
10 GALLONS PLEXAID 803									
EQUIPMENT									
SUPERVISOR: Travis Kelsey					FIELD REPRESENTATIVE: Anthony Granados				
PUMP OPERATOR: Alfred Perches					UNIT NUMBER: 1027/2014				
E/O: Jose Velasquez					UNIT NUMBER: 1011				
E/O: Juan Quintero					UNIT NUMBER: 1021/2006				
E/O: Rogelio Alvarez					UNIT NUMBER:				
E/O:					UNIT NUMBER:				
FLUID DATA									
1ST SLURRY:		50/50 Poz/H + 5% (BWOW) PF44 Salt + 10% PF20 Bentonite + .2% PF153 Antisettling Agent + 3 pps PF42 Kol-Seal + .4 pps PF45 Defoamer + .125 pps PF29 Cellophane							
DENSITY:	11.9	YIELD:	2.47	MIX H2O:	13.845	SACKS:	800		
2ND SLURRY:		H + .2% PF13 Retarder							
DENSITY:	15.6	YIELD:	1.18	MIX H2O:	5.216	SACKS:	100		
3RD SLURRY:									
DENSITY:		YIELD:		MIX H2O:		SACKS:			
4TH SLURRY:									
DENSITY:		YIELD:		MIX H2O:		SACKS:			
5TH SLURRY									
DENSITY:		YIELD:		MIX H2O:		SACKS:			
DISPLACEMENT TYPE :		FW		DISPLACEMENT VOLUME:		220		MUD WEIGHT:	N/A

JOB LOG

PAR FIVE
ENERGY SERVICES LLC


[illegible]

PAR FIVE


[illegible]

Start

RAYWESTALL_DHYASWD1_PLUG_2014_ALFRED

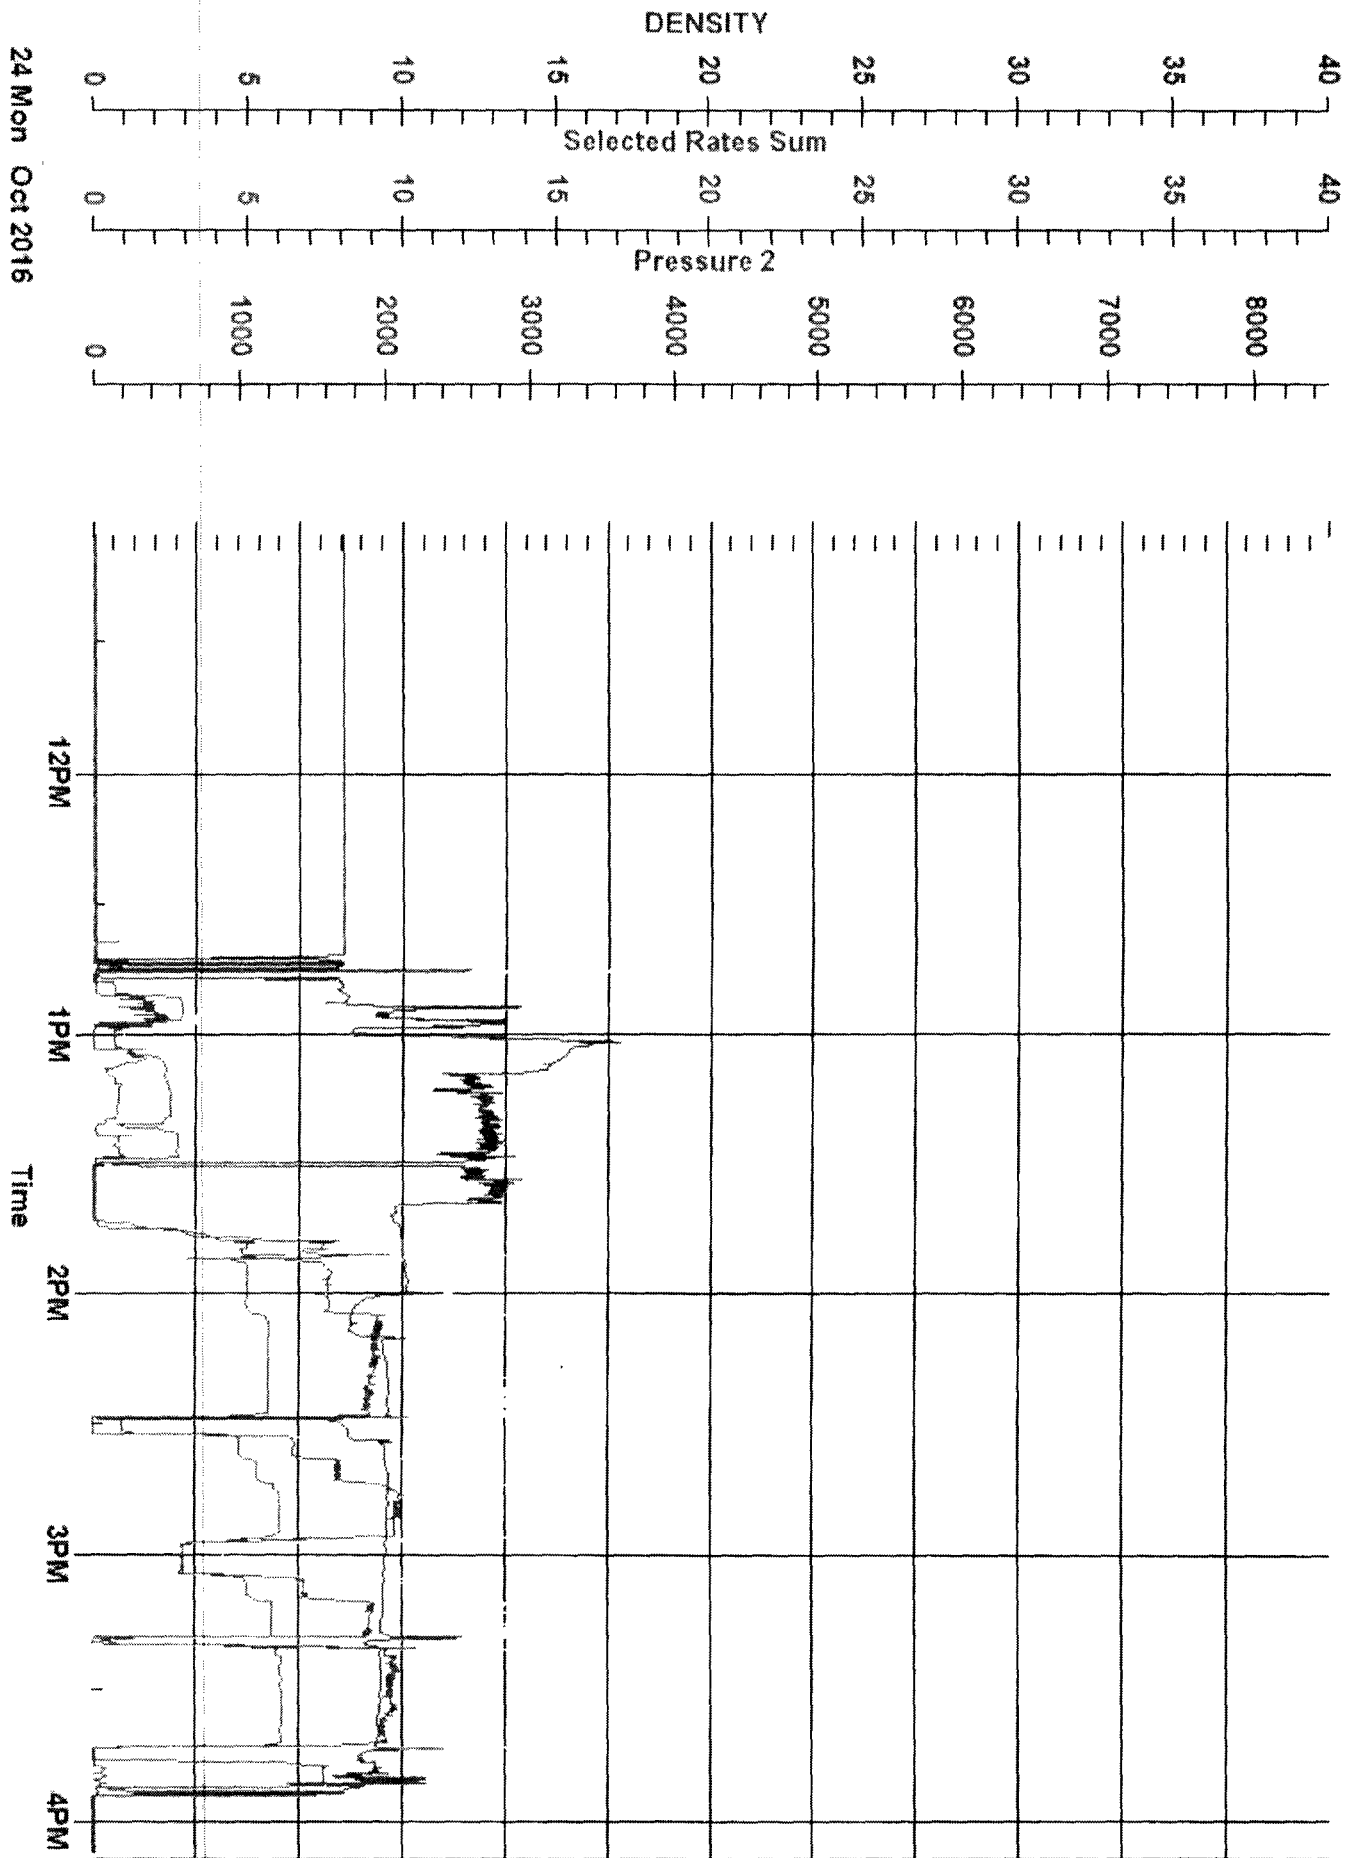

RAYWESTALL_DHYASWD1_RECEMENT_2014_ALFRED

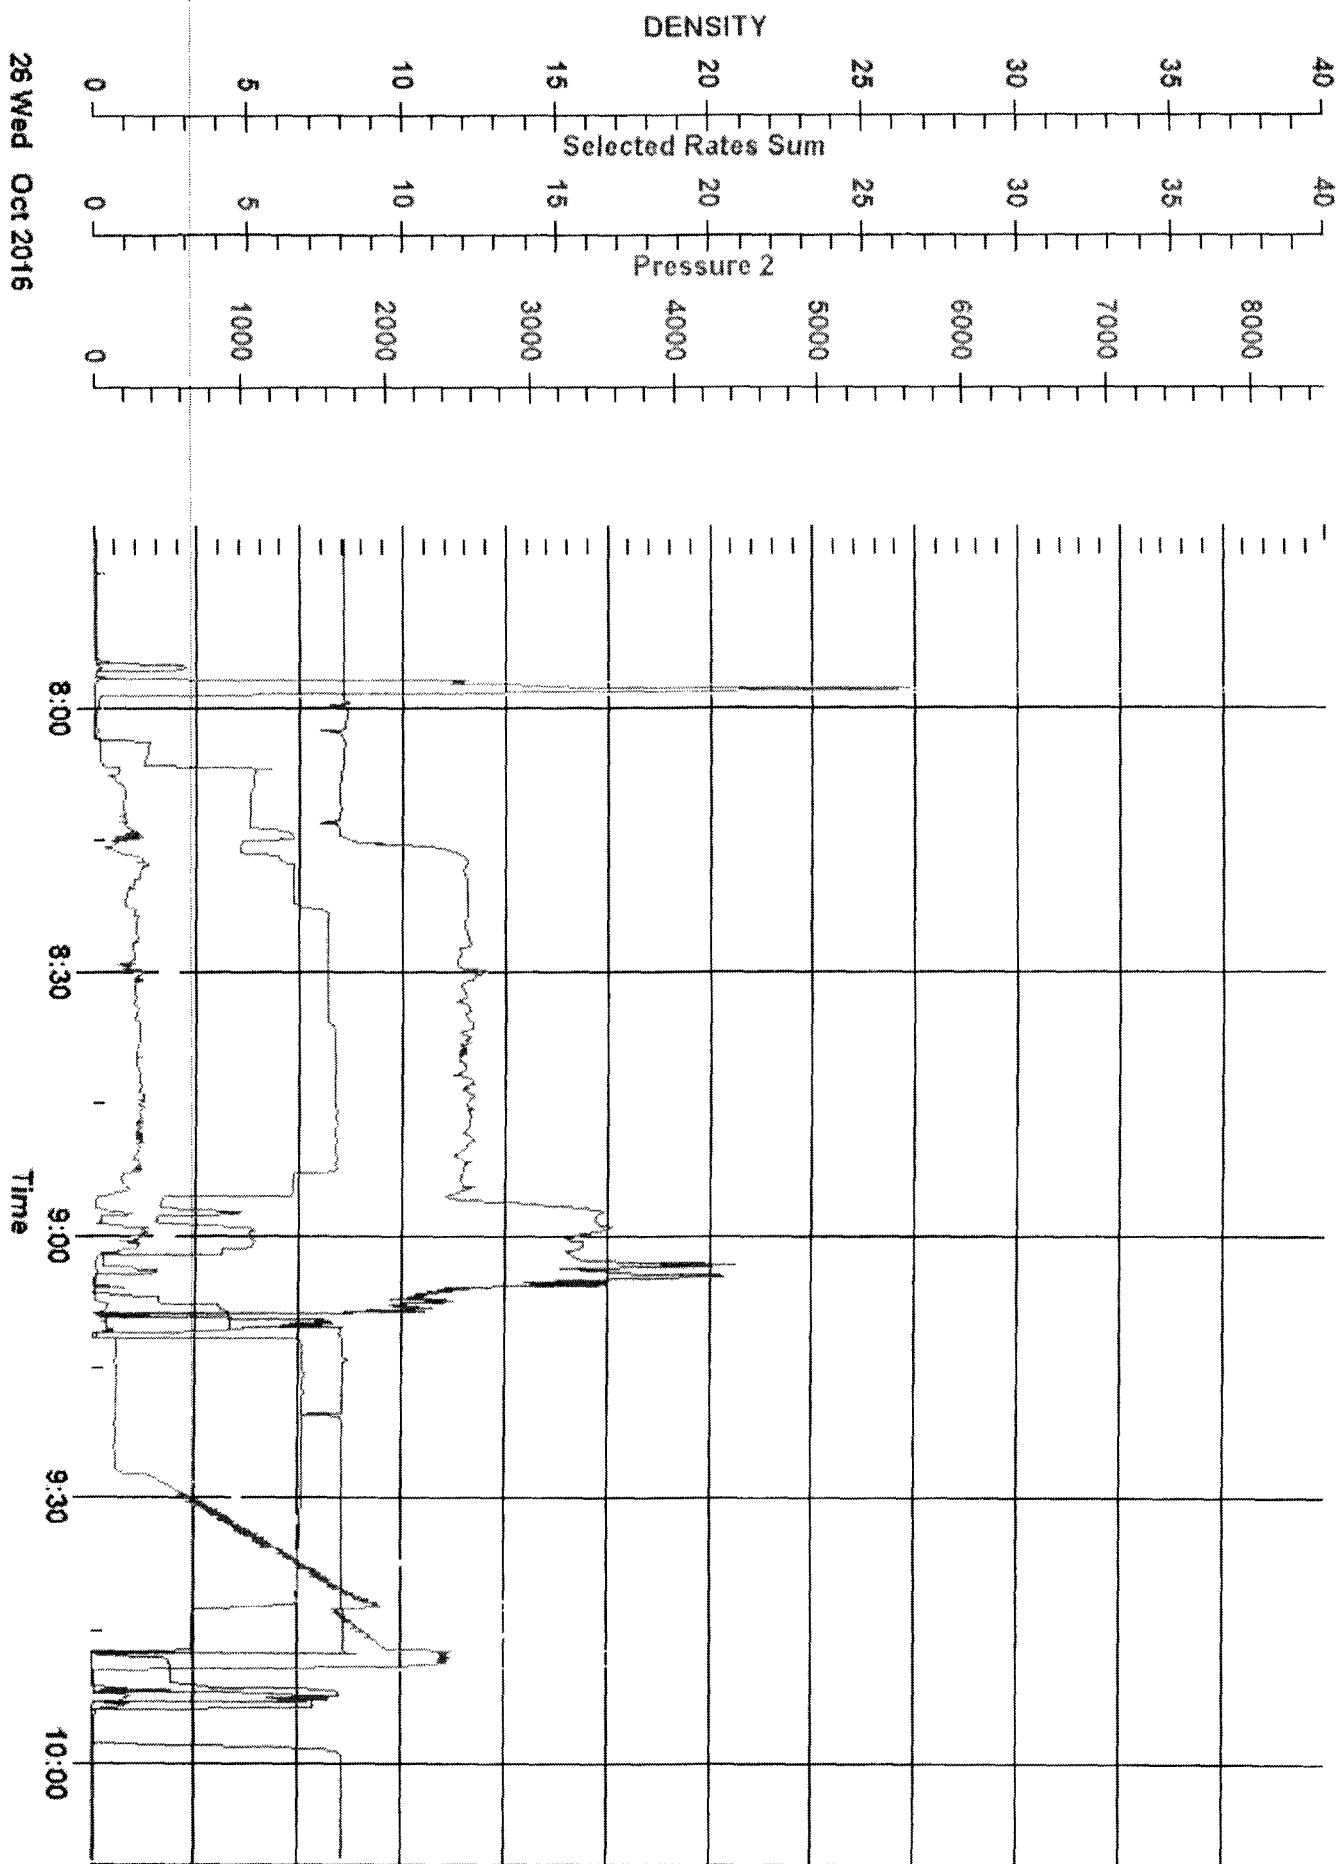

26 Wed Oct 2016

[illegible]