## **UNITED STATES** DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

Operator

FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018

SUNDRY NOTICES AND REPORTS ON WELLS  Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.					NMNM88139 6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE - Other Instructions on page 2					7. If Unit or CA/Agreement, Name and/or No.	
1. Type of Well Gas Well Gother					8. Well Name and No WOOD DRAW 35 FEDERAL 1	
Name of Operator Contact: DAVID STEWART     OXY USA INCORPORATED E-Mail: david_stewart@oxy.com					9. API Well No. 30-015-34967-00-S1	
3a. Address 5 GREENWAY PLAZA SUITE 110 HOUSTON, TX 77048-0521			nclude area code) 573 ONSER TESIA DISTR		10. Field and Pool or Exploratory Area CORRAL CANYON	
4. Location of Well (Footage, Sec., T. Sec 35 T24S R29E SWSE 33	DEC 11 2018			11. County or Parish, State  EDDY COUNTY, NM		
12. CHECK THE AF	PROPRIATE BOX(ES)	TO INDICAT	RECEIVED	NOTICE,	REPORT, OR OT	THER DATA
TYPE OF SUBMISSION	TYPE OF ACTION					
Alter Casing   Hydraulic Fracturing   Reclamation   We						ntinent markers and zones. be filed within 30 days 1160-4 must be filed once ed and the operator has OF RECORD
1. RIH & set CIBP @ 5286' w/ 25sx cmt to 5136' 55 2. M&P 25sx cmt @ 3270-3420' WOC-Tag 3000. Do not combine Steps 2 & 3 (B/salt & Jal) 3. Perf @ 2980' saz 40sx cmt to 2860' WOC-Tag 50 2 Perf @ 2476' saz 46sx cmt to 2350' WOC-Tag 25 22 - 2390 Add for to 900 502 2 and to 5. Perf @ 550' saz 210sx cmt to Surface 10# MLF between plugs - Above ground steel tanks will be utilized  14. I hereby certify that the foregoing is true and correct.  Electronic Submission #435131 verified by the BLM Well Information System For OXY USA INCORPORATED, sent to the Cartebad						
Committed to AFMSS for processing by PRI Name(Printed/Typed) DAVID STEWART			Title REGULATORY ARYSPRICHED FOR			
Signature (Electronic	Submission)		Date 09/13/20 CONDITIONS OF APPROV			F APPROVAL
THIS SPACE FOR FEDERAL OR STATE OFFICE USE						
Approved By	Title Soe	AV. PE		9-22-18 Date		
Conditions of approval, if any, are attached certify that the applicant holds legal or eq which would entitle the applicant to cond	Office Ca	khed	Field De	Hice		

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\*

Received from operator. Never received from Ben Believed from operator. Never received from Ben 12-11-18

OXY USA Inc. - Proposed Wood Draw 35 Federal #1 API No. 30-015-34967

210sx @ 650'-Surface

30 sx@900-800 WOC-Tag

12-1/4" hole @ 500' 8-5/8" csg @ 500' w/ 400sx-TOC-Surf-Circ

Perf @ 550'

Pent@900'

50 2522 **40**sx **@ 2475-235**0' WOC-Tag

40sx € 2990-2860' WOC-Tag

528sx @ 3270-3120' WOC-Tag

Perf @ 8475' 2522

Perf @ 2990'


CIBP @ 5286' w/ 25sx to 5135'

PB-5489'

7-7/8" hole @ 5537' 5-1/2" csg @ 5537' w/ 1900sx-TOC-3000'-CBL

Perfs @ 5336-5356

OXY USA Inc. - Current Wood Draw 35 Federal #1 API No. 30-015-34967

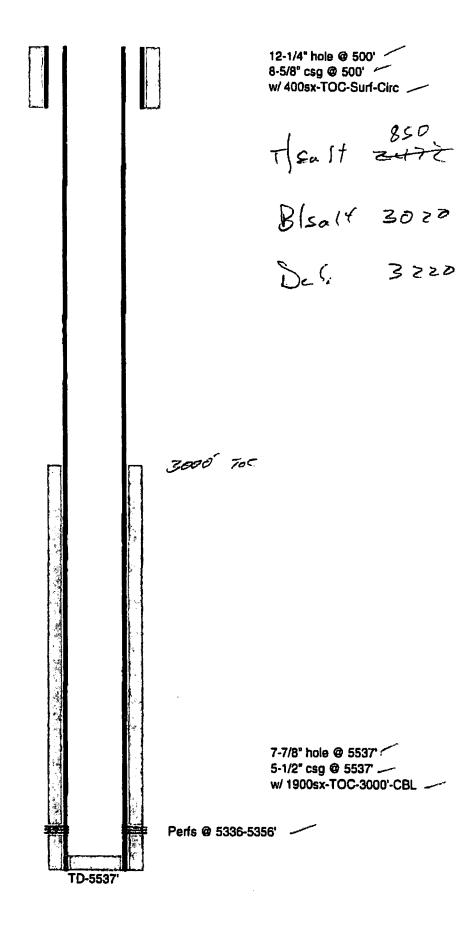

PB-5489'

## BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

## Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. Notification: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

- 'Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.
  - 6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

- 7. Subsequent Plugging Reporting: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. Show date well was plugged.
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.