

Submit 3 Copies To Appropriate District Office
District I
1625 N French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505



Form C-103
May 27, 2004

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	WELL API NO. 30-015-30869
2. Name of Operator Nearburg Producing Company	5. Indicate Type of Lease STATE ☐ FEE ☐
3. Address of Operator 3300 N A St., Bldg 2, Ste 120, Midland, TX 79705	6. State Oil & Gas Lease No.
4. Well Location Unit Letter <u>A</u> : <u>2310</u> feet from the <u>North</u> line and <u>990</u> feet from the <u>East</u> line Section <u>27</u> Township <u>19S</u> Range <u>25E</u> NMPM County <u>Eddy</u>	7. Lease Name or Unit Agreement Name: South Boyd 27
	8. Well Number 10H
	9. OGRID Number 015742
	10. Pool name or Wildcat North Seven Rivers; Glorietta/ Yeso
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3439	
Pit or Below-grade Tank Application ☐ or Closure ☐	
Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____	
Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
PLUG AND ABANDON ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	COMMENCE DRILLING OPNS. ☐
CHANGE PLANS ☒	PULL OR ALTER CASING ☐
MULTIPLE COMPLETION ☐	PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐	OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please see attached current well bore diagram as off 12/2/05. Also attached is a proposed post diagram with changes due to work performed in 2005.

Expect to move to well to plugback 1/14/08.

JAN - 8 2008
OCD-ARTESIA

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐ , a general permit ☐ or an (attached) alternative OCD-approved plan ☐

SIGNATURE Sarah Jordan TITLE Production Analyst DATE 1/7/08

Type or print name Sarah Jordan E-mail address: sjordan@nearburg.com Telephone No. 432/686-8235

For State Use Only
BRYAN G. ARANT
DISTRICT II GEOLOGIST

APPROVED BY _____ TITLE _____ DATE JAN 09 2008

Conditions of Approval, if any:

CURRENT WELLBORE DIAGRAM

LEASE: <u>South Boyd 27</u>	WELL: <u>10</u>	FIELD: <u>Dagger Draw North</u>	API: <u>30015308690000</u>
LOC: <u>510' FNL and 990' FEL</u>	SEC: <u>27</u>	BLK: <u></u>	PARS NO: <u></u>
SVY: <u>T19S, R25E</u>	GL: <u>3,443'</u>	CTY/ST: <u>Eddy County, NM</u>	SPUD: <u>12/19/1999</u>
CURRENT STATUS: <u>Inactive (SI)</u>	KB: <u>3,459'</u>	DF: <u></u>	TD DATE: <u>1/9/2000</u>
			COMP. DATE: <u>2/15/2000</u>

FRESH WATER
DEPTH:

HOLE SIZE: 14 3/4"
SURF CSG & SIZE: 9 5/8" 36 & 48# J55
SET @: 1,101'
SXS CMT: 1,200 sx
CIRC: yes 150 sx
TOC AT: surface
TOC BY:

COMMENTS:

*****GEOLOGY*****

TOPS OF ALL ZONES
PRODUCTIVE OF HYDRO-
CARBONS:
San Andres:
Glorieta: 2283'
Bone Springs: 3838'
Wolfcamp: 6608'
Canyon: 7745'

CURRENT PERFS:

7,748'-7,818'

SQUEEZE JOBS:

TBG: 2 7/8"
JTS: 0
SN: N
TAC: N
ROD SIZE N

PKR: N
TYPE:

35 sks cmt Est TOC @ 7,645'
CIBP set @ 7,690' on 12/2/2005
squeeze perfs 7,755-57'
perfs 7,748-818'

OH ID:
COTD:
PBTID: 8,090'
TD: 8,175'

PBTID - 8,090'

HOLE SIZE: 8 3/4"
PROD. CSG & SIZE: 7" 23, 26, & 29# J55, N80, & S95
SET @: 8,175'
SXS CMT: 275 sx
CIRC: no
TOC AT: 7,780'
TOC BY: CBL

BY: MTJ
1/7/2008

OPEN HOLE:

LINER:

Post Plug Back WELLBORE DIAGRAM

LEASE: South Boyd 27	WELL: 10	FIELD: Dagger Draw North	API: 30015308690000
LOC: 510' FNL and 990' FEL	SEC: 27	BLK:	PARS NO:
SVY: T19S, R25E	GL: 3,443'	CTY/ST: Eddy County, NM	SPUD: 12/19/1999
CURRENT STATUS: Inactive (SI)	KB: 3,459'	DF:	TD DATE: 1/9/2000
			COMP. DATE: 2/15/2000

FRESH WATER
DEPTH:

HOLE SIZE: 14 3/4"
SURF CSG & SIZE: 9 5/8" 36 & 48# J55
SET @: 1,101'
SXS CMT: 1,200 sx
CIRC: yes 150 sx
TOC AT: surface
TOC BY:

COMMENTS:

*****GEOLOGY*****

TOPS OF ALL ZONES
PRODUCTIVE OF HYDRO-
CARBONS:
San Andres:
Glorieta: 2283'
Bone Springs: 3838'
Wolfcamp: 6608'
Canyon: 7745'

CURRENT PERFS:

7,748'-7,818'

SQUEEZE JOBS:

TBG: 2 7/8"
JTS: 0
SN: N
TAC: N
ROD SIZE N

PKR: N
TYPE:

OH ID:
COTD:
PBSD: 8,090'
TD: 8,175'

3700'
Cmt Rtn @ ~~3700'~~ cmt to surface
3725'
Perf 4SPF @ ~~3700'~~ *3725'*
3750' w/35' BP
CIBP @ ~~3700'~~ *3750'*
Est TOC @ 6,525' (annulus)
Cmt Rtn @ 6,600' cmt w/40 sks
Perf 4SPF @ 6,625'
CIBP @ 6,650'

35' cmt Est TOC @ 7,645'
CIBP set @ 7,690' on 12/2/2005
squeeze perfs 7,755-57'
perfs 7,748-818'

PBSD - 8,090'

HOLE SIZE: 8 3/4"
PROD. CSG & SIZE: 7" 23, 26, & 29# J55, N80, & S95
SET @: 8,175'
SXS CMT: 275 sx
CIRC: no
TOC AT: 7,780'
TOC BY: CBL

BY: HRW
1/7/2008


OPEN HOLE:

LINER:

CURRENT WELLBORE DIAGRAM

LEASE: <u>South Boyd 27</u>	WELL: <u>10</u>	FIELD: <u>Dagger Draw North</u>	API: <u>30015308690000</u>
LOC: <u>510' FNL and 990' FEL</u>	SEC: <u>27</u>	BLK: <u></u>	PARS NO: <u></u>
SVY: <u>T19S, R25E</u>	GL: <u>3,443'</u>	CTY/ST: <u>Eddy County, NM</u>	SPUD: <u>12/19/1999</u>
CURRENT STATUS: <u>PB before Yeso</u>	KB: <u>3,459'</u>	DF: <u></u>	TD DATE: <u>1/9/2000</u>
			COMP. DATE: <u>2/15/2000</u>

FRESH WATER
DEPTH:

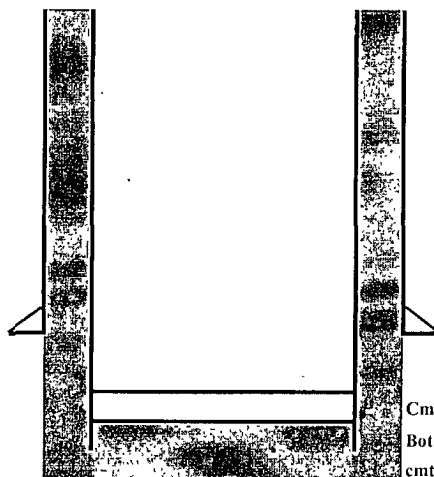


HOLE SIZE: 14 3/4"
SURF CSG & SIZE: 9 5/8" 36 & 48# J55
SET @: 1,101'
SXS CMT: 1,200 sx
CIRC: yes 150 sx
TOC AT: surface
TOC BY:

COMMENTS:

*****GEOLOGY*****

TOPS OF ALL ZONES
PRODUCTIVE OF HYDRO-
CARBONS:
San Andres:
Glorieta: 2283'
Bone Springs: 3838'
Wolfcamp: 6608'
Canyon: 7745'




Cmt plug t/5,655' t/5,555'

CURRENT PERFS:
7,748'-7,818'

SQUEEZE JOBS:

TBG: 2 7/8"
JTS: 0
SN: N
TAC: N
ROD SIZE N

PKR: N
TYPE:

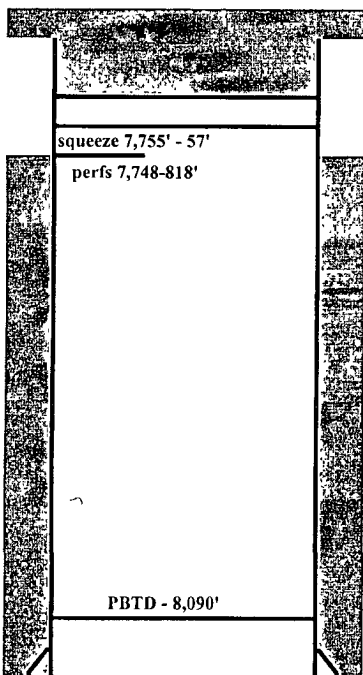

Top of 7" csg w/50' cmt in & above

CIBP @ 7,700' w/35' cmt

OH ID:
COTD:
PBTD: 8,090'
TD: 8,175'

HOLE SIZE: 8 3/4"
PROD. CSG & SIZE: 7" 23, 26, & 29# J55, N80, & S95
SET @: 8,175'
SXS CMT: 275 sx
CIRC: no
TOC AT: 7,780'
TOC BY: CBL

BY: MTJ
10/18/2007

OPEN HOLE:

LINER: