

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☐ SWD		7. Lease Name or Unit Agreement Name Eddy SWD
2. Name of Operator Yates Petroleum Corporation		8. Well Number 1
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210		9. OGRID Number 025575
4. Well Location Unit Letter <u>E</u> : <u>2230</u> feet from the <u>North</u> line and <u>660</u> feet from the <u>West</u> line Section <u>16</u> Township <u>23S</u> Range <u>28E</u> NMPM <u>Eddy</u> County		10. Pool name or Wildcat N. Loving Atoka
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3021' GR		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK	☐	PLUG AND ABANDON	☒
TEMPORARILY ABANDON	☐	CHANGE PLANS	☐
PULL OR ALTER CASING	☐	MULTIPLE COMPL	☐
DOWNHOLE COMMINGLE	☐		

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐


OTHER: ☐ OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU WSU. Rig up any safety equipment as needed. No casing recovery will be attempted.
2. Spot a 70 sx class "C" cement plug from 2450'-2842'. This places a 392' plug over the Bell Canyon perforation, across the Intermediate Casing shoe, and the top of the Delaware. WOC and tag plug.
3. Spot a 25 sx class "C" cement plug from 354'-454'. This places a 100' plug across the Surface Casing shoe. WOC and tag plug.
4. Spot a 30 sx class "C" cement plug from 150' up to the surface.
5. Remove all surface equipment, weld dry hole marker & clean location as per regulations.

Spud Date:

Rig Release Date:

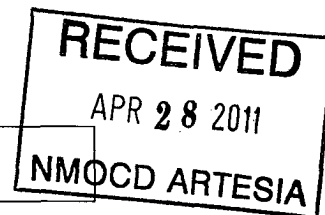

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE TITLE Regulatory Compliance Technician DATE April 27, 2011

Type or print name Craig Aton E-mail address: caton@yatespetroleum.com PHONE: 575-748-4385

For State Use Only

APPROVED BY: 172 Klein TITLE _____ DATE 4/29/2011

Conditions of Approval (if any):

Approval Granted providing work
is complete by 2/29/2011

**Notify OCD 24 hrs. prior
To any work done.**


WELL NAME: Eddy SWD # 1 FIELD AREA: Loving
 LOCATION: 2230 FNL, 660' FNL E-16-235-2Kc Eddy NM
 GL: 3021 ZERO: 24 AGL: _____
 KB: 3045 ORIG. DRLG./COMPL. DATE: 4/79
 COMMENTS: _____

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SET
20" 94 H40	404'
13 1/2" 61 S80	1023'
48 H40	2632'
9 3/8" 53.5 P110 LTC	1430'
53.5 N80 LTC	3820'
47 N80 LTC	5625'
40 CYS95 LTC	7840'
43.5 S95 LTC	9225'
53.5 N80 LTC	9650'
7" 26 S95 SFI Liner	9302'-12710'

3 1/2" 9.3 J55 EVE Cement Lined

3300'

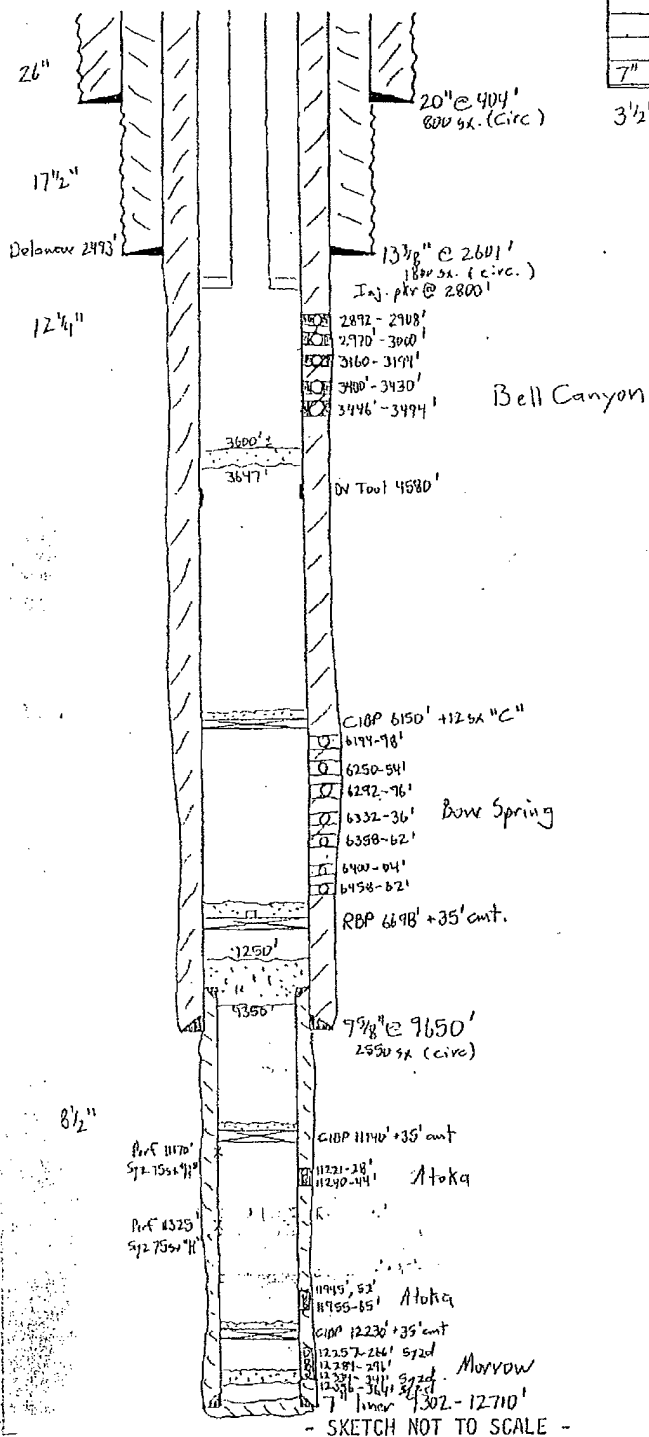


Before

REVISED: Brian Collins 11/24/91

WELL NAME: Eddy SWD #1 FIELD AREA: Loving
 LOCATION: 2230 FNL, 660' FWL E-16-235-28c Eddy NM
 GL: 3021' ZERO: 24' AGL: _____
 KB: 3045' ORIG. DRLG./COMPL. DATE: 4/79
 COMMENTS: _____

CASING PROGRAM:

SIZE/WT./GR./CONN.	DEPTH SET
20" 94 H40	404'
13 1/4" 61 S80	1023'
14" 48 H40	2632'
9 5/8" 53.5 P110 LTC	1430'
53.5 N80 LTC	3870'
47 N80 LTC	5625'
40 CYS95 LTC	7840'
43.5 S95 LTC	9225'
53.5 N80 LTC	9650'
7" 26 S95 SFJ Liner	9302' 12710'

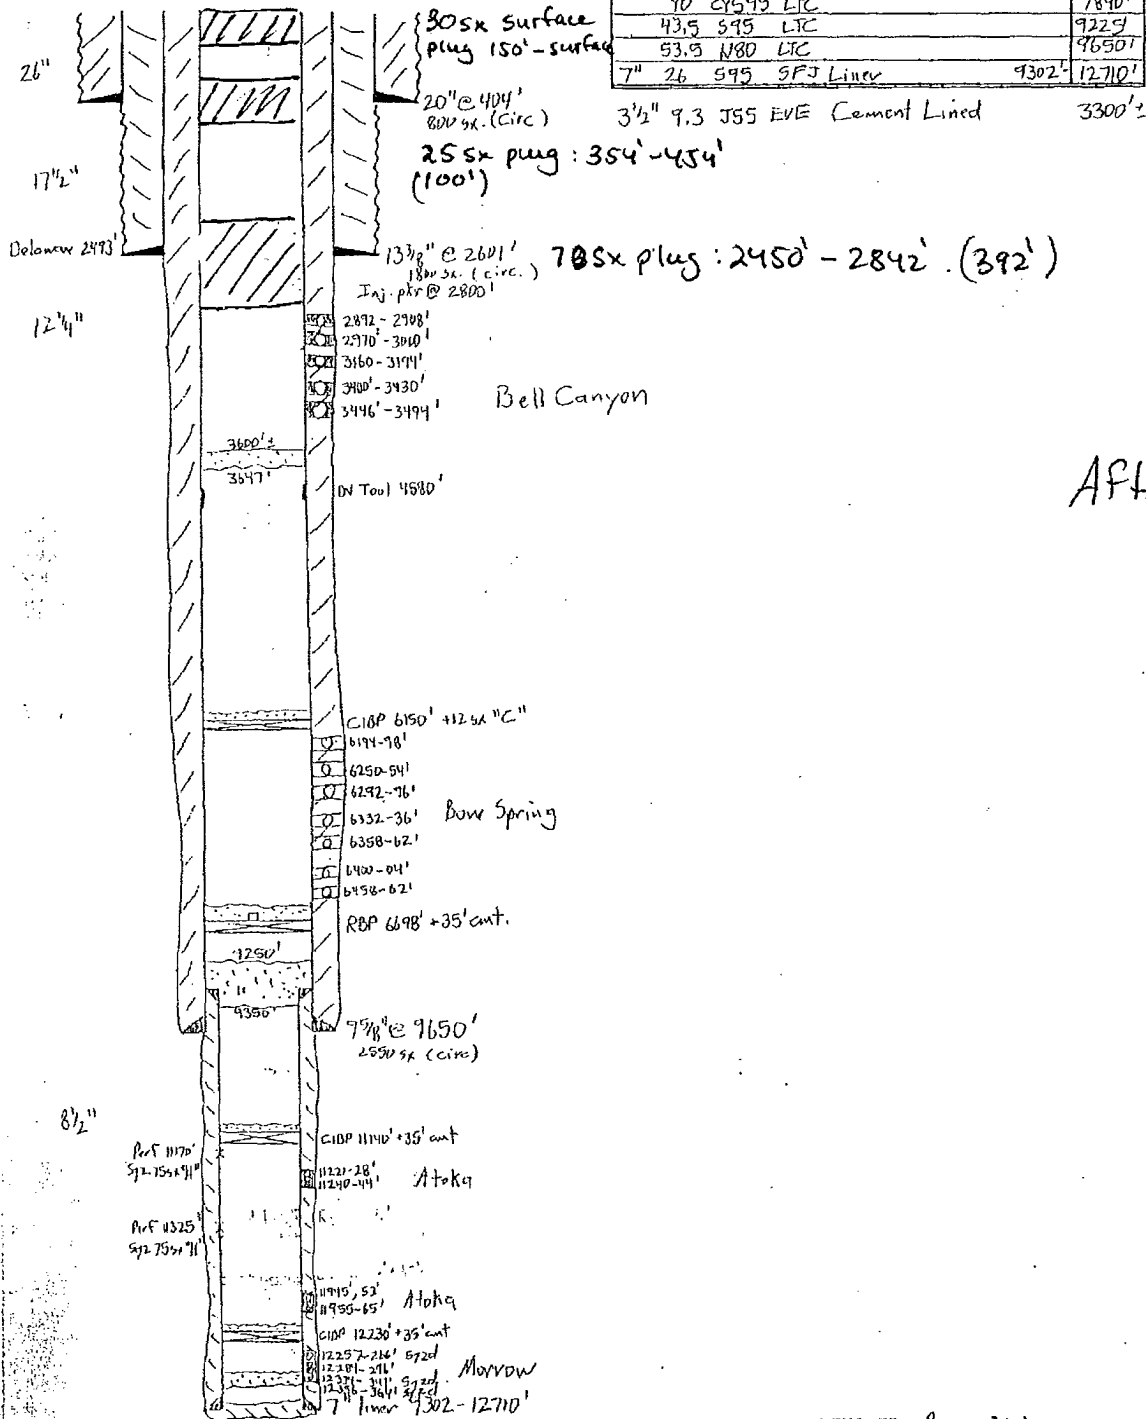

After.

- SKETCH NOT TO SCALE -

REVISED: Brian Collins 11/24/91