

clsf

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED

AUG 11 1993

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1100' FNL & 1980' FWL of Section 31-T5S-R25E

5. Lease Designation and Serial No.

NM-36409

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

McClellan MB Fed. #3

9. API Well No.

30-005-61018

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Verbal permission was received by Darrick Stallings, Engineer with Yates Petroleum Corporation, from Peter Chester with the BLM in Roswell on Wednesday, August 4, 1993, to plug and abandon well as follows:

1. RIH w/open ended tubing and tag top of cement at 3615'. Circulate 4-1/2" casing full of salt gel mud (10 ppg).
2. Spot a 25 sack Class "C" Neat cement plug from 1650-1300' in 4-1/2" casing.
3. Spot a 15 sack Class "C" Neat cement plug from 1100-900' in 4-1/2" casing. Tag plug.
4. Spot a 20 sack Class "C" Neat cement plug from 800-500' in 4-1/2" casing.
5. Spot 35 sacks Class "C" Neat at surface (inside & outside of 4-1/2" casing).
6. Cut off wellhead and install regulation abandonment marker. (50' plug)

14. I hereby certify that the foregoing is true and correct

Signed


Title Production Clerk

Date August 5, 1993

(This space for Federal or State office use)

Approved by
Conditions of approval, if any:

Title

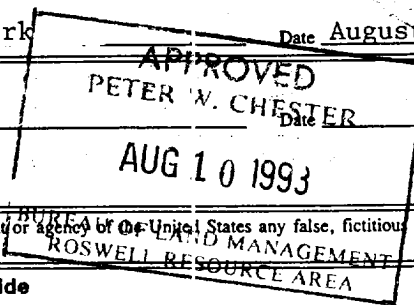

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side