

(November 1983)  
(Formerly 9-331)

NM Oil Cons. COMMISSION  
UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

McKay Oil Corporation

3. ADDRESS OF OPERATOR

Post Office Box 2014, Roswell, New Mexico 88201

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.  
See also space 17 below.)  
At surface

1980' FWL & 660' FSL

14. PERMIT NO.

15. ELEVATIONS (Show whether DV, RT, CR, etc.)

4196' GL

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Remmele Federal

9. WELL NO.

5

10. FIELD AND POOL, OR WILDCAT

West Pecos Slope Abo

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec. 25-6S-22E

12. COUNTY OR PARISH

Chaves

13. STATE

NM

10. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON\*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) surface & production casing

REPAIRING WELL


ALTERING CASING

ABANDONMENT\*

(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

- 5-1-86 Ran 21 jts. 8 5/8" J-55, 24# API csg. Set @ 886'. Cemented w/150 sx Halliburton Lite w/4% CaCl<sub>2</sub> and 150 sx Class "C" w/4% CaCl<sub>2</sub>. Plug down at 11:15 a.m. Tagged cement w/1" Kobe pipe, set at 408'. Brought cement to surface in 7 stages using 275 sx Class "C" cement w/5% CaCl<sub>2</sub> and 380 gals. Aqua Flo. Completed 1" job at 7:30 a.m.
- 5-4-86 Ran 82 jts. of 4 1/2" 9.5# J-55 API csg. Set at 3347'. Cemented w/300 sx of 50/50 POZ. Plug down at 8:00 a.m.
- 5-5-86 Ran 43 jts. of 1" Kobe pipe. Cemented fro 1396' to surface using 300 sx Halliburton Lite "C". Circ. 10 sx. Completed 1" job @ 11:15 a.m.

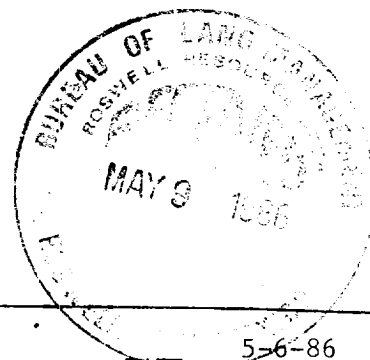

18. I hereby certify that the foregoing is true and correct

SIGNED Theresa Rodriguez TITLE Production Analyst

DATE 5-6-86

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

TITLE \_\_\_\_\_

ACCEPTED FOR RECORD  
PETER V. CHESTER  
DATE \_\_\_\_\_

\*See Instructions on Reverse Side

MAY 13 1986

BUREAU OF LAND MANAGEMENT  
RESOURCE AREA

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any false statement or knowingly omit material information in any communication to, or from, any Federal department or agency of the United States.