

UNITED STATES NM 011 Commissioner
DEPARTMENT OF THE INTERIOR (Other Instructions on reverse side)
BUREAU OF LAND MANAGEMENT Artesia, NM 88210

Budget Bureau No. 1004-0135
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO. dsf

NM 11593

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

N/A

7. UNIT AGREEMENT NAME

N/A

8. FARM OR LEASE NAME

Red Rock NB Federal

9. WELL NO.

2

10. FIELD AND POOL, OR WILDCAT

Pecos Slope Abo

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Unit N, Sec. 28-6S-25E

12. COUNTY OR PARISH 13. STATE

Chaves

NM

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

RECEIVED

1. OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

YATES PETROLEUM CORPORATION

(505) 748-1471

3. ADDRESS OF OPERATOR

105 South 4th St., Artesia, NM 88210

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

330' FSL & 1980' FWL, Sec. 28-T6S-R25E

14. PERMIT NO.

API #30-005-62748

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3741.9' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

NSL approved R-9047, 11-21-89.

Spudded 26" hole 2:00 PM 12-7-89. Set 40' of 20" conductor. Notified BLM, Roswell, NM of spud. Resumed drilling 17 1/2" hole 5:30 PM 12-9-89. Ran 15 joints 13-3/8" 54.5# J-55 ST&C casing set 633'. Guide shoe set 633', insert float set 591'. Cemented w/350 sx Pacesetter Lite "C" w/1/4# Celloseal, 5# Gilsonite and 3% CaCl2 (yield 1.98, wt 12.4). Followed w/200 sx "C" w/2% CaCl2 (yield 1.32, wt 14.8). PD 11:30 PM 12-10-89. Bumped plug to 600 psi, released pressure and float held okay. Cement circulated 50 sx. WOC. Tested casing to 1000 psi, OK. Drilled out 11:00 PM 12-11-89. WOC 24 hrs. Reduced hole to 12-1/4". Drilling hole and resumed drilling.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Production Supervisor

DATE 12-13-89

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

ACCEPTED FOR RECORD
DALE W. CHESTER
JAN 8 1990
BUREAU OF LAND MANAGEMENT
ROSWELL RESOURCE AREA

RECEIVED

DEC 28 1988

CC C.D.O.
ARTESIA OFFICE

BENNETT-CATHEY

TEMPERATURE
SURVEY
REPORT

FOR:
YATES PETRO CORP.
12/13/89

WELL INFORMATION :

LEASE : RED ROCK NMB	WELL # 2	FIELD :
LOCATION : 0	FILE # NMB-2	
COUNTY : CHAVES	STATE : NM	
ELEVATION : 0.00	ZERO POINT : KB	
TUBING SIZE : 0	DEPTH : 0.0	
CASING SIZE : 0	DEPTH : 0.0	
PACKER TYPE : 0	@ 0.00 feet	
PERFORATED 0.0 to 0.0 feet	TOTAL DEPTH : 1430.0	


TEST INFORMATION :

WELL CONDITION : DRILLING	WELL TYPE : GAS
SURFACE TUBING PRESSURE 0 psig by 0	
SURFACE CASING PRESSURE 0 psig by 0	
BOTTOM HOLE TEMPERATURE 0 deg. F. at 1430.0 feet	
BOTTOM HOLE PRESSURE 82.2 psig at 1430.0 feet	
INSTRUMENT TYPE : KELTNER	NUMBER : 384 RUN BY : CHAVEZ

C&W WIRELINE dba BENNETT-CATHEY, P.O. BOX 787 ARTESIA, NM 88210

DEPTH ft	dDEPTH ft	TEMP *F	dTEMP *F	GRADIENT *F /ft
0		50.5		
100	100	54.2	3.7	.037
200	100	54.4	.2	.002
300	100	54.5	.1	.001
400	100	54.7	.3	.003
500	100	56.3	1.5	.015
600	100	57.9	1.6	.016
700	100	58.0	.1	.001
800	100	58.5	.5	.005
900	100	60.5	2.1	.021
1000	100	64.5	3.9	.039
1100	100	69.6	5.2	.052
1200	100	75.7	6.0	.060
1300	100	82.2	6.5	.065
1430	130	82.2	.0	.000

CEMENT TOP IS AT 1000 FT. (KB)

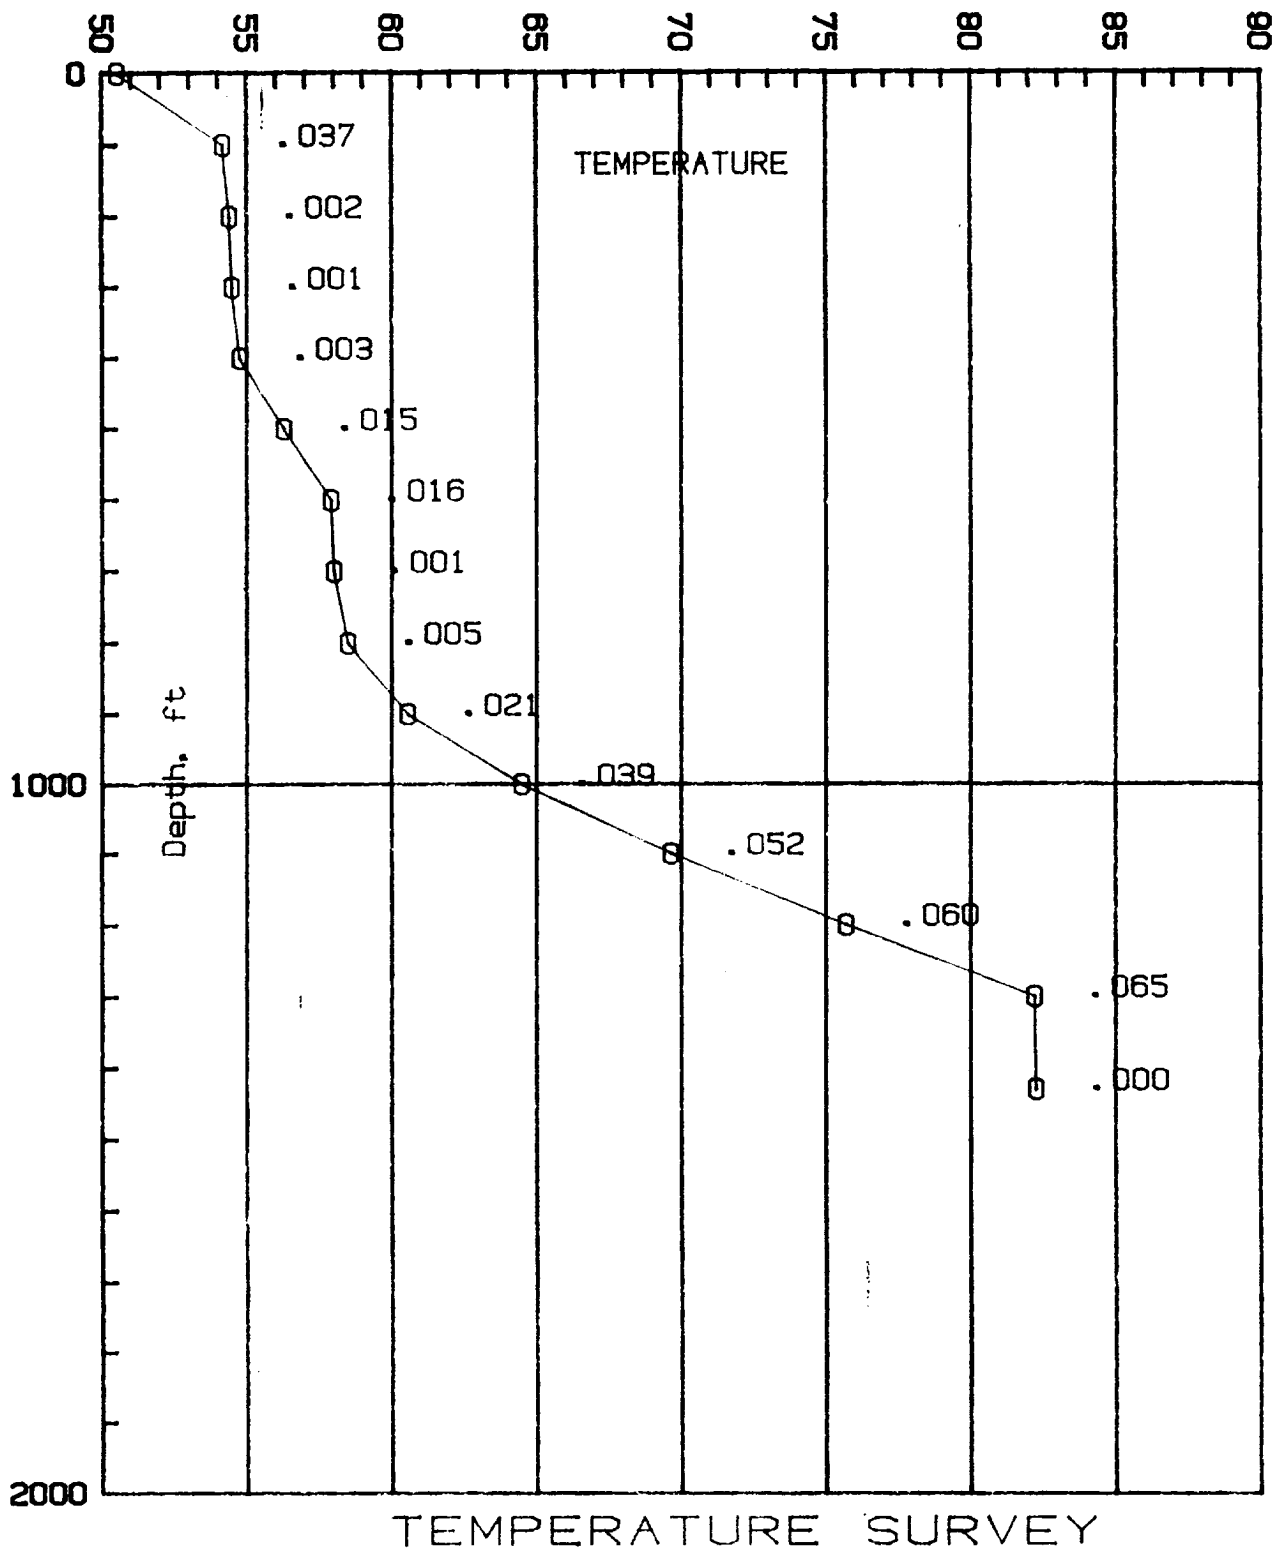

YATES PETRO CORP. Field : Well # 2
 Lease : RED ROCK NMB County : CHAVES State : NM
 Date of Run : 12/13/89 Gauge # 384 Run by : CHAVEZ