

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
NM Oil Cons. Commis.  
Artesia, NM 88210

Form approved.  
Budget Bureau No. 1004-013  
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL NO.

NM 53965

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Buffalo Valley "34" Fed. Com.

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Buffalo Valley (Penn)

11. SEC., T., R., M., OR BLK. AND  
SURVEY OR AREA

Sec. 34, T-14-S, R-27-E

12. COUNTY OR PARISH

Chaves

13. STATE

N.M.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐

2. NAME OF OPERATOR  
Bill Fenn, Inc.

3. ADDRESS OF OPERATOR  
P. O. Box 569 Giddings, Texas 78942

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.)  
At surface  
1190' FSL & 990' FEL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)  
3451.7 GR

RECEIVED

MAY 23 '90

O. C. D.  
ARTESIA, OFFICE

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐ PULL OR ALTER CASING ☐  
FRACTURE TREAT ☐ MULTIPLE COMPLETE ☐  
SHOOT OR ACIDIZE ☐ ABANDON\* ☐  
REPAIR WELL ☐ CHANGE PLANS ☐  
(Other) ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐ REPAIRING WELL ☐  
FRACTURE TREATMENT ☐ ALTERING CASING ☐  
SHOOTING OR ACIDIZING ☐ ABANDONMENT\* ☐  
(Other) Spud date & Surface Casing. ☒


(NOTE: Report results of multiple completion on Well  
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Spudded a 17-1/2" hole on April 9, 1990.

Drilled to a depth of 352' K.B. and ran and set surface casing as follows:

ITEM (BOTTOM TO TOP)	LENGTH	TOP of SECTION -K.B.
1 - Howco Type "M" Guide Shoe	1.00'	351.00' K.B.
1 - Shoe Joint, 13-3/8" 48#/ft., ST&C with insert float in collar	47.01'	303.99' K.B.
7 - Joints 13-3/8" 48#/ft., ST&C	287.99'	16.00' K.B.
Total Casing	336.00'	
K.B. to G.L.	16.00'	
Casing set at	352.00'	

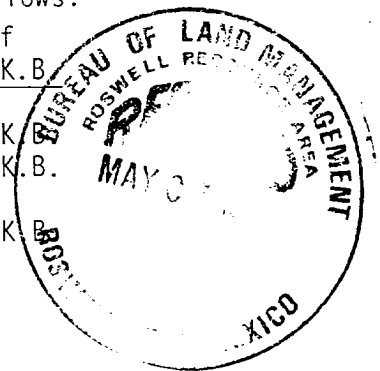

NOTE: Ran four 13 3/8" X 17-1/2" Howco Type Centralizers from 340' on the first four joints of casing.

The hole was circulated with rig pump and cemented as follows:  
See reverse side.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Agent

DATE

5/3/90

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD  
PETER W. CHESTER

DATE

MAY 22 1990

BUREAU OF LAND MANAGEMENT  
ROSWELL RESOURCE AREA

\*See Instructions on Reverse Side