

Submit To Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-105 Revised June 10, 2003
		WELL API NO. 30-025-33021
		5. Indicate Type of Lease STATE ☒ FEE ☐
		State Oil & Gas Lease No.
WELL COMPLETION OR RECOMPLETION REPORT AND LOG		
1a. Type of Well: OIL WELL ☐ GAS WELL ☐ DRY ☐ OTHER ☐ SWD		7. Lease Name or Unit Agreement Name Gecko 27 State
b. Type of Completion: NEW ☐ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF. WELL OVER BACK RESVR. ☒ OTHER		
2. Name of Operator Hal J. Rasmussen Operating, Inc.		8. Well No. 1
3. Address of Operator 550 West Texas, Suite 200, Midland, Texas 79701		9. Pool name or Wildcat Wildcat Strawn
4. Well Location Unit Letter <u>A</u> : <u>660</u> Feet From The <u>North</u> Line and <u>660</u> Feet From The <u>East</u> Line Section <u>27</u> Township <u>15S</u> Range <u>38E</u> NMPM Lea County		
10. Date Spudded 9/17/03	11. Date T.D. Reached 11/9/03	12. Date Compl. (Ready to Prod.) 11/9/03
13. Elevations (DF& RKB, RT, GR, etc.) 3712'		14. Elev. Casinghead
15. Total Depth 11,283'	16. Plug Back T.D.	17. If Multiple Compl. How Many Zones? N/A
18. Intervals Drilled By		18. Rotary Tools 0-11,283'
19. Producing Interval(s), of this completion - Top, Bottom, Name N/A		20. Was Directional Survey Made No
21. Type Electric and Other Logs Run N/A		22. Was Well Cored N/A
23. CASING RECORD (Report all strings set in well)		
CASING SIZE	WEIGHT LB./FT.	DEPTH SET
13-3/8"	54.5/68#	420'
9-5/8"	38/40#	4918'
5-1/2"	17#	9850'
24. LINER RECORD		25. TUBING RECORD
SIZE	TOP	BOTTOM
4"	9750'	11,290'
SACKS CEMENT		SCREEN
550 sx		
26. Perforation record (interval, size, and number)		27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.
perf #1 10920' - 11010' perf #6 10602' - 10632' perf #11 10304' - 10324' perf #2 10940' - 10960' perf #7 10546' - 10566' perf #12 10240' - 10250' perf #3 10836' - 10856' perf #8 10440' - 10470' perf #13 10110' - 10130' perf #4 10804' - 10824' perf #9 10420' - 10440' perf #14 10070' - 10090' perf #5 10714' - 10734' perf #10 10394' - 10404' perf #15 9930' - 9960'		DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED
28. PRODUCTION		
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)
		Well Status (Prod. or Shut-in)
Date of Test	Hours Tested	Choke Size
		Prod'n For Test Period
Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate
		Oil - Bbl.
		Gas - MCF
		Water - Bbl.
		Oil Gravity - API - (Corr.)
29. Disposition of Gas (Sold, used for fuel, vented, etc.)		Test Witnessed By
30. List Attachments		
31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief		
Signature <u>Carolyn Price</u>		Printed Name <u>Carolyn Price</u> Title <u>Agent</u> Date <u>5/19/04</u>
E-mail Address <u>csptx@hotmail.com</u>		

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

OIL OR GAS SANDS OR ZONES

IMPORTANT WATER SANDS


No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology

Proposed SWD Well

GL: 3712' KB:

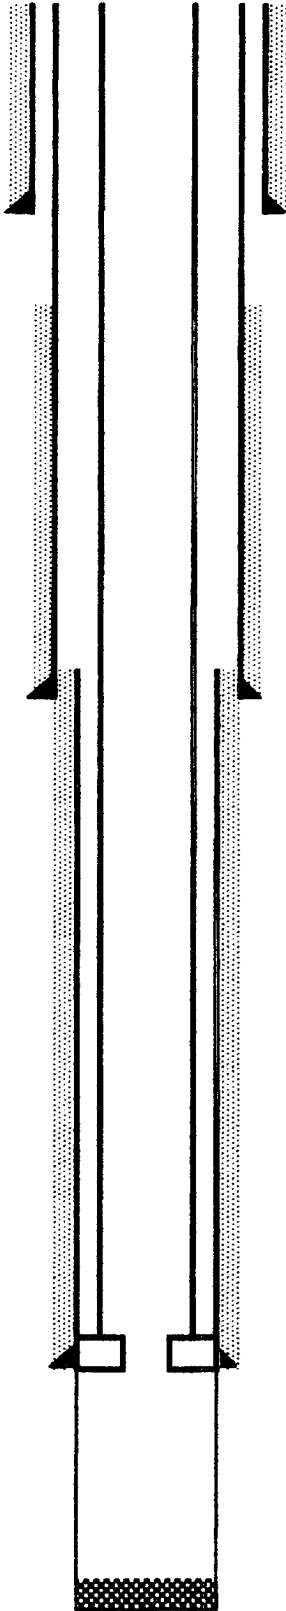

TD: 11,283'

GECKO 27 STATE No. 1 SWD

660' FNL & 660' FEL
Sec 27, T-15S R-38E
Lea County, NM

13 3/8" 54.5/68# @ 420' w/ 425 sx

Injection Interval: Penn 9850' - 11,182'

Injection String: 3 1/2" 4700' - 9800'
Pkr @ 9800'

Max Inj Pressure: 2000 psi

Max Inj Rate: 6,000 BPD

9 5/8" 36/40# @ 4918' w/ 1440 sx
TOC: 650 by TS

Surface Owner: State of New Mexico

Formation Tops	
Rustler	2200
Yates	3280
Seven Rivers	3450
San Andres	4830
Glorietta	6363
Upper Clearfork	6920
Tubb	7517
Lower Clearfork	7676
Abo	8217
Wolfcamp	9290
Pennsylvanian	9816
Lower Miss	11938
Woodford Shale	12670
Devonian	12780

5 1/2" 17# 4700' - 9850' w/ 756 sx "H"

Cmt Plug 11,182' - 11,282' w/ 30 sx

