

Office

Energy, Minerals and Natural Resources

October 13, 2009

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S St Francis Dr., Santa Fe, NM 87505

HOBBS OCD

JUN 13 2011

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505WELL API NO.
30-025-34400

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name
Carlisle8. Well Number
1 Y9. OGRID Number
613710. Pool name or Wildcat *Shoe Bar*
~~Carlsbad, Morrow South (Pro Gas)~~ *Strawn*SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☒2. Name of Operator
Devon Energy Production Company, LP3. Address of Operator
20 North Broadway, Oklahoma City, OK 73102 405.228.83644. Well Location *K*
Unit Letter *X*: 1721 feet from the South line and 1909 feet from the West line

Section 10 Township 16S Range 35E Lea County NMPM

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4015 KB; 3998' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐TEMPORARILY ABANDON ☐ CHANGE PLANS ☐PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐ P AND A ☒CASING/CEMENT JOB ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 5-5-2011 MIRU.
- 5-6-2011 TIH w/ tbg, tag fill @ 11294'.
- 5-6-2011 Spot 50 sx cmt at 11294'. (Top of Strawn perfed at 11264')
- 5-9-2011 RIH w/tbg tag plug @ 10963. Dis place hole w/ 260bbls mud.
- 5-10-2011 Spot 30 sx cmt at 8030'. (Calc. TOC at 7755')
- 5-11-2011 Cut 5-1/2" csg @ 7150'. 5-1/2" casing stuck.
- 5-12-2011 Spot 30 sx cmt at 7198'. RIH w/tbg tag plug @ 6998'.
- 5-13-2011 Free point and cut csg @ 5300'. CSG 100% stuck at 5470', csg 100% free @ 5300'. L/D csg
- 5-17-2011 Spot 30 sx cmt plug @ 5350'. RIH w/tbg tag plug @ 5241' POOH L/D tbg to 4800' spot 40 sx cmt plug.
- 5-18-2011 RIH w/tbg tag plug @ 4730'. POOH w/tbg to 2970' Spot 35 sx cmt plug. POOH L/D tbg to 2005' spot 35 sx cmt plug POOH w/tbg to 540' spot 50 sx cmt plug POOH w/tbg.
- 5-19-2011 RIH w/tbg tag plug @ 412' pull up to 107' pump 40 sx cmt circ to surface Cut csg strings off 3' BGL. Set dry hole marker. RDMO. Recovered 122 JTS 5 1/2 CSG and 357 JTS 2 7/8 tbg.

Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms & Web Links/State Minerals/OCD.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Derek Berg* TITLE Engineering Technician DATE 6-9-2011

Type or print name Derek Berg E-mail address: Derek.Berg@dmn.com PHONE: 405.228.8364

For State Use Only

APPROVED BY: *[Signature]* TITLE STAFF TITLE DATE 6-14-2011

Conditions of Approval (if any):

JUN 14 2011

OK

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: CARLISLE 1 Y		Field: TOWNSEND	
Location: 1721' FSL & 1909' FWL; SEC 10-T16S-R35E		County: LEA	State: NM
Elevation: 3998' GL; 4015' KB		Spud Date: 5/23/98	Compl Date: 7/18/98
API#: 30-025-34400	Prepared by: Derek Berg	Date: 6/9/11	Rev:

ACTUAL PLUG & ABANDONMENT

17-1/2" hole
13-3/8", 48#, H40, @ 489'
 Cmt'd w/450 sx to surf

Top of Salt - 1952'

Base of Salt - 2920'

12-1/4" hole
9-5/8", 36# & 40#, @ 4,750'
 Cmt'd w/1800 sx to surf

Est. TOC - 7500'

STRAWN (8/21/09)
11264'-11294'


ATOKA
11572'-11574'
11577'-11593'

ATOKA
11710'-11714'
11725'-11727'

acidized 11572-11725 w/2K gals

MORROW
12068'-12120'

7-7/8" Hole
5-1/2", 17#, N80 & S95, @ 12,370'
 Cmt'd w/725 sx. TOC unknown

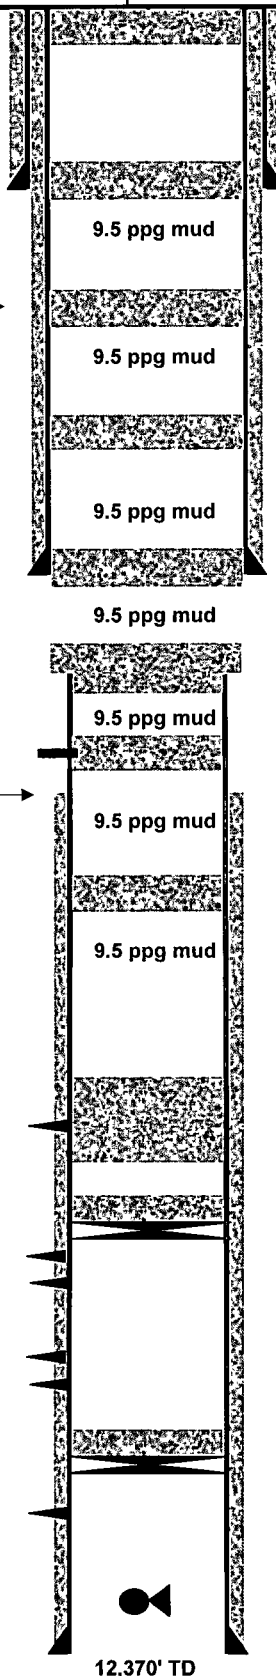

1. Circ 40 sx cmt from 107' to surf.
2. Cut wellhead off 3' BGL.
3. Set dry hole marker.

1. Spot 50 sx (150') cmt plug @ 540'.
2. Calc TOC @ 435'.

1. Spot 35 sx (105') cmt plug @ 2005'.
2. Calc TOC @ 1900'

1. Spot 35 sx (105') cmt plug @ 2970'.
2. Calc TOC @ 2865'.

1. Spot 40 sx cmt plug @ 4800'.
2. TAG TOC @ 4730'

1. Cut 5 1/2 csg @ 5300' L/D csg.
2. Spot 30 sx cmt plug @ 5350' tag plug @ 5241'

1. Cut 5 1/2" csg @ 7150'. CSG stuck. Spot 30 sx plug @ 7198'. Tag plug @ 6998'

1. Spot 30 sx cmt @ 8030'.
2. Calc TOC @ 7755'.

1. TAG fill @ 11294'
2. Spot 50 sx cmt @ 11294'
3. TAG TOC @ 10963'

35' Cmt. 11505' PBTD.
 CIBP @ 11540' (8/20/09)

35' Cmt. 11975' PBD
 CIBP @ 12010'

Top TCP gun assembly @ +/-12191'

12,370' TD