

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N French Dr, Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd, Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBS OCD

AUG 30 2011

WELL API NO. 30-025-29133
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. LG-1543
7. Lease Name or Unit Agreement Name State DW
8. Well Number 11
9. OGRID Number 192463
10. Pool name or Wildcat Mesalero El Yates Seawater Queen Escal Bene Spring

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator OXY USA WTP LP	
3. Address of Operator P.O. Box 50250 Midland, TX 79710	
4. Well Location Unit Letter <u>M</u> : <u>990</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>West</u> line Section <u>12</u> Township <u>18S</u> Range <u>33E</u> NMPM County <u>Lea</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4010' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-9050' PBD-4025' PERFS-43278-3290' CIBP @ 4275'

13-3/8" 48# csg @ 375' w/ 500sx, 17-1/2" hole, TOC-Surf-Circ
8-5/8" 24-32# csg @ 3160' w/ 1250sx, 11" hole, TOC-Surf-Circ
5-1/2" 15.5-17# csg @ 9050' w/ 1315sx, 7-7/8" hole, *TOC-3227'-CBL
*6/04-Perf @ 3200', sqz 425sx cmt, circ to surf

1. RIH & Set CIBP @ 3228', spot 25sx cmt to 3110' WOC-Tag
 2. M&P 25sx cmt @ 2875-2775' WOC-Tag
 3. M&P 25sx cmt @ 1335-1235' WOC-Tag
 4. M&P 75sx cmt @ 425' to Surface
- 10# MLF between plugs

Spud Date:

Rig Rele:

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 8/29/11

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717


For State Use Only

APPROVED BY: [Signature] TITLE Staff mgr DATE 8-31-2011

Conditions of Approval (if any):

AUG 31 2011

OXY USA Inc. - Current
State DW #11
API No. 30-025-29133

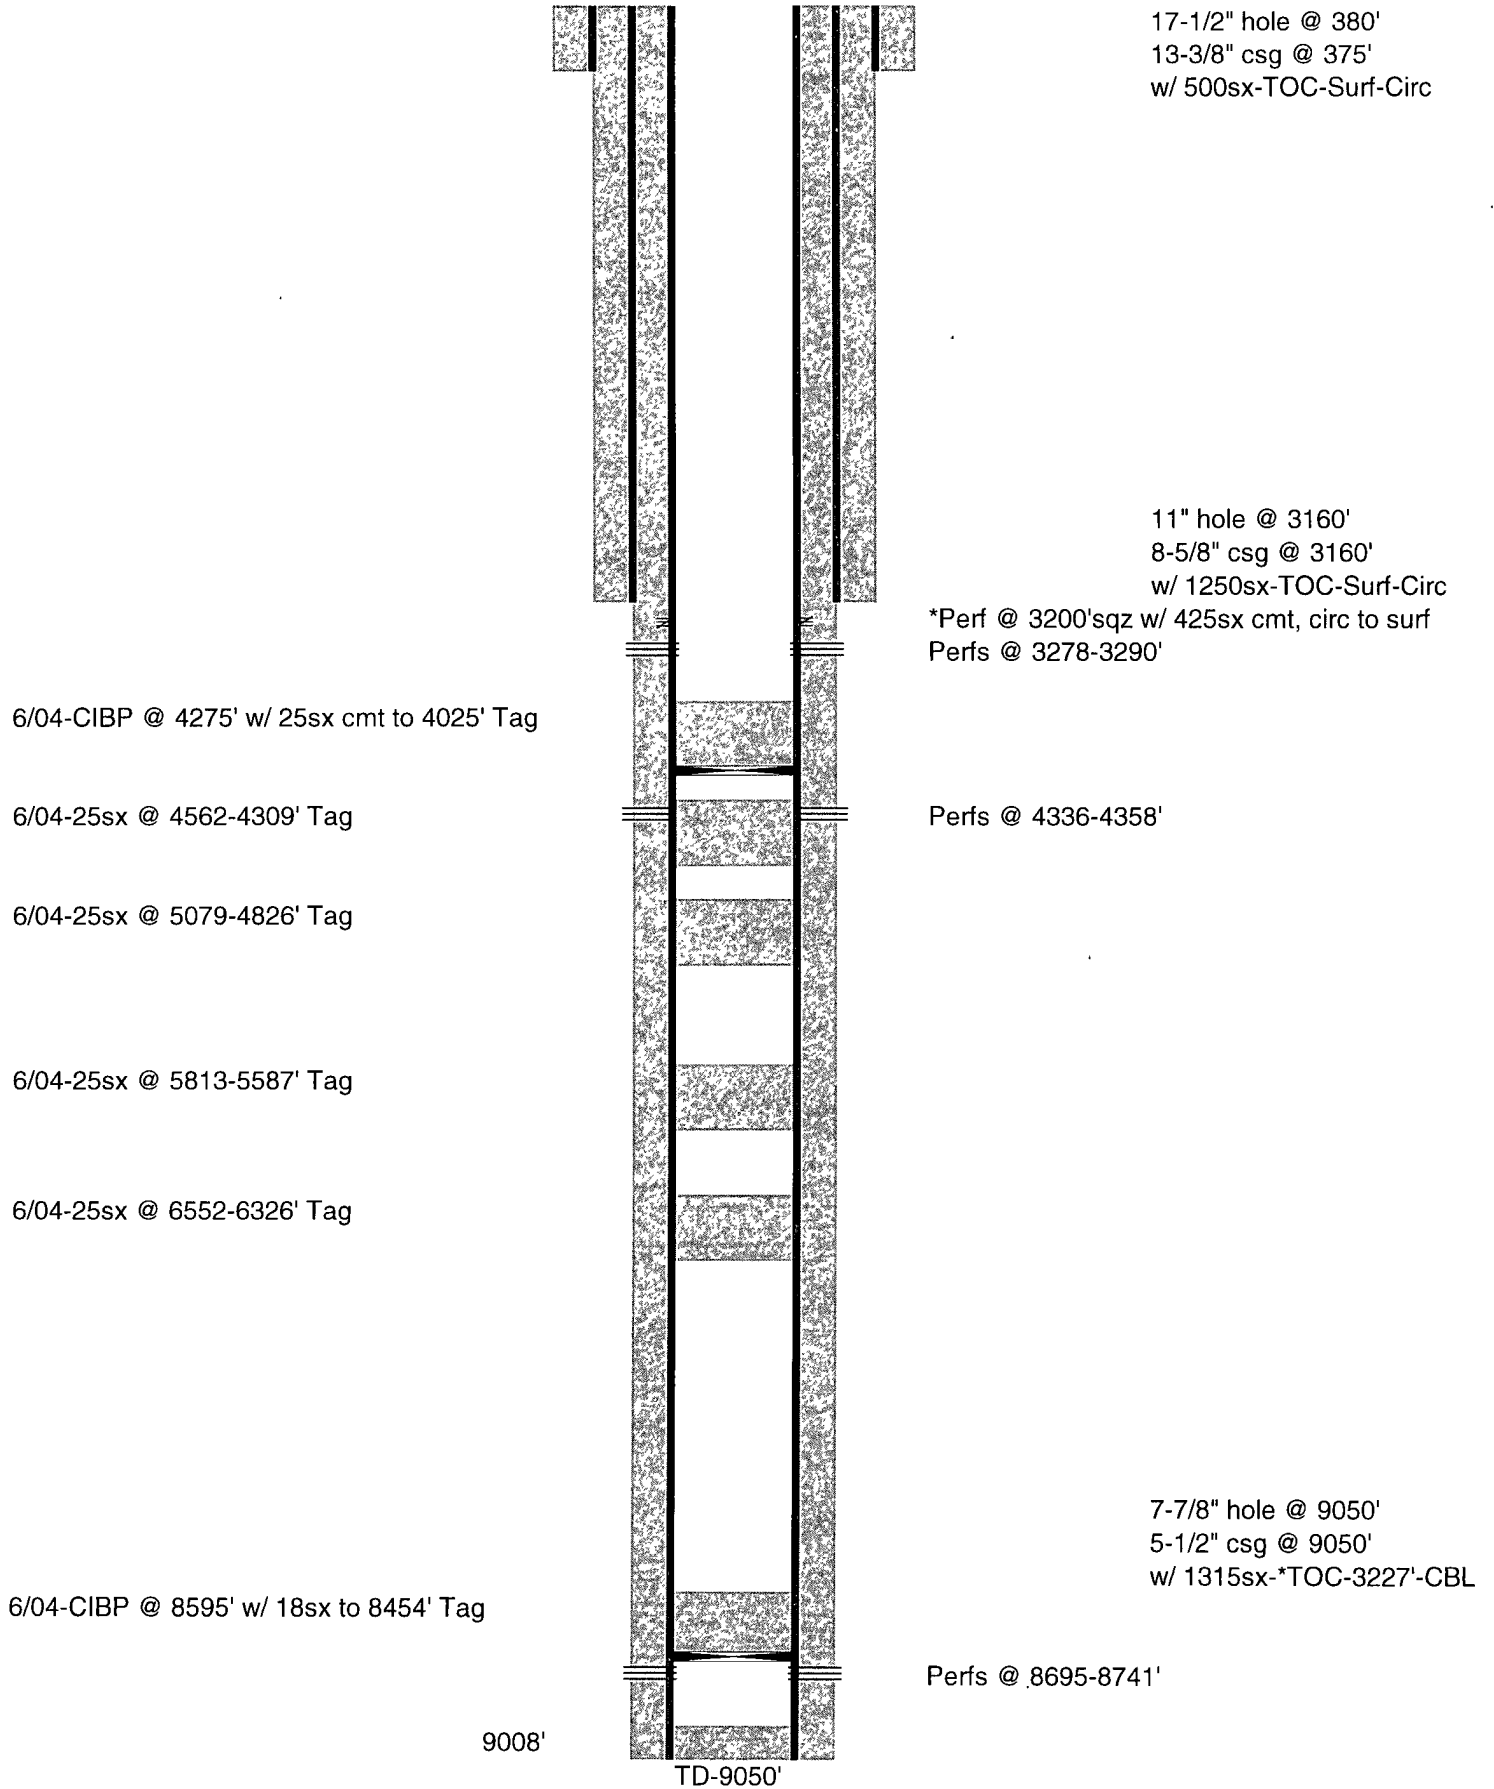

OXY USA Inc. - Proposed
State DW #11
API No. 30-025-29133

75sx @ 425'-Surface

25sx @ 1335-1235' WOC-Tag

25sx @ 2875-2775' WOC-Tag

CIBP @ 3228' w/ 25sx to 3110' WOC-Tag

6/04-CIBP @ 4275' w/ 25sx cmt to 4025' Tag

6/04-25sx @ 4562-4309' Tag

6/04-25sx @ 5079-4826' Tag

6/04-25sx @ 5813-5587' Tag

6/04-25sx @ 6552-6326' Tag

6/04-CIBP @ 8595' w/ 18sx to 8454' Tag

17-1/2" hole @ 380'
13-3/8" csg @ 375'
w/ 500sx-TOC-Surf-Circ

11" hole @ 3160'
8-5/8" csg @ 3160'
w/ 1250sx-TOC-Surf-Circ

*6/04-Perf @ 3200'sqz w/ 425sx cmt, circ to surf
Perfs @ 3278-3290'

Perfs @ 4336-4358'

7-7/8" hole @ 9050'
5-1/2" csg @ 9050'
w/ 1315sx-*TOC-3227'-CBL

Perfs @ 8695-8741'

9008'

TD-9050'