

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103

June 19, 2008

RECEIVED

OIL CONSERVATION DIVISION

SEP 19 2011

1220 South St. Francis Dr.

Santa Fe, NM 87505

HOBBSSUU

WELL API NO.

30-025-20306

5. Indicate Type of Lease

STATE ☐FEE ☒

6. State Oil & Gas Lease No.

FEE

7. Lease Name or Unit Agreement Name

John D. Knox

8. Well Number

11

9. OGRID Number

007673

10. Pool name or Wildcat

Oil Center; Blinbry

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Exxon Mobil Corporation-Attn: Roy Springfield

3. Address of Operator

P.O. Box 4358, CORP-MI-203, Houston TX 77210-4358

4. Well Location

Unit Letter I : 2310 feet from the South line and 330 feet from the East lineSection 10Township 21SRange 36E

NMPM

County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3597'

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐CHANGE PLANS ☐PULL OR ALTER CASING ☐MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐P AND A ☒CASING/CEMENT JOB ☐OTHER: ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRUWSU. NDWH. NUBOP. POH KILL STRING.

2. PU WORK STRING. TAG CEMENT ON TOP OF CIBP AT 5725'.

3. MIX AND PUMP SALT GEL.

4. SPOT 20 SX BALANCED PLUG AT 2800'-2505' -BOTTOM OF SALT

5. PERFORATE AND SQZE 45 SX CEMENT AT 1380'. DISPLACE TOC TO 1230'. -TOP OF SALT & BASE OF SHOE

6. PERFORATE CASING AT 450'. CIRCULATE CEMENT TO SURFACE FROM 450' WITH 100 SX CEMENT.

7. CUT AND CAP WELL. INSTALL DRY HOLE MARKER.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

AGENT

DATE 08-31-11

Type or print name

E-mail address:

PHONE:

For State Use Only

APPROVED BY:

TITLE

DATE

Conditions of Approval (if any):

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS

SEP 19 2011

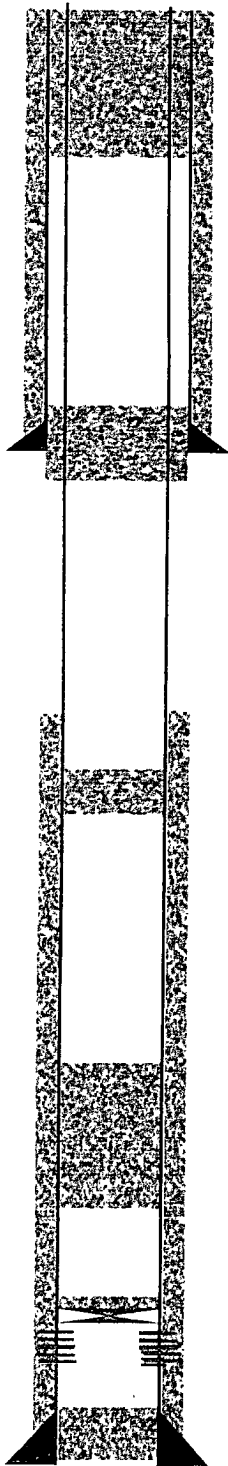
As Is

**John D. Knox 11
LEA COUNTY, NM.**

	Size	Wt.	Grde	Thrd	Depth	(E)TOC	Sks/Cmt
SURFACE	7-5/8"	24	K-55		1329	Surface	575
PRODUCTION	4-1/2"	9.5	J-55		6225	2400.000	500
OPEN HOLE							
TUBING	2-3/8"	4.7	J-55		2000		

[illegible]

PBTD MD	6204
TVD	
T DPTH MD	6225
TVD	
FLUID LIH	
DATE LIH	
PREPARED BY:	
Doland	
DATE:	9/25/2002

☐ **As Is**

	Size	Wt.	Grde	Thrd	Depth	(E)TOC	Sks/Cmt
SURFACE	7-5/8"	24	K-55		1329	Surface	575
PRODUCTION	4-1/2"	9.5	J-55		6225	2400 000	500
OPEN HOLE							
TUBING	2-3/8"	4.7	J-55		2000		

Description	OD	ID	Depth
Cement plug Perforate and Circulate ETOC 5' EBOC 450'			
Cement plug Perforate and Squeeze ETOC 1230' EBOC 1380'			
Cement plug ETOC 2505' EBOC 2800'			
2.5 SX OF CEMENT DUMPBAILED TA'D 01-05-1994			5725
CIBP			5745
TOP PERFORATIONS			5812
BOTTOM PERFORATIONS			5945

PBTD MD	6204
TVD	
T DPTH MD	6225
TVD	
FLUID LIH	
DATE LIH	
PREPARED BY:	
Doland	
DATE:	9/25/2002