

Submit To Appropriate District Office

State Lease - 6 copies

Fee Lease - 5 copies

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals and Natural Resources

Oil Conservation Division

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-105

Revised June 10, 2003

WELL API NO.

30-025-36933

5. Indicate Type of Lease

STATE ☐ FEE ☒

State Oil & Gas Lease No. 34389

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. Type of Well:

OIL WELL ☒ GAS WELL ☐ DRY ☐ OTHER ☐

b. Type of Completion:

NEW ☒ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF.

WELL OVER BACK RESVR. ☐ OTHER ☐

2. Name of Operator

Platinum Exploration, Inc.

3. Address of Operator

550 W. Texas, Suite 500 Midland, TX 79701

4. Well Location

BHL: A-35-14s-37e, 331/N & 349/E

Unit Letter B 810 Feet From The North Line and 1980 Feet From The East Line

Section 35 Township 14S Range 37E NMPM Lea County

10. Date Spudded 12/5/04

11. Date T.D. Reached 1/30/05

12. Date Compl. (Ready to Prod.) 2/5/05

13. Elevations (DF& RKB, RT, GR, etc.) 3810' GR

14. Elev. Casinghead

15. Total Depth 14,346 MD/12,633 TVD

16. Plug Back T.D. 14,346 MD/12,633 TVD

17. If Multiple Compl. How Many Zones?

18. Intervals Drilled By

Rotary Tools X

Cable Tools

19. Producing Interval(s), of this completion - Top, Bottom, Name

Devonian 12,545-14,346 MD/12,545-12,633 TVD Open Hole

20. Was Directional Survey Made

21. Type Electric and Other Logs Run

Platform Express HRLA/CNL/FMI

22. Was Well Cored

23. CASING RECORD (Report all strings set in well)

CASING SIZE	WEIGHT LB./FT.	DEPTH SET	HOLE SIZE	CEMENTING RECORD	AMOUNT PULLED
13 3/8	48	425	17 1/2	375 sx	None
9 5/8	40	4700	11	2558 sx	None
7	26/23#	12,804	8 3/4	765 sx	None
	DV tool	10,562		1280 sx	None

24. LINER RECORD

SIZE	TOP	BOTTOM	SACKS CEMENT	SCREEN

25. TUBING RECORD

SIZE	DEPTH SET	PACKER SET
2 7/8"	11,060	11,400

26. Perforation record (interval, size, and number)

Perfs 12,036-60'

Open Hole 12,545-14,346'

27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC.

DEPTH INTERVAL	AMOUNT AND KIND MATERIAL USED
12,036-60	Sqz'd w/375 sx CI H
12,545-14,346	A/4000 gals 10% acetic
12,545-14,346	A/10,000 gals 15% HCL

28. PRODUCTION

Date First Production	Production Method (Flowing, gas lift, pumping - Size and type pump)	Well Status (Prod. or Shut-in)
2/5/05	Pumping - Reda 540 GN 2100	Producing

Date of Test	Hours Tested	Choke Size	Prod'n For Test Period	Oil - Bbl	Gas - MCF	Water - Bbl.	Gas - Oil Ratio
2/5/05	24	N/A		100	80	3000	

Flow Tubing Press.	Casing Pressure	Calculated 24-Hour Rate	Oil - Bbl.	Gas - MCF	Water - Bbl.	Oil Gravity - API - (Corr.)
150	40		100	80	3000	44.1

29. Disposition of Gas (Sold, used for fuel, vented, etc.)

Sold

Test Witnessed By

30. List Attachments

C-104, logs

31. I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief

Signature Julie Figel

Printed Name Julie Figel

Title Agent

Date 4/7/05

E-mail Address jfigel@t3wireless.com

• • • • •

Southeastern New Mexico	Northwestern New Mexico
-------------------------	-------------------------

OIL OR GAS

.....

IMPORTANT WATER SANDS

tion to which water rose in hole.

No. 1, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

S	Lithology		From	To	Thickness	
1	Gravelly sand		0.0	0.5	0.5	
2	Sand		0.5	1.0	0.5	
3	Sand		1.0	1.5	0.5	
4	Sand		1.5	2.0	0.5	
5	Sand		2.0	2.5	0.5	
6	Sand		2.5	3.0	0.5	
7	Sand		3.0	3.5	0.5	
8	Sand		3.5	4.0	0.5	
9	Sand		4.0	4.5	0.5	
10	Sand		4.5	5.0	0.5	
11	Sand		5.0	5.5	0.5	
12	Sand		5.5	6.0	0.5	
13	Sand		6.0	6.5	0.5	
14	Sand		6.5	7.0	0.5	
15	Sand		7.0	7.5	0.5	
16	Sand		7.5	8.0	0.5	
17	Sand		8.0	8.5	0.5	
18	Sand		8.5	9.0	0.5	
19	Sand		9.0	9.5	0.5	
20	Sand		9.5	10.0	0.5	
21	Sand		10.0	10.5	0.5	
22	Sand		10.5	11.0	0.5	
23	Sand		11.0	11.5	0.5	
24	Sand		11.5	12.0	0.5	
25	Sand		12.0	12.5	0.5	
26	Sand		12.5	13.0	0.5	
27	Sand		13.0	13.5	0.5	
28	Sand		13.5	14.0	0.5	
29	Sand		14.0	14.5	0.5	
30	Sand		14.5	15.0	0.5	
31	Sand		15.0	15.5	0.5	
32	Sand		15.5	16.0	0.5	
33	Sand		16.0	16.5	0.5	
34	Sand		16.5	17.0	0.5	
35	Sand		17.0	17.5	0.5	
36	Sand		17.5	18.0	0.5	
37	Sand		18.0	18.5	0.5	
38	Sand		18.5	19.0	0.5	
39	Sand		19.0	19.5	0.5	
40	Sand		19.5	20.0	0.5	
41	Sand		20.0	20.5	0.5	
42	Sand		20.5	21.0	0.5	
43	Sand		21.0	21.5	0.5	
44	Sand		21.5	22.0	0.5	
45	Sand		22.0	22.5	0.5	
46	Sand		22.5	23.0	0.5	
47	Sand		23.0	23.5	0.5	
48	Sand		23.5	24.0	0.5	
49	Sand		24.0	24.5	0.5	
50	Sand		24.5	25.0	0.5	
51	Sand		25.0	25.5	0.5	
52	Sand		25.5	26.0	0.5	
53	Sand		26.0	26.5	0.5	
54	Sand		26.5	27.0	0.5	
55	Sand		27.0	27.5	0.5	
56	Sand		27.5	28.0	0.5	
57	Sand		28.0	28.5	0.5	
58	Sand		28.5	29.0	0.5	
59	Sand		29.0	29.5	0.5	
60	Sand		29.5	30.0	0.5	
61	Sand		30.0	30.5	0.5	
62	Sand		30.5	31.0	0.5	
63	Sand		31.0	31.5	0.5	
64	Sand		31.5	32.0	0.5	
65	Sand		32			

From	To	Thickness In Feet	Lithology

T. D. Pope "35" No. 1

810' FNL & 1980' FEL

Unit B, Sec 35, T-14S, R-37E


Lea County, NM

API#: 30-025-36933

Spud 12/5/04

Well Type: New Drill Completed 2/05

GL: 3,810' KB: 3,828'

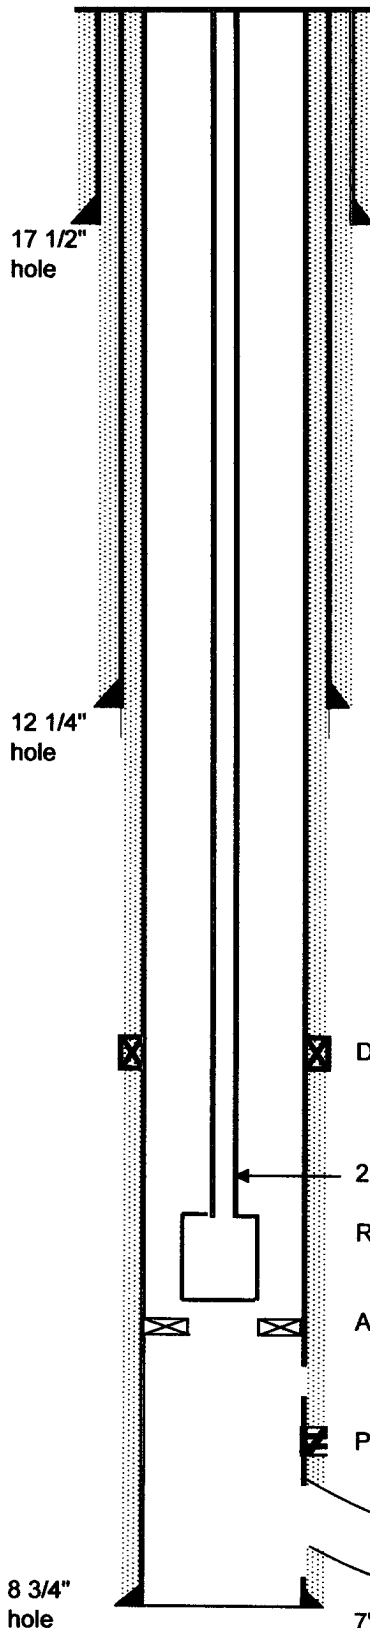

13 ³/₈" 48# H-40 @ 425' w/ 375 sx
TOC: Surface-Circ 42 sx

9 ⁵/₈" 40# H-40 @ 4700' w/ 2,558 sx
TOC: Surface-Circ 150 sx

DVT @ 10,562', Cmt'd w/ 1,280 sx

2 7/8" tbg to 11,060'

Reda 540 GN 2100 pump

Arrow pac pkr @ 11,400'

Perfs 12,036-60' Sqz'd w/350 sx CI H

Window 12,545'-12,550' - 1700' VS - Azim 73.6°

7"26/23# L-80 @ 12,804', Cmt'd w/ 765 sx
TOC: Surface-Circ 95 sx



Formation Tops	
T/Salt	2209
T/Yates	3127
T/Queen	3922
T/San Andre	4630
T/Glorieta	6153
T/Tubb	7287
T/Abo	7967
T/Wolfcamp	9181
T/Penn	9898
T/Canyon	10088
T/Strawn	10436
T/Atoka	11062
T/Miss	11209
T/Devonian	11999

TD: 14,346 MD/12,633 TVD

MD 14,346'
TVD 12,633'

4/7/05 JMF