

Submit 1 Copy To Appropriate District
Office
District I
1625 N French Dr, Hobbs, NM 88240
District II
1301 W Grand Ave, Artesia, NM 88201
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S St. Francis Dr, Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

RECEIVED
HOBBS OIL
JAN 30 2012

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-29232 ✓
5. Indicate Type of Lease STATE ☒ FEE ☐ ✓
6. State Oil & Gas Lease No. LG 2842
7. Lease Name or Unit Agreement Name State 10 ✓
8. Well Number 1 ✓
9. OGRID Number 16696 ✓
10. Pool name or Wildcat Anderson Ranch Wolfcamp, SW ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4312 GR

SUNDRY NOTICES/REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐
2. Name of Operator OXY USA Inc.
3. Address of Operator P.O. Box 50250 Midland, TX 79710
4. Well Location Unit Letter 0 : 660 feet from the South line and 1980 feet from the East line Section 10 Township 16S Range 32E NMPM County Lea
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4312 GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram/ proposed completion or recompletion.

TD-12810' PBTD-8992' Perfs-9042-9610' CIBP-8992'
13-3/8" 68# csg @ 514' w/ 245sx, 17-1/2" hole, TOC-Surf-Circ
8-5/8" 24-32# csg @ 4260' w/ 1775sx, 11" hole, TOC-Surf-Circ
5-1/2" 17# csg @ 12798' w/ 950sx, 7-7/8" hole, TOC-7250'-CBL
1. RIH & tag CIBP @ 8992', M&P 25sx cmt
2. M&P 25sx cmt @ 7530-7430' WOC-Tag
3. Perf @ 5920', sqz 40sx cmt to 5820' WOC-Tag
4. Perf @ 4310', sqz 40sx cmt to 4210' WOC-Tag
5. Perf @ 3400', sqz 40sx cmt to 3300' WOC-Tag
6. Perf @ 2510', sqz 40sx to 2410' WOC-Tag
7. Perf @ 564' sqz 200sx cmt to Surface
10# MLF between plugs

Spud Date:

Rig Release Date:

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 1/27/12


Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY [Signature] TITLE Staff DATE 2-2-2012
Conditions of Approval (if any):

FEB 02 2012

OXY USA Inc. - Current
State 10 #1
API No. 30-025-29232

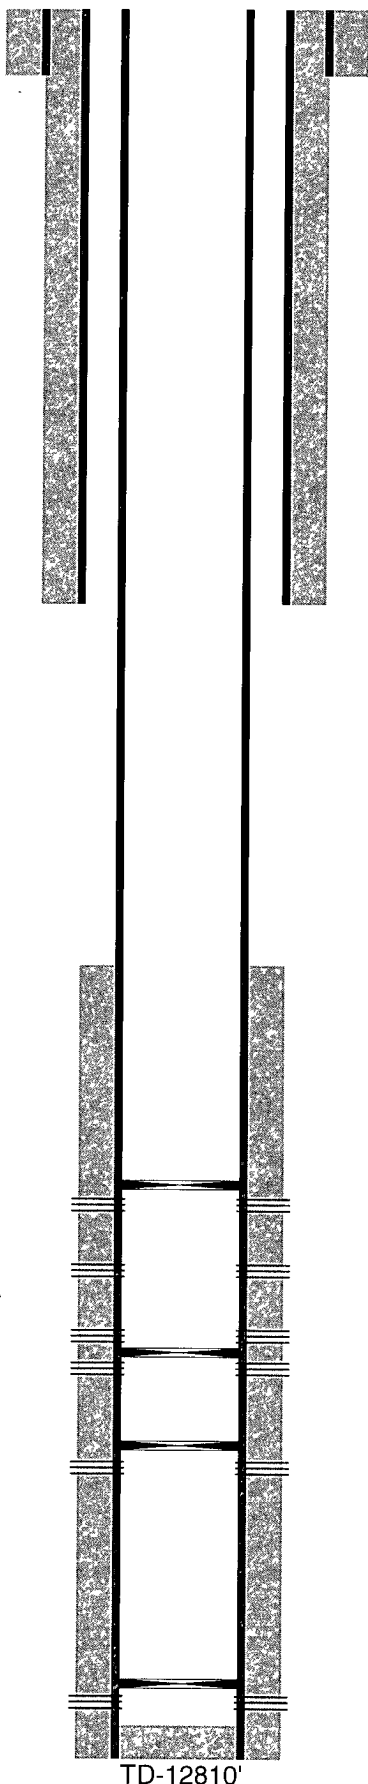

17-1/2" hole @ 514'
13-3/8" csg @ 514'
w/ 245sx-TOC-Surf-Circ

11" hole @ 4260'
8-5/8" csg @ 4260'
w/ 1775sx-TOC-Surf-Circ

2/07-CIBP @ 8992'

7/06-CIBP @ 9964'

6/06-CIBP @ 10600' w/ 35' cmt

6/06-CIBP @ 12620' w/ 35' cmt

Perfs @ 9042-9050'

Perfs @ 9604-9610'

Perfs @ 9870-9946'
Perfs @ 9968-10031'

Perfs @ 10806-10816'

7-7/8" hole @ 12810'
5-1/2" csg @ 12798'
w/ 950sx-TOC-7250'-CBL

Perfs @ 12661-12681'

TD-12810'

200sx @ 564'-Surface

6/06-CIBP @ 12620' w/ 35' cmt

Perfs @ 12661-12681'

7-7/8" hole @ 12810'
5-1/2" csg @ 12798'
w/ 950sx-TOC-7250'-CBL

TD-12810'