

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

RECEIVED
CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
FEB 13 2012

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)		WELL API NO. 30-025-34152
1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Chevron Midcontinent, L.P.		6. State Oil & Gas Lease No.
3. Address of Operator 15 Smith Road Midland, TX 79705		7. Lease Name or Unit Agreement Name Monument "12" State
4. Well Location Unit Letter <u>E</u> : <u>2083</u> feet from the <u>North</u> line and <u>983</u> feet from the <u>West</u> line Section <u>12</u> Township <u>19-S</u> Range <u>36-E</u> NMPM County <u>Lea</u>		8. Well Number: <u>16</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3745' KDB		9. OGRID Number: <u>4323</u>
		10. Pool name or Wildcat Monument ABO, N

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMM ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions. Diagram of

TD-7508' CIBP @7076'
11-3/4" 42# csg @ 400' w/300 sx, 14-3/4" hole, TOC Surf
8-5/8" 24# csg @ 2810' w/900 sx, 11" hole, TOC Surf
5-1/2" 15.5#/17# csg @ 7136' w/480 sx, 7-7/8" hole TOC 3900 WBD

1. MIRUWSU. NDWH. NUBOPE.
2. TIH tubing. TAG CIBP @ 7076'.
3. Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
4. Spot 25 sx of C cement 7076'-6976' CTOC.
5. Spot 25 sx of C cement 4100'-4000' CTOC.
6. P&S 100 sx of C cement 2860'-2582' CTOC. WOC & TAG. Shoe and bottom of salt.
7. P&S 40 sx of C cement 1584'-1484' CTOC. WOC & TAG. Top of salt.
8. P&S Circulate 150 sx of C cement 450'-surface.
9. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Matthew Brewer TITLE Representative DATE 2-10-12

Type or print name Matthew Brewer E-mail address: mbrewer01@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY: Matthew Whitaker TITLE Compliance Officer DATE 02-13-2012

Current

WELL NAME: MONUMENT "12" STATE No. 16		FORMATION: ABO	
Well Bore 1008555		FIELD: MONUMENT	
LOCATION: 2,083' FNL & 983' FWL	SEC. 12	API: 30-025-34152	
TOWNSHIP: 19S	COUNTY: LEA	CHEVNO: BP0631	
RANGE: 36E	STATE: NM	L5/L6: UCV010300	

GE: 3745' KDB to GE: 13' DF to GE: 12' Spud Date: 10/22/1997
 Completion Date: 1/3/1998
 Initial Formation: ABO
 Interval Completed: From: 7106' To: 7508'

TA'D 10/15/04


Hole 14-3/4"
 OD 11-3/4"
 Wt. 42 #
 Gr. H-40, ST&C
 @ 400'
 w/ 300 sx cmt
 TOC Surface

Initial Production: BOPD 25
 MCFPD 120
 BWPD 7

Completion Data:
 12-16-97 Acidize open hole w/4000 gals,
 20% HCL Acid & 2000 gals. 20% Resisoli +
 12/17/1997
 5-1/2" LOK-SET PKR w/1 87' F' Profile Nipple
 set @ 7090', w/6000# compression
 12/29/1997
 Acidize open hole w/345 BBLs HCL-acid
 & 66 tons CO2
 1-2-98 - Turned over to Production

Subsequent Workovers/Reconditioning/Repairs:
 3/11/1998 Acidize open hole with a total
 of 4000 gals 28% HCl w/ antisludge using
 inflatable packers and 4 settings.

10/15/04 Well TA'd F Trevino

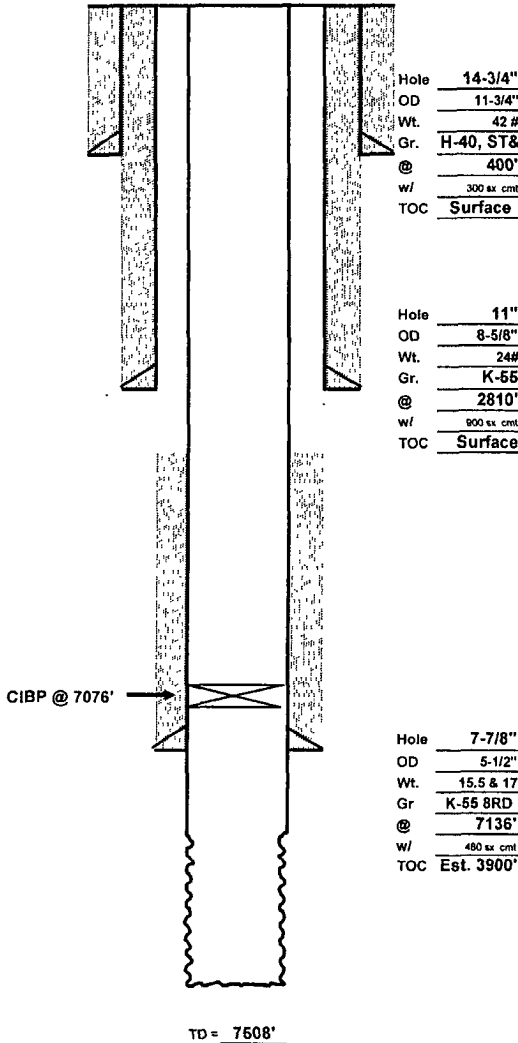

Hole 7-7/8"
 OD 5-1/2"
 Wt. 15.5 & 17
 Gr K-55 8RD
 @ 7136'
 w/ 480 sx cmt
 TOC Est. 3900'

Additional Remarks or Information:
 Cored well from 7208' to 7508'

On 5 1/2" casing, DV w/ external casing packer at 7125'

Proposed

WELL NAME: MONUMENT "12" STATE No. 16

Well Bore 1008555

LOCATION: 2,083' FNL & 983' FWL

TOWNSHIP: 19S

RANGE: 36E

SEC. 12

COUNTY: LEA

STATE: NM

FORMATION: ABO

FIELD: MONUMENT

API: 30-025-34152

CHEVNO: BP0631

L5/L6: UCV010300

GE: 3745' KDB to GE: 13' DF to GE: 12'

TA'D 10/15/04

Hole 14-3/4"

OD 11-3/4"

Wt. 42 #

Gr. H-40, ST&C

@ 400'

W/ 300 ex cmt

TOC Surface

Top of Salt @ 1534'

P&S Circ 150 sks 450 to surface

P&S 40 sks @ 1584-1484 WOC & TAG

Top of salt

Bottom of Salt @ 2632'

P&S 100 sks @ 2860-2582 WOC & TAG

Shoe plug and bottom of salt

Hole 11"

OD 8-5/8"

Wt. 24 #

Gr. K-55

@ 2810'

W/ 900 ex cmt

TOC Surface

Spot 25 sks @ 4100-4000

Spot 25 sks @ 7076-6976

CIBP @ 7076'

Hole 7-7/8"

OD 5-1/2"

Wt. 15.5 & 17

Gr. K-55 8RD

@ 7136'

W/ 480 ex cmt

TOC Est. 3900'

TD = 7508'

Additional Remarks or Information:

Cored well from 7208' to 7508'

On 5 1/2" casing, DV w/ external casing packer at 7125'